

# 2-WAY CROSSOVER

**5NDL38-16 & DE250-8**

Complete Simulation Graphs & Crossover Design

# Contents


|          |                                           |          |
|----------|-------------------------------------------|----------|
| <b>1</b> | <b>Acoustic Simulations</b>               | <b>2</b> |
| 1.1      | On-Axis SPL Response . . . . .            | 2        |
| 1.2      | Off-Axis Response (Directivity) . . . . . | 3        |
| 1.3      | Directivity Heatmap . . . . .             | 4        |
| 1.4      | Impedance Response . . . . .              | 5        |
| <b>2</b> | <b>Bill of Materials (BOM)</b>            | <b>6</b> |
| <b>3</b> | <b>Crossover Design</b>                   | <b>7</b> |
| 3.1      | Electrical Schematic . . . . .            | 9        |
| 3.2      | Baffle Schematic . . . . .                | 10       |

## 1


# Acoustic Simulations

Simulation graphs showing the frequency response of the drivers combined with the crossover. For more information on how to interpret these graphs, please refer to the beginner guide provided with your order.


## 1.1 On-Axis SPL Response

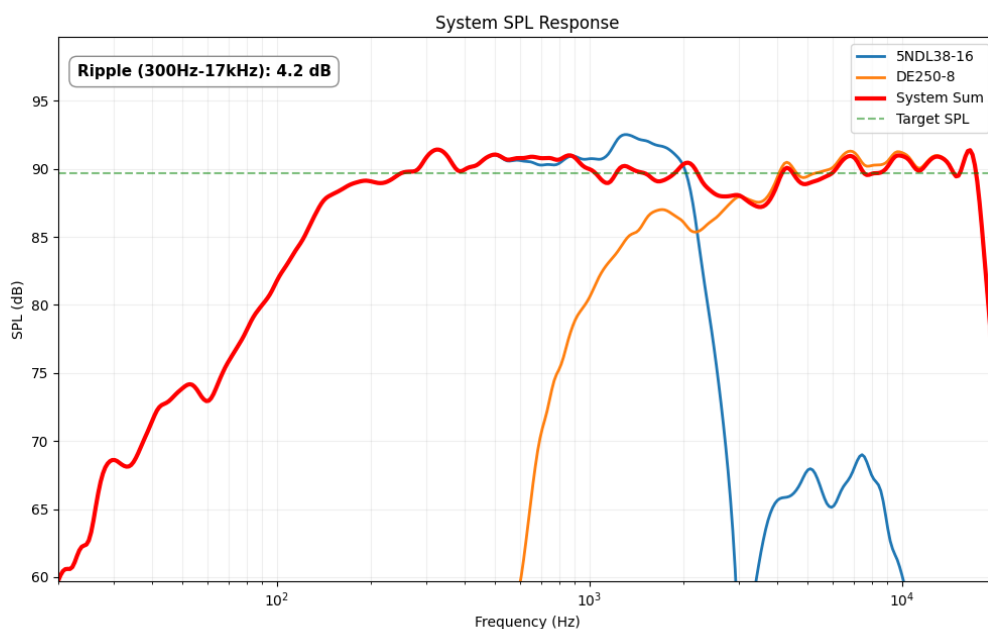


1.2 Off-Axis Response (Directivity)

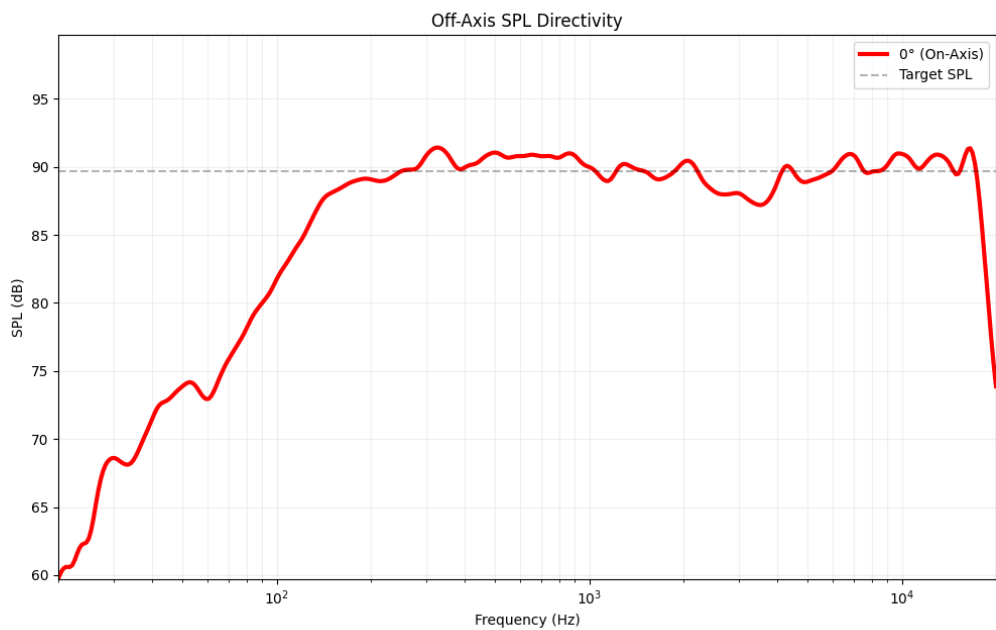

### 1.3 Directivity Heatmap



1.4 Impedance Response

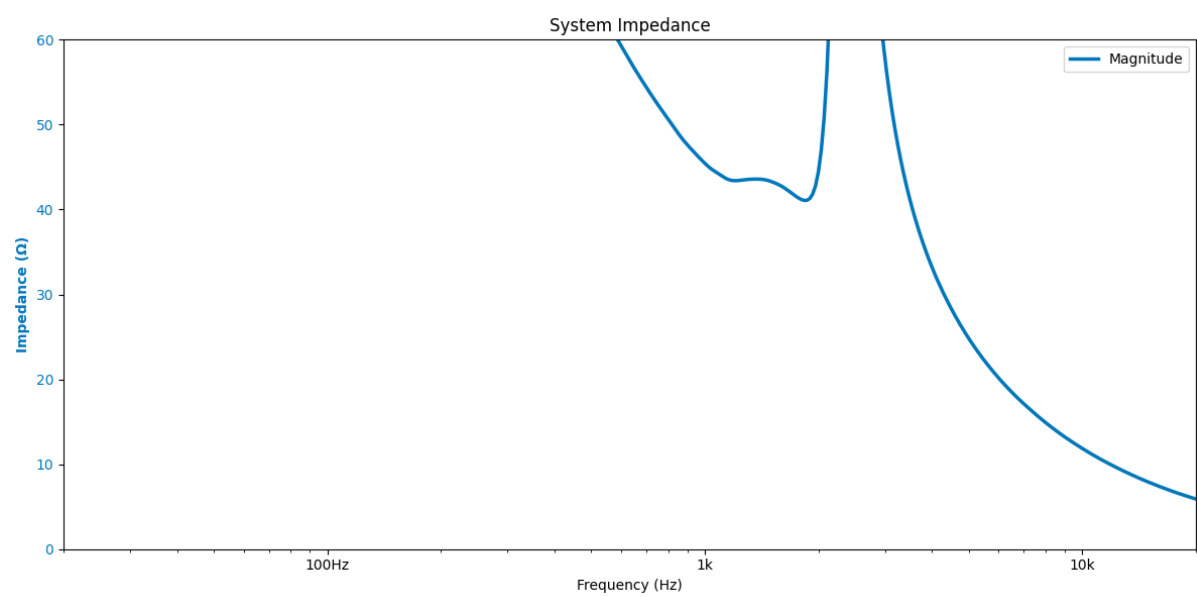

## 2

## Bill of Materials (BOM)

The following table lists all the components required to build one crossover. For a stereo pair, please double the quantities. Note that the provided prices and links are for reference only and may vary over time. Always check the supplier's website for the most up-to-date information.

| ID              | Component | Value         | Price (\$/€) | Buy Link             |
|-----------------|-----------|---------------|--------------|----------------------|
| L1              | Inductor  | 5.0 mH        | 12.19        | <a href="#">Link</a> |
| L2              | Inductor  | 2.2 mH        | 10.45        | <a href="#">Link</a> |
| C1              | Capacitor | 1.2 $\mu$ F   | 1.49         | <a href="#">Link</a> |
| L3              | Inductor  | 4.7 mH        | 11.39        | <a href="#">Link</a> |
| R1              | Resistor  | 75.0 $\Omega$ | 0.99         | <a href="#">Link</a> |
| L4              | Inductor  | 0.95 mH       | 8.45         | <a href="#">Link</a> |
| C2              | Capacitor | 1.1 $\mu$ F   | 1.49         | <a href="#">Link</a> |
| C3              | Capacitor | 1.6 $\mu$ F   | 1.49         | <a href="#">Link</a> |
| C4              | Capacitor | 8.2 $\mu$ F   | 0.99         | <a href="#">Link</a> |
| R2              | Resistor  | 8.2 $\Omega$  | 0.99         | <a href="#">Link</a> |
| Estimated Total |           |               | 49.92        |                      |


**3**

## Crossover Design

This section provides the electrical schematic required to build the crossover and achieve the acoustic results presented earlier. If you need help understanding this diagram, please refer to the beginner guide.




3.1 Electrical Schematic

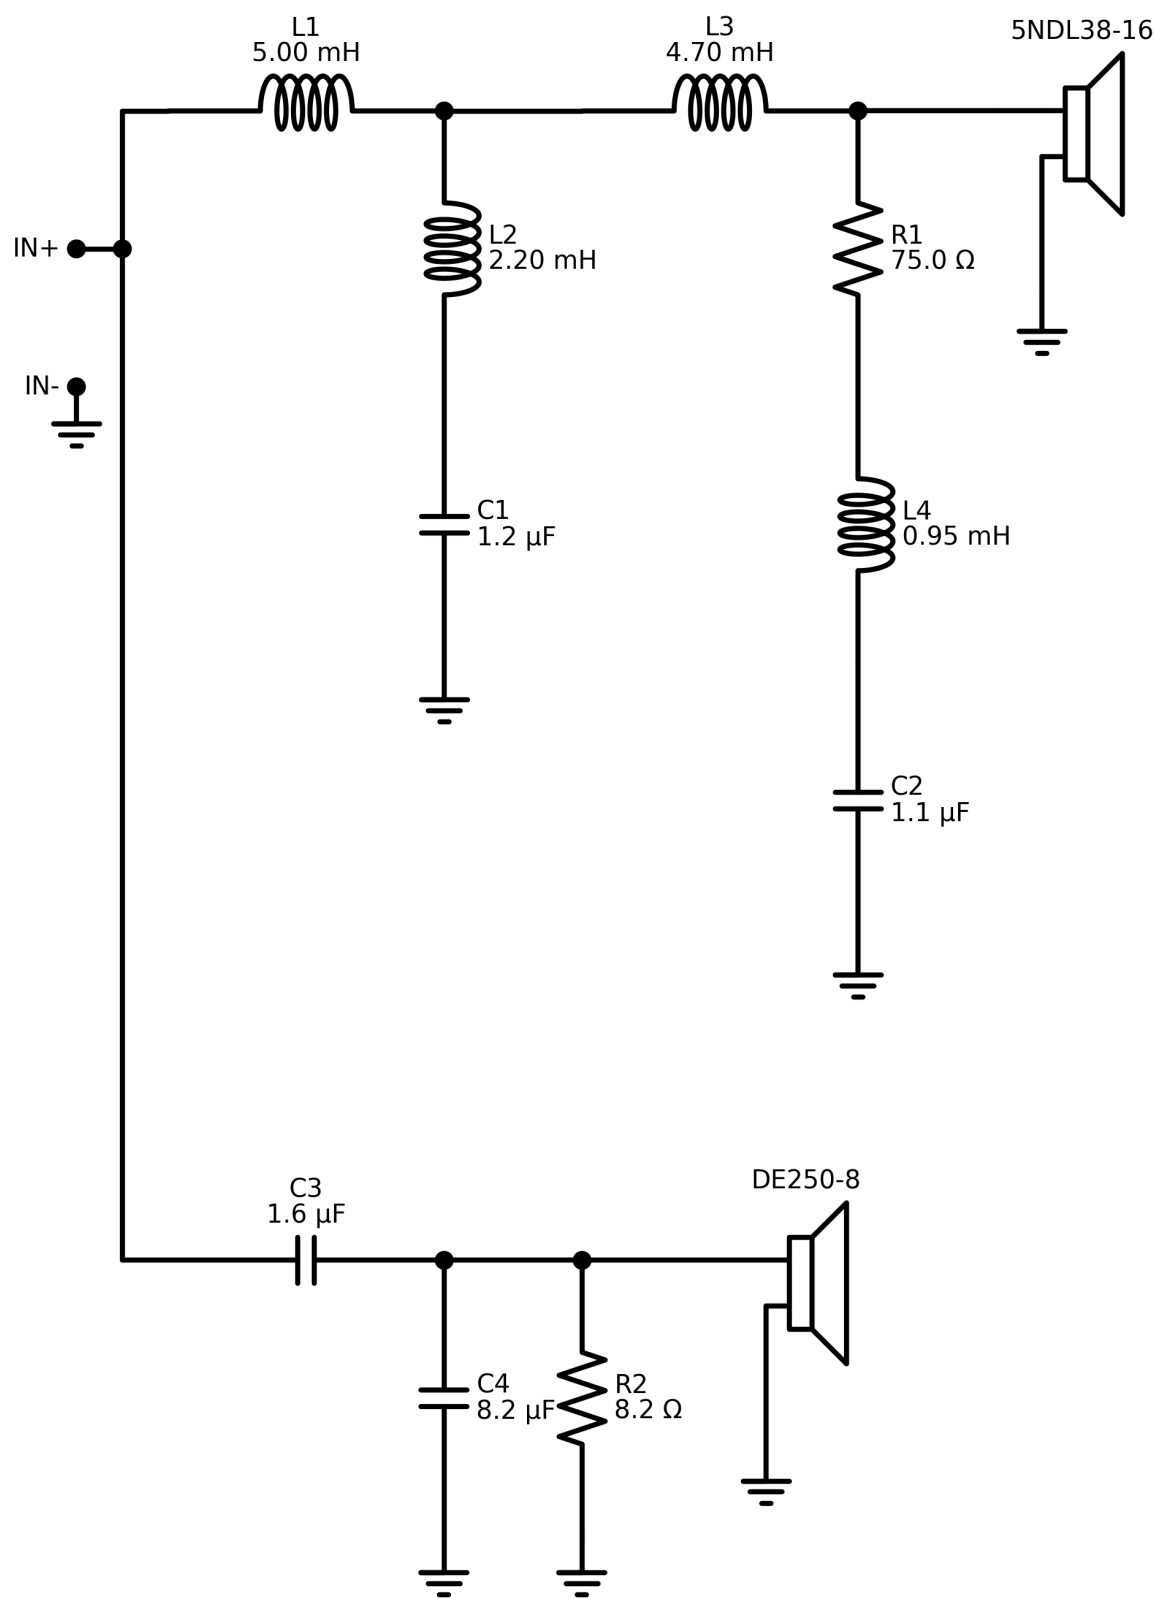

### 3.2 Baffle Schematic

#### Baffle Geometry

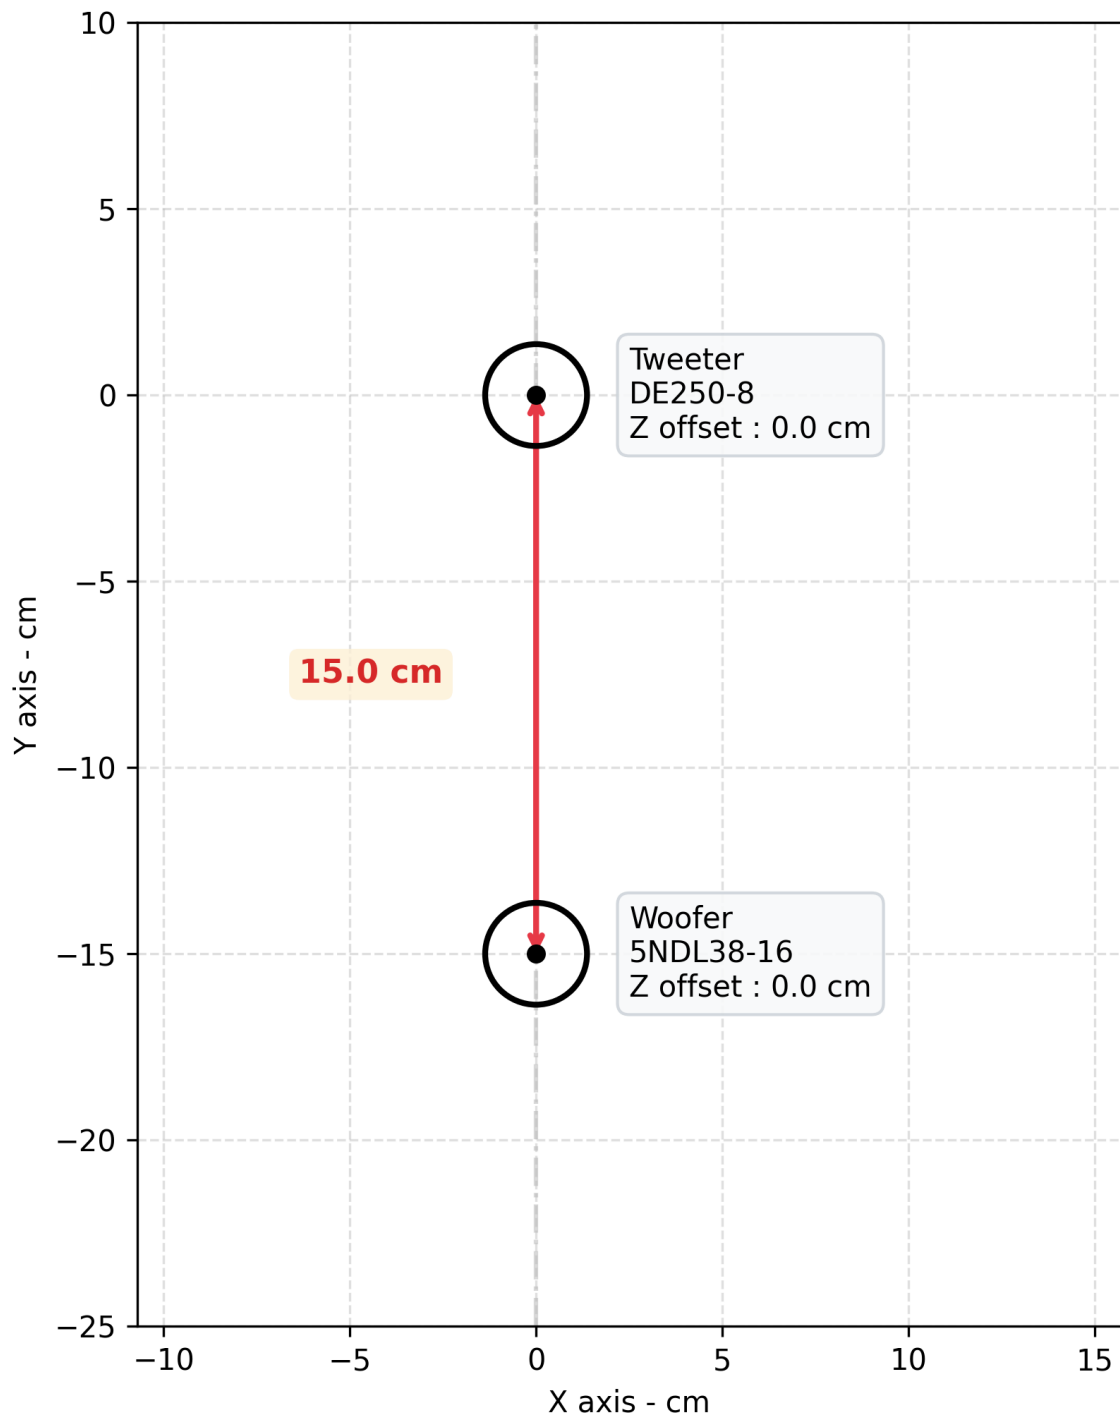

# THANK YOU FOR YOUR SUPPORT

As you build the crossover for your

ations, run into issues, or just want to  
ur finished build, please feel free to  
essages!