

Contents


1 Acoustic Simulations

Simulation graphs showing the frequency response of the drivers combined with the crossover. For more information on how to interpret these graphs, please refer to the beginner guide provided with your order.


1.1 On-Axis SPL Response

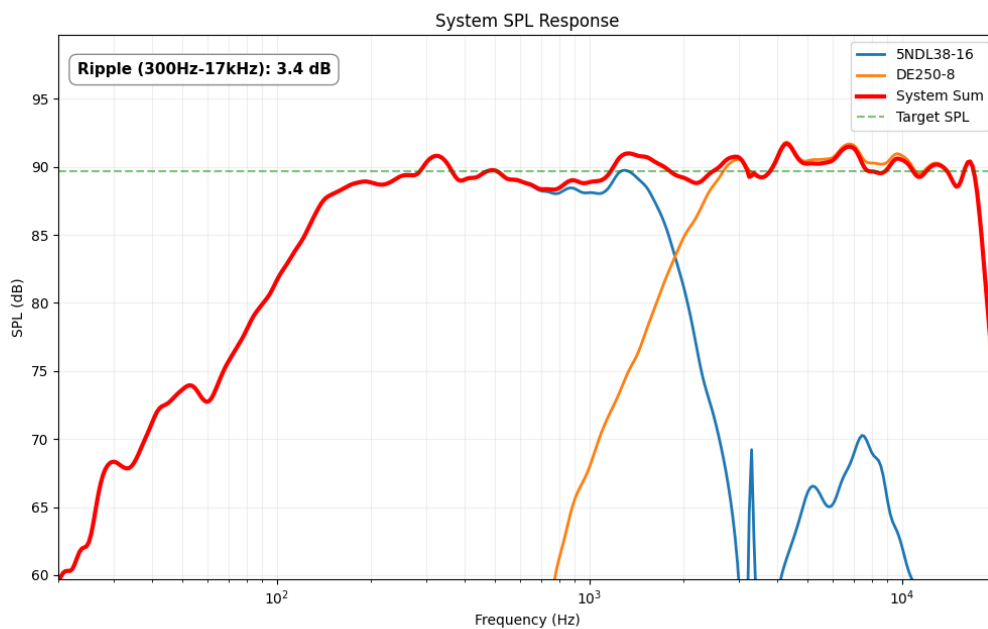

1.2 Off-Axis Response (Directivity)

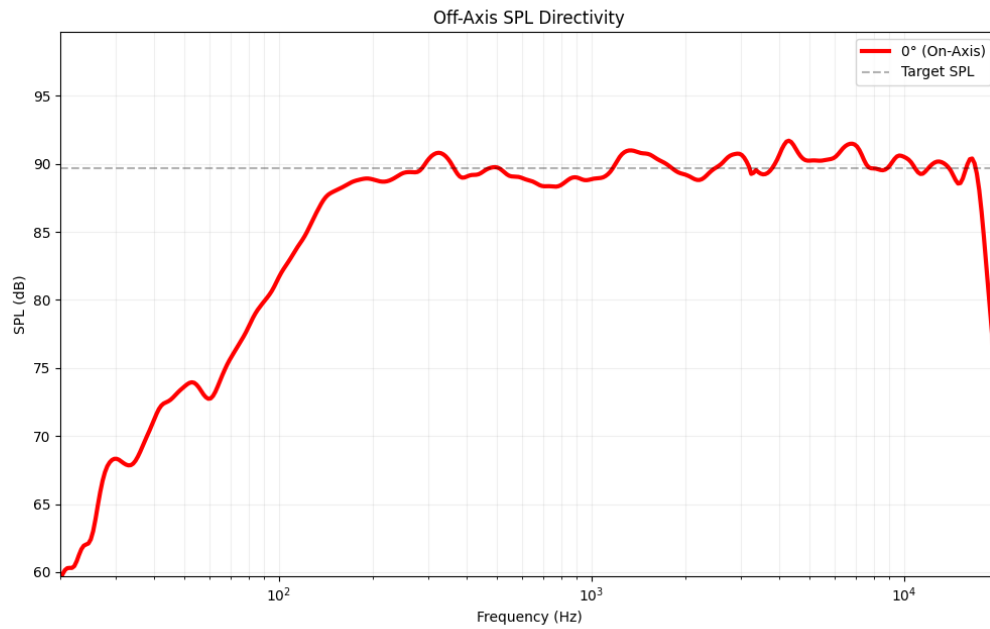


1.3 Directivity Heatmap

A large rectangular area intended for a Directivity Heatmap. The text '5NDL38-16_X_DE250-8_Directivity_Heatmap.png' is visible in the lower-left corner of this area, likely indicating the source or name of the image.

5NDL38-16_X_DE250-8_Directivity_Heatmap.png

1.4 Impedance Response

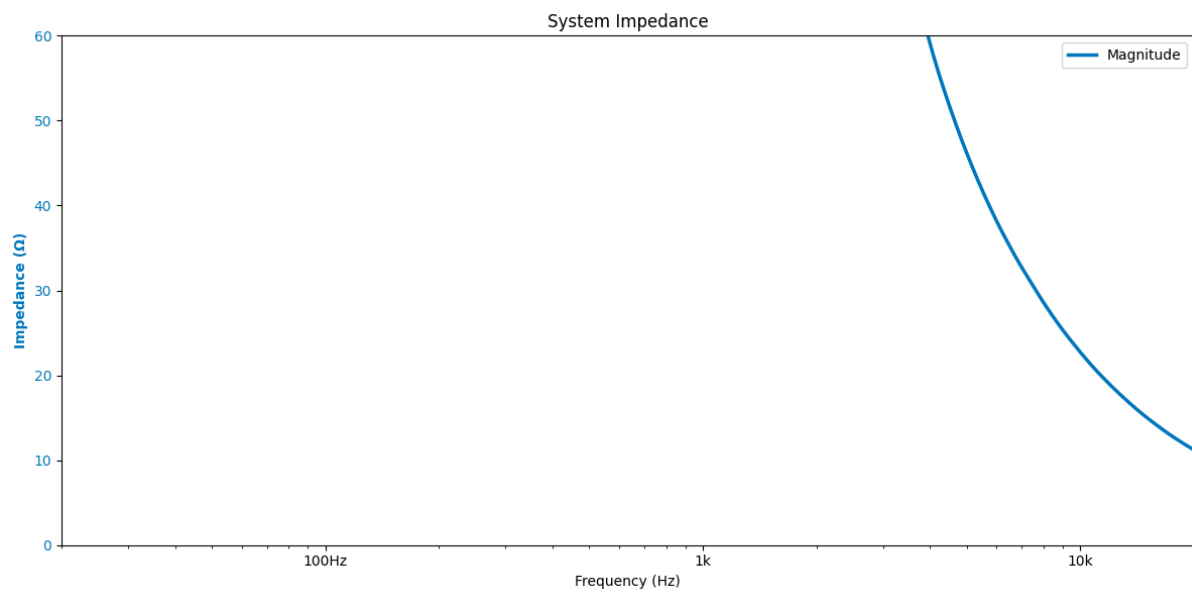

2 Bill of Materials (BOM)


The following table lists all the components required to build one crossover. For a stereo pair, please double the quantities. Note that the provided prices and links are for reference only and may vary over time. Always check the supplier's website for the most up-to-date information.

ID	Component	Value	Price (\$/€)	Buy Link
C1	Capacitor	0.39 μ F	1.49	Link
L1	Inductor	5.0 mH	12.19	Link
C2	Capacitor	0.39 μ F	1.49	Link
L2	Inductor	5.0 mH	12.19	Link
C3	Capacitor	0.51 μ F	1.49	Link
L3	Inductor	5.0 mH	12.19	Link
C4	Capacitor	1.0 μ F	0.79	Link
L4	Inductor	5.0 mH	12.19	Link
C5	Capacitor	0.68 μ F	0.59	Link
C6	Capacitor	3.9 μ F	0.99	Link
L5	Inductor	0.42 mH	8.45	Link
Estimated Total			64.05	

3 Crossover Design


This section provides the electrical schematic required to build the crossover and achieve the acoustic results presented earlier. If you need help understanding this diagram, please refer to the beginner guide.


3.1 Electrical Schematic

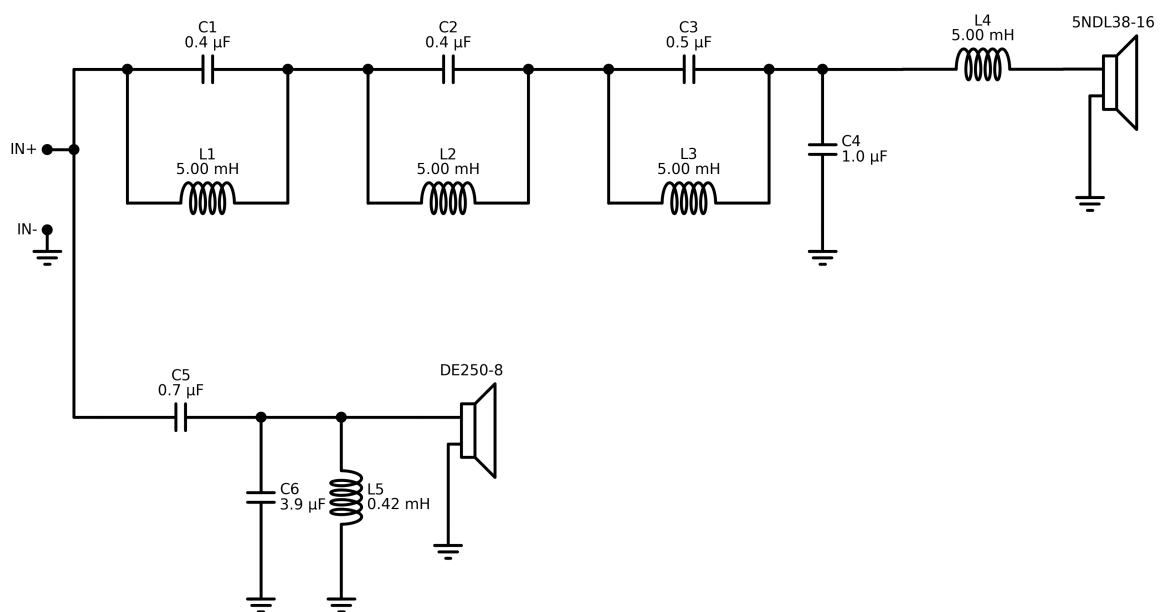

3.2 Baffle Schematic

Baffle Geometry

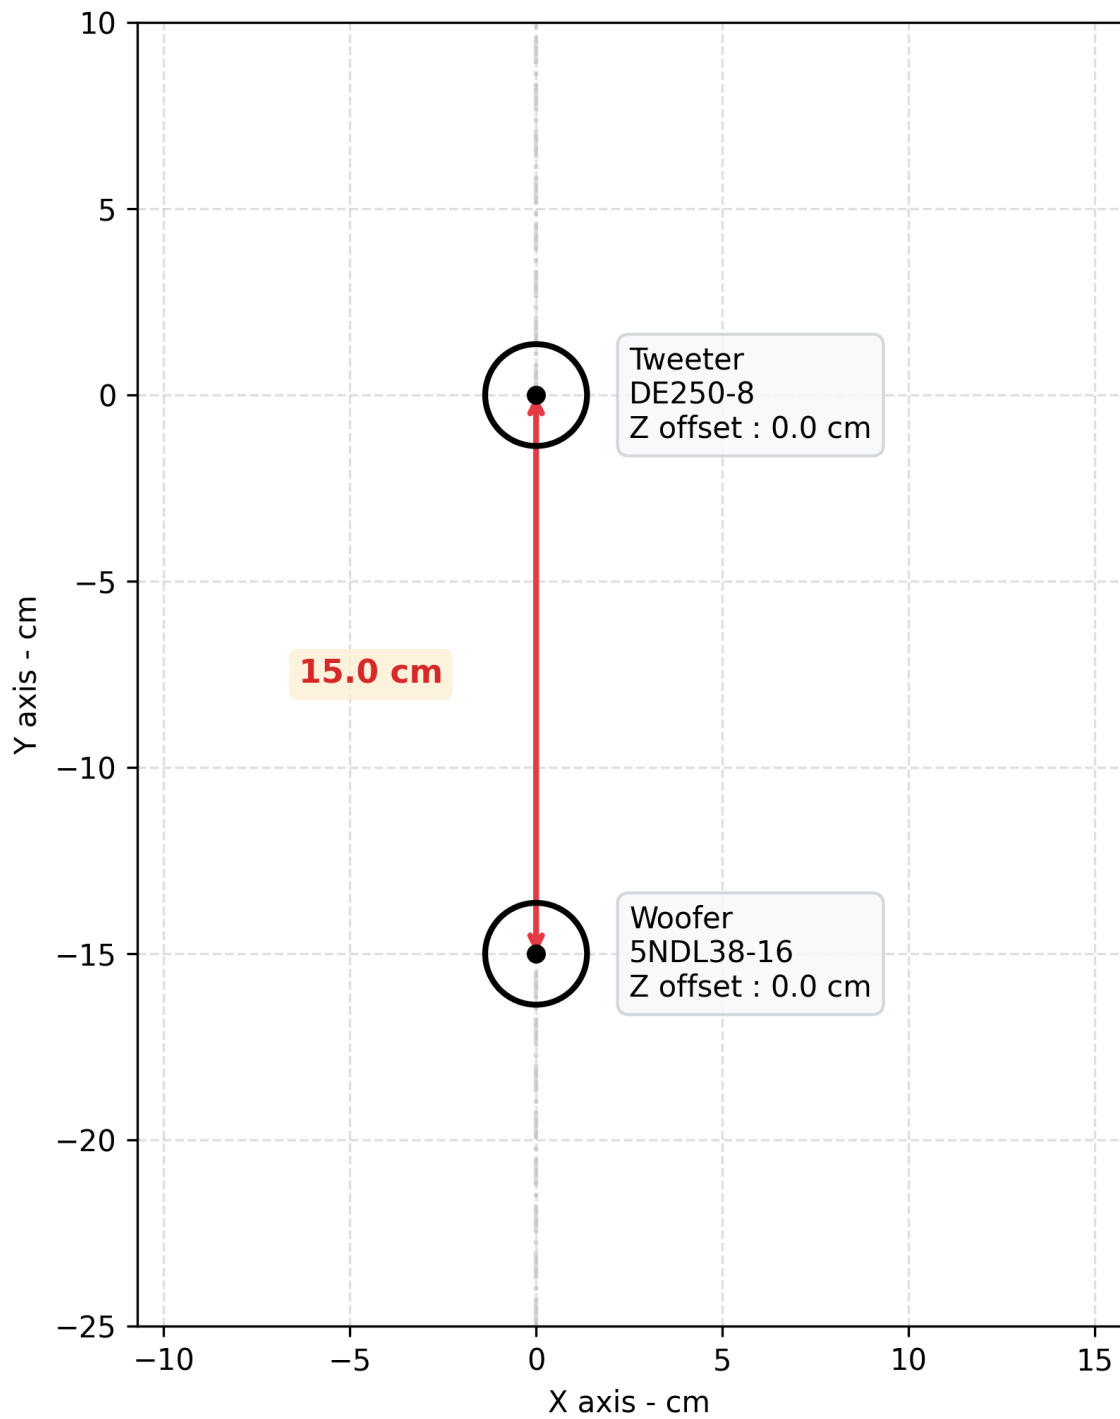



www.etsy.com/shop/Audio440