

YANGYANG/Intl(RKNY) RWY 15 RNAV KAE 2E, RNAV BIKSI 2E RNAV PILIT 2E

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables


	Remarks		-		•
	VPA/ Navigation TCH* specification	RNAV 1	RNAV 1	RNAV 1	RNAV 1
	VPA/ TCH*	ı	-	•	•
	Coordinates	37°58'41.3"N 128°45'15.6"E	37°54'09.1"N 128°45'15.0"E	37°49'03.2"N 128°45'14.4"E	37°42'02.8"N 128°45'13.6"E
	Speed (kt)	ı	•	ı	•
	Altitude (ft)	ı	- 7 000	ı	@10 000
	Turn direction	-	=	ı	=
	Distance (NM)	5.6	4.5	5.1	7.0
	Fly- Course/Track Distance Turn Altitude Speed over $^{\circ}$ $^{\circ}$ $^{\circ}$ (k1)	150(141.0) 5.6	189(180.1) 4.5	189(180.1) 5.1	189(180.1) 7.0
	Fly- over	1	-		1
	-	NY050	NY070	NY090	KAE
. 2E	Path Waypoin Descriptor Identifier	CF	TF	TF	TF
RNAV KAE 2E	Serial Number	100	005	003	004

	Remarks	i	i	ı	i	i
	VPA/ Navigation TCH* specification	RNAV 1				
	VPA/ TCH*	-	-	ı	-	•
	Coordinates	37°58'41.3"N 128°45'15.6"E	37°54'09.1"N 128°45'15.0"E	37°49'03.2"N 128°45'14.4"E	37°42'02.8"N 128°45'13.6"E	37°40'32.0"N 128°35'04.0"E
	Speed (kt)	i	ı	1	i	ı
	Altitude (ft)	ı	-7 000	ı	@10 000	ı
	Turn direction	1	ı	ı	ı	ı
	Distance (NM)	5.6	4.5	5.1	7.0	8.2
	Serial Path Waypoint Fly-Course/Track Distance Turn Altitude Speed Number Descriptor Identifier over ${}^{\circ}M({}^{\circ}T)$ (NM) direction (ft) (kt)	150(141.0) 5.6	189(180.1) 4.5	189(180.1) 5.1	189(180.1) 7.0	268(259.4) 8.2
	Fly- over					
	Waypoint Identifier	050YN	070YN	NY090	KAE	BIKSI
l 2E	Path Descriptor	CF	TF	¥	TF.	ΤF
NAV BIKSI 2E	Serial Number	100	002	003	004	900

Speed (kt) Coordinates VPA/ Navigation Remarks TCH* specification	37°58'41.3"N 128°45'15.6"E - RNAV 1	37°54'09.1"N 128°45'15.0"E	- 37°49'03.2"N 128°45'14.4"E - RNAV 1	37°42'02.8"N 128°45'13.6"E - RNAV 1	- 1/71149
Serial Path Waypoint Fly- Course/Track Distance Turn Altitude Speed Number Descriptor Identifier over $^{\circ}$ N($^{\circ}$ T) (NM) direction (ft) (kt)	•	-7 000	1	@10 000	
Turn direction		1	1	ı	,
Distance (NM)	41.0) 5.6	4.5	5.1	180.1) 7.0	30.0
Course/Track °M(°T)	150(141.0)	189(180.1)	189(180.1)	189(180.1)	130/121 0)
Fly- over				ı	
Waypoint Identifier	NY050	NY070	040YN	KAE	HIIG
Path Descriptor	ხ	¥	¥	¥	þ
Serial Number	100	002	003	004	00.5

* The term TCH equates to the use of the term RDH, within this context of the FAS data block.


AIRAC AIP AMDT 5/21B Effective : 1600UTC 16 JUN 2021

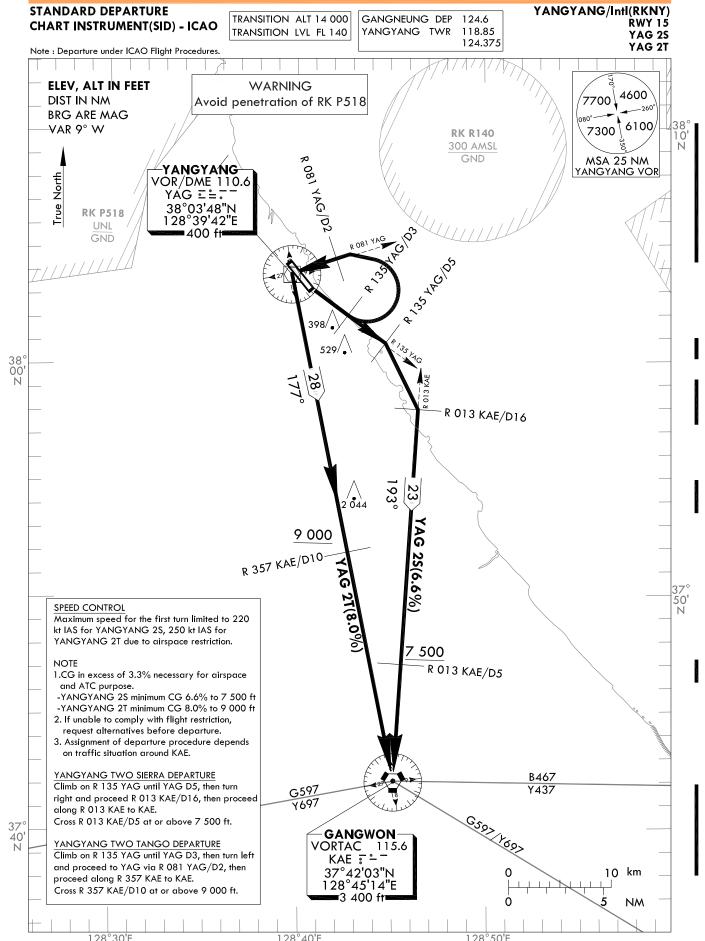

INTENTIONALLY

LEFT

BLANK

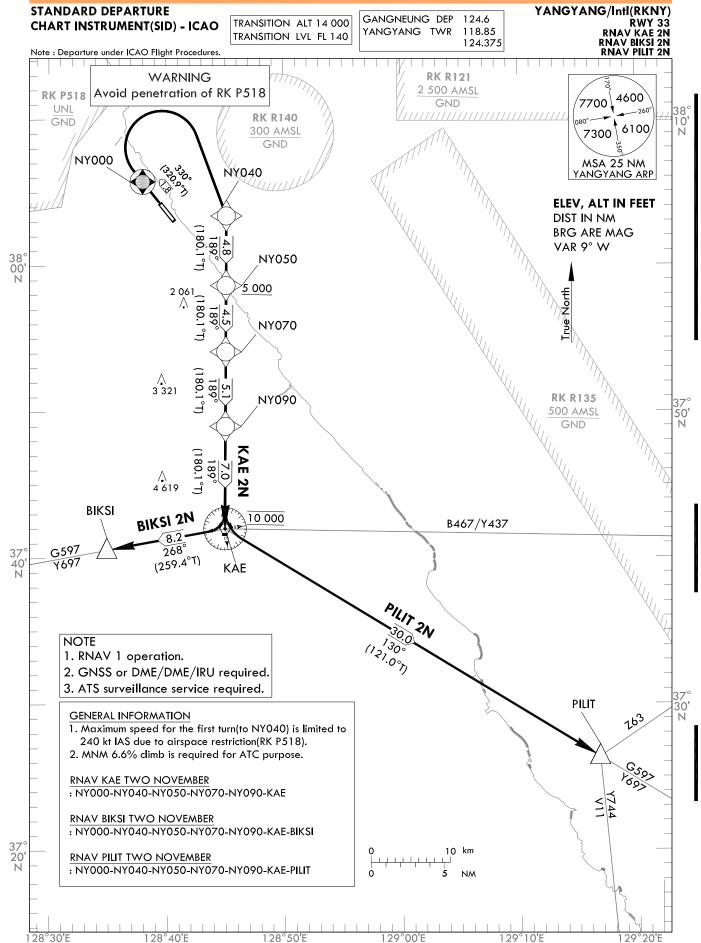

YANGYANG/Intl(RKNY) RWY 33 RNAV KAE 2N, RNAV BIKSI 2N RNAV PILIT 2N

AERONAUTICAL DATA TABULATION


Standard Instrument Departure Procedure Coding Tables

Remarks	•	ı	1	ı	1	
VPA/ Navigation TCH* specification	RNAV 1					
VPA/ TCH*	•	<u>*</u> ₽	ı	1	-	ı
Coordinates	38°05'45.5"N 128°38'00.9"E	38°03'27.0"N 128°45'16.2"E	37°58'41.3"N 128°45'15.6"E	37°54'09.1"N 128°45'15.0"E	37°49'03.2"N 128°45'14.4"E	37°42'02.8"N 128°45'13.6"E
Speed (kt)	-240	-240	ı		•	1
Altitude Speed (ft)	ı	1	+5 000	1	1	@10 000
/Track Distance Turn (°T) (NM) direction	-	æ	-	ı	=	
Distance (NM)	20.9) 1.8	•	4.8	4.5	5.1	7.0
Course/Track °M(°T)	ү 330(320.9)		189(180.1)	189(180.1)	189(180.1)	189(180.1)
Fly- over	>	ı			ı	1
Waypoint Identifier	NY000	NY040	NY050	NY070	040YN	KAE
Serial Path Waypoint Fly- Course/ Number Descriptor Identifier over °M(°	P	DF	TF	Ħ	TF	TF
Serial P Number Des	100	002	003	004	900	900

					I			I
	Remarks	•	•	•	•	•	•	1
	VPA/ Navigation TCH* specification	RNAV 1						
	VPA/ TCH*	ı	*HD1	ı	ı	ı		ı
	Coordinates	38°05'45.5"N 128°38'00.9"E	38°03'27.0"N 128°45'16.2"E	37°58'41.3"N 128°45'15.6"E	37°54'09.1"N 128°45'15.0"E	37°49'03.2"N 128°45'14.4"E	37°42'02.8"N 128°45'13.6"E	37°40'32.0"N 128°35'04.0"E
	Speed (kt)	-240	-240					
	Altitude Sp (ft)	ï	ï	+5 000	ī	ï	@10 000	1
	Turn direction	-	R	ı	ı	-	ı	ı
	Distance (NM)	1.8		4.8	4.5	5.1	7.0	8.2
	Serial Path Waypoint Fly- Course/Track Distance Number Descriptor Identifier over ${}^{\circ}M({}^{\circ}T)$ (NM)	330(320.9)	ı	189(180.1)	189(180.1)	189(180.1)	189(180.1)	268(259.4)
	Fly-) 330(
	Waypoint Identifier	NY000	NY040	NY050	NY070	040YN	KAE	BIKSI
N7	Path Descriptor	CF	DF	¥	¥	Ŧ	Ŧ	¥
KNAV BIKSI ZN	Serial Number	100	005	003	004	500	900	200

Coordinates VPA/ Navigation Remarks TCH* specification	38°05'45.5"N 128°38'00.9"E - RNAV 1	38°03'27.0"N 128°45'16.2"E TCH* RNAV 1	37°58'41.3"N 128°45'15.6"E - RNAV 1	37°54'09.1"N 128°45'15.0"E	37°49'03.2"N 128°45'14.4"E	37°42'02.8"N 128°45'13.6"E - RNAV 1	TIIO OCIT 1000 111
Coordi	38°05'45.5"N	38°03'27.0"N	37°58'41.3"N	37°54'09.1"N	37°49'03.2"N	37°42'02.8"N	37°34'31 N"N 130°17'30 8"E
Speed (kt)	-240	-240	ı	ı	ı	ı	ı
Altitude (ft)	•	1	+5 000	ı	1	@10 000	•
Turn direction	=	R	-	=	-	1	1
/Track Distance °T) (NM)	1.8		4.8	4.5	5.1	7.0	000
Course/Track °M(°T)	330(320.9)		189(180.1)	189(180.1)	189(180.1)	189(180.1)	101017061
Fly- over	Y	ı				ı	
Waypoint Identifier	NY000	NY040	NY050	NY070	NY090	KAE	H
Serial Path Waypoint Fly- Course/ Number Descriptor Identifier over "M(°	4D	DF	ŦŢ	JI.	±	11	
Serial Number	100	002	003	004	900	900	100

 st The term TCH equates to the use of the term RDH, within this context of the FAS data block.

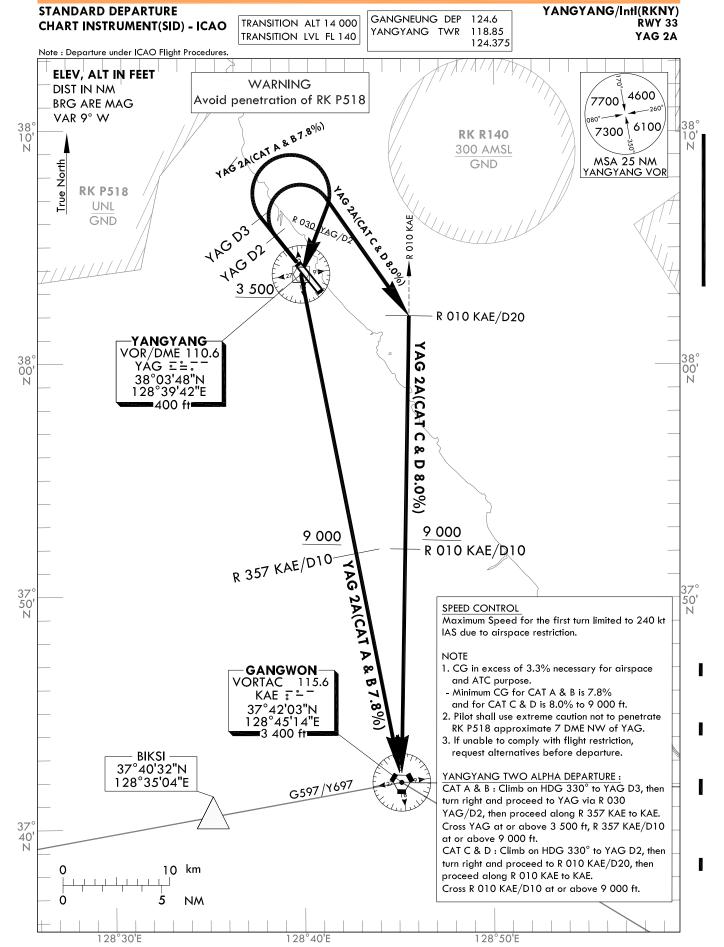

INTENTIONALLY

LEFT

BLANK