


## DVI over DVI Dual Port PCB Through Board Receptacle DVI-DP-29-C-G-HN-4

29 Pin DVI Connector over 29 Pin DVI Connector (Port space 20.40mm)  
With PCB boardlocks & Ivory coloured plastic inserts

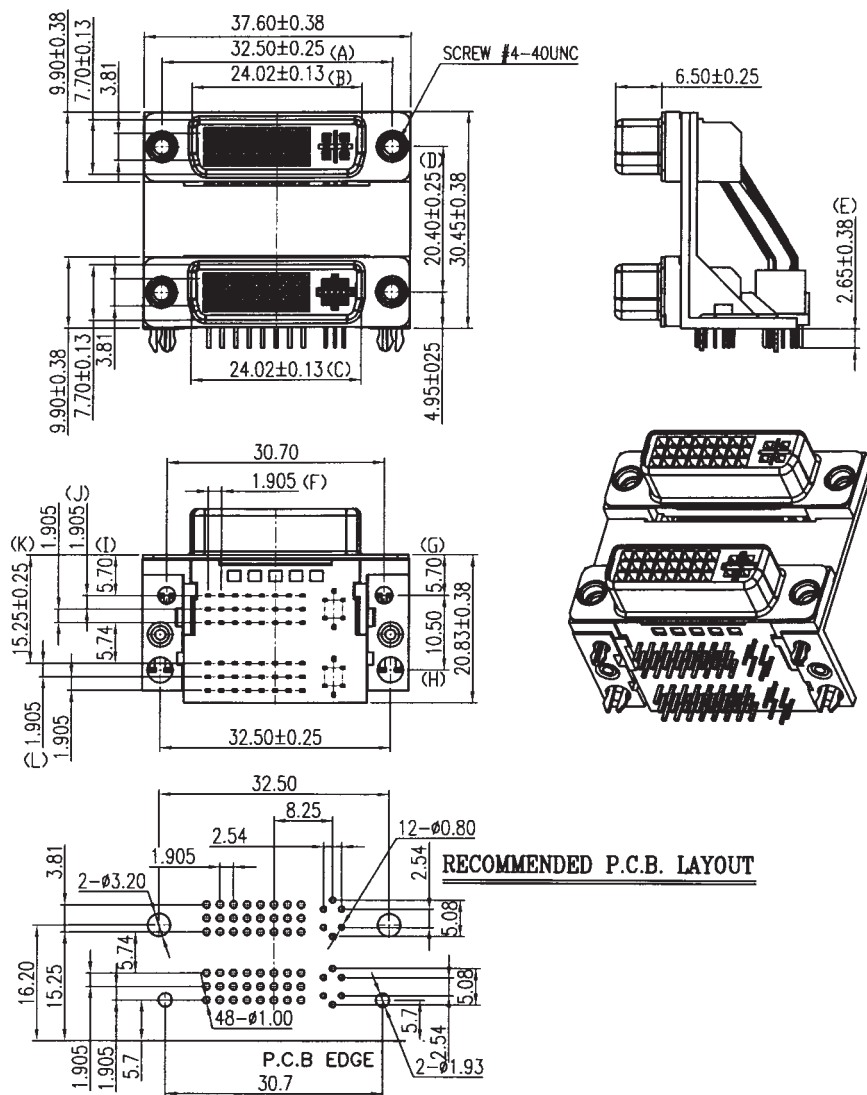

### Ordering Information:

**DVI-DP-29-C-G-HN-4**

### Specification:

Insulator Material:	PBT UL94V-0 Ivory colour
Contact Material:	Copper Alloy
Shell Material:	SPCC
Shield Material:	Stainless Steel
PCB Boardlock:	Copper Alloy
Contact Plating:	Gold flash over Ni underplate (mating contacts)
Solder Tail Plating:	Tin over Ni
Current Rating:	1.5A per contact
DWV:	500V AC (RMS)
Insulation Resistance:	1000M $\Omega$ min.
Contact Resistance:	30m $\Omega$ Max.(upper)20m $\Omega$ Max.(lower)
Operating Temperature:	-55°C to +85°C
Mating/Unmating Force:	4.5 Kgf Max. / 1.0 Kgf Min.