RONCH EXCEL INDUSTRIES PVT. LTD.

(EXCEL GREENTECH PVT. LTD.,)

Facade Lighting Solutions

For safe, pleasant and connected environments

CATALOGUE 2024

DESIGN SIMULATIONS | COMPLETE FACEDE LIGHTS

DMX PROGRAMMING | INSTALLATION & COMMISIONING

RONCH EXCEL INDUSTRIES PVT. LTD.
(EXCEL GREENTECH PVT. LTD.,)

Unit I: Plot No 183/5 and 183/6, Panchal Udyog Nagar, Village Bhimpore, Nani Damam, Damam - 396210
Unit II: D 161-162, Hosiery Complex, Phase-II, Noida - 201305 rajesh@excelite.in www.excelgreentech.in
Mr. Rajesh Potti : +91 9999956837, Mr. Ronak: +91 8898444466, Mr. Mehboob Akter: +91 9718305111

PROJECTORS

Product Features

- Quality metal-core PCB with super drive technology
- Anti reflection optical technology offers maximum visual comfort
- Advanced optical lens
- Reliable driving technology
- Excellent thermal management ensures long LED life
- Reliable in all environmental conditions
- Constant locking hinge with adjustable 15º step tilt angle
- Different light distributions with minimum split on light edge
- Wide ranage of light colours
- DMX — Superior controller with more updated functions

Operating Voltage	240Vac/24Vdc
Power Consumption	6W to 600W
CRI	> 80
LED Type/Make	High Power LED/Cree,Osram,Lumiled
Beam Angle	Symmetric and Assymmetric
Material	Aluminium Die Casting + Glass
Ambient Temperature	-20ºC ~ +50ºC
Life Time	50,000 Hours/L70 at 25ºC
Cable Length	300mm with IP 68 Connector
Control System	Static/Dynamic(DMX or RDM)
IP Rating	IP66
Ik Rating	IK08

RGB RGBW 2400K 2700K 3000K 4000K 5700K 6500K

Options/Accessories:

Spike

Garden Mount

Anti Glare Hood/Snoot

WALLWASHERS

Product Features

- Quality metal-core PCB with super drive technology
- Anti reflection optical technology offers maximum visual comfort
- Advanced optical lens
- Reliable driving technology
- Excellent thermal management ensures long LED life
- Reliable in all environmental conditions
- Constant locking hinge with adjustable 15º step tilt angle
- Different light distributions with minimum split on light edge
- Wide rnage of light colours
- DMX — Superior controller with more updated functions

Operating Voltage	24Vdc with shared Drivers
Power Consumption	5W to 96W
CRI	> 80
LED Type/Make	High Power LED/Cree,Osram,Lumiled
Beam Angle	Symmetric and Assymmetric
Material	Aluminium Extrusion + Glass
Ambient Temperature	-20ºC ~ +50ºC
Life Time	50,000 Hours/L70 at 25ºC
Cable Length	300mm with IP 68 Connector
Control System	Static/Dynamic(DMX or RDM)
IP Rating	IP66
Ik Rating	IK08

RGB RGBW 2400K 2700K 3000K 4000K 5700K 6500K

Options/Accessories:

* Standard Length - 1000mm.
* 300mm and 500mm also available.
* Customisation as per customer requirements.

INGROUND LIGHTS

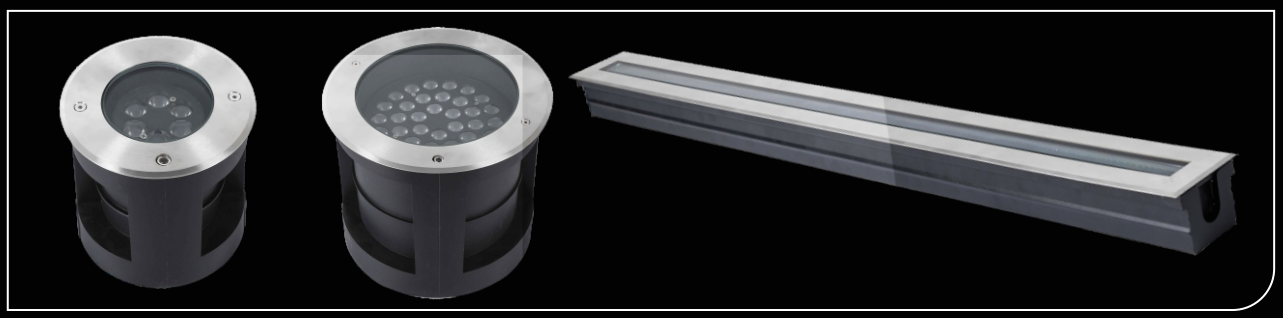

Product Features

- Quality metal-core PCB with super drive technology
- Anti reflection optical technology offers maximum visual comfort
- Advanced optical lens
- Reliable driving technology
- Excellent thermal management ensures long LED life
- Reliable in all environmental conditions
- Constant locking hinge with adjustable 15° step tilt angle
- Different light distributions with minimum split on light edge
- Wide rnage of light colours
- DMX — Superior controller with more updated functions

Operating Voltage	240Vac/24Vdc
Power Consumption	1W to 48W
CRI	> 80
LED Type/Make	High Power LED/Cree,Osram,Lumiled
Beam Angle	Symmetric and Assymmetric
Material	Aluminium Die Casting + Glass
Ambient Temperature	-20ºC ~ +50ºC
Life Time	50,000 Hours/L70 at 25ºC
Cable Length	300mm with IP 68 Connector
Control System	Static/Dynamic(DMX or RDM)
IP Rating	IP66
Ik Rating	IK08

RGB · RGBW · 2400K · 2700K · 3000K · 4000K · 5700K · 6500K

Options/Accessories:

HoneyComb Mesh

Concentric Cell

Diffused Glass

LINEAR LIGHTS

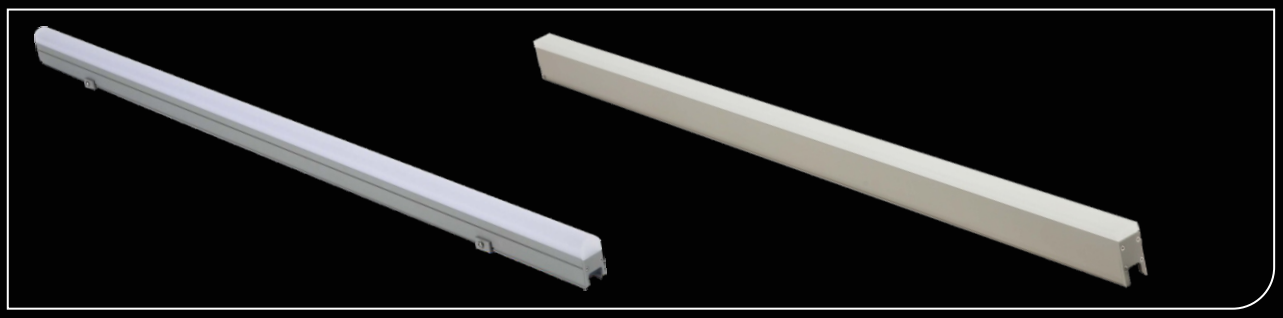

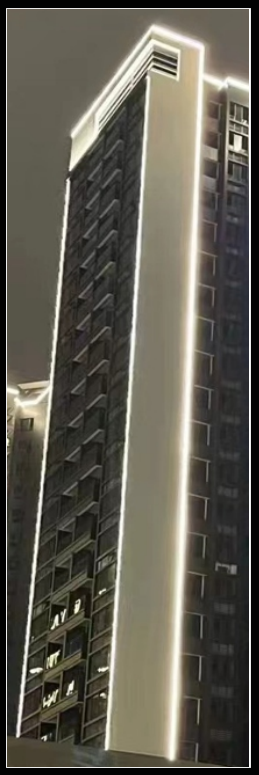

Product Features

- Quality metal-core PCB with super drive technology
- Anti reflection optical technology offers maximum visual comfort
- Advanced optical lens
- Reliable driving technology
- Excellent thermal management ensures long LED life
- Reliable in all environmental conditions
- Constant locking hinge with adjustable 15° step tilt angle
- Different light distributions with minimum split on light edge
- Wide rnage of light colours
- DMX — Superior controller with more updated functions

Operating Voltage	24Vdc with shared Drivers
Power Consumption	5W to 18W
CRI	> 80
LED Type/Make	High Power LED/Cree,Osram,Lumiled
Beam Angle	Symmetric and Assymmetric
Material	Aluminium Extr. + PC/Acrylic/Glass
Ambient Temperature	-20ºC ~ +50ºC
Life Time	50,000 Hours/L70 at 25ºC
Cable Length	300mm with IP 68 Connector
Control System	Static/Dynamic(DMX or RDM)
IP Rating	IP66
Ik Rating	IK08

RGB · RGBW · 2400K · 2700K · 3000K · 4000K · 5700K · 6500K

Options/Accessories:

* Standard Length - 1000mm.
* 300mm and 500mm also available.
* Customisation as per customer requirements.

PIXEL LIGHTS

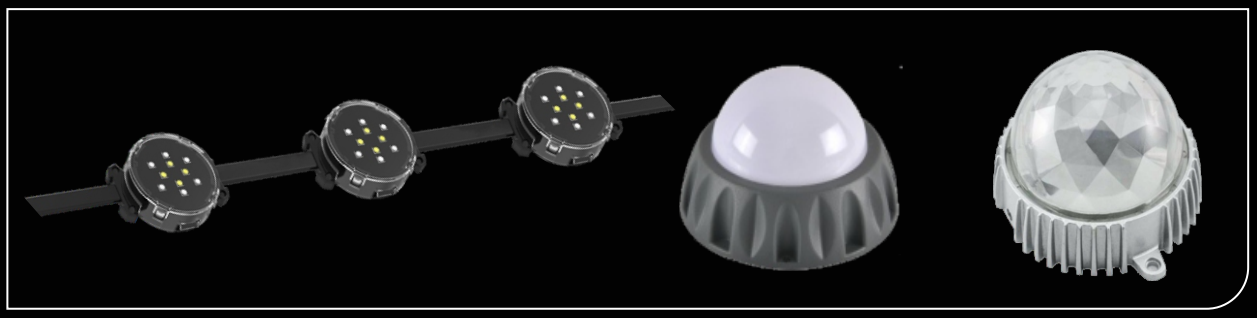

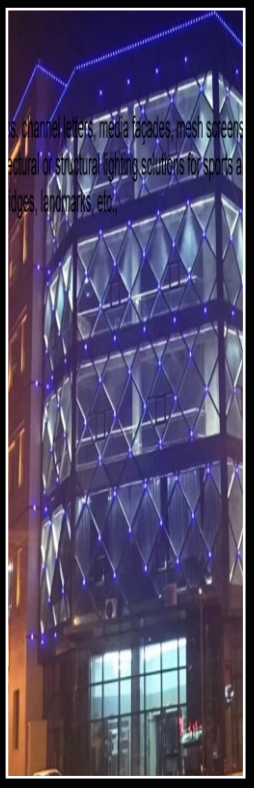

Product Features

- Die-casting housing with double powder coating.
- High quality diffuser.
- Excellent thermal management ensures long LED life
- Input voltage of 24Vdc.
- Wide rnage of light colours
- Anti reflection optical technology offers maximum visual comfort
- Reliable driving technology
- Reliable in all environmental conditions
- Different light distributions with minimum split on light edge
- Superior controller with more updated functions

Operating Voltage	24Vdc with shared Drivers
Power Consumption	0.75W to 12W
CRI	> 80
Material	PC/Aluminium + PC Diffuser
Pixel per Meter	As per requirement
Ambient Temperature	-20ºC ~ +50ºC
Life Time	50,000 Hours/L70 at 25ºC
Control System	Static/Dynamic(DMX or RDM)
IP Rating	IP67
IK Rating	IK08

RGB RGBW 2400K 2700K 3000K 4000K 5700K 6500K

Options/Accessories:

Aluminium Channel

Holder

NEON & LED STRIP LIGHTS

Product Features

- Silicon moulded flexible tubes with vertical and horizontal pending options.
- Strip Length can be customised as per requirements.
- Excellent thermal management ensures long LED life
- Ingress protection IP67
- Wide rnage of light colours
- Anti reflection optical technology offers maximum visual comfort
- Reliable driving technology
- Reliable in all environmental conditions
- Different light distributions with minimum split on light edge
- Superior controller with more updated functions

Operating Voltage	24Vdc with shared Drivers
Power Consumption	5W/mtr to 24W/mtr
CRI	> 80
Material	Silicon/PU
Dimesions	As per requirement
Pixel per Meter	As per requirement
Ambient Temperature	-20ºC ~ +50ºC
Life Time	50,000 Hours/L70 at 25ºC
Control System	Static/Dynamic(DMX or RDM)
IP Rating	IP65/IP67/IP68
IK Rating	IK06

RGB RGBW 2400K 2700K 3000K 4000K 5700K 6500K

Options/Accessories:

Silicon End Caps

Clamp

Aluminium Channel