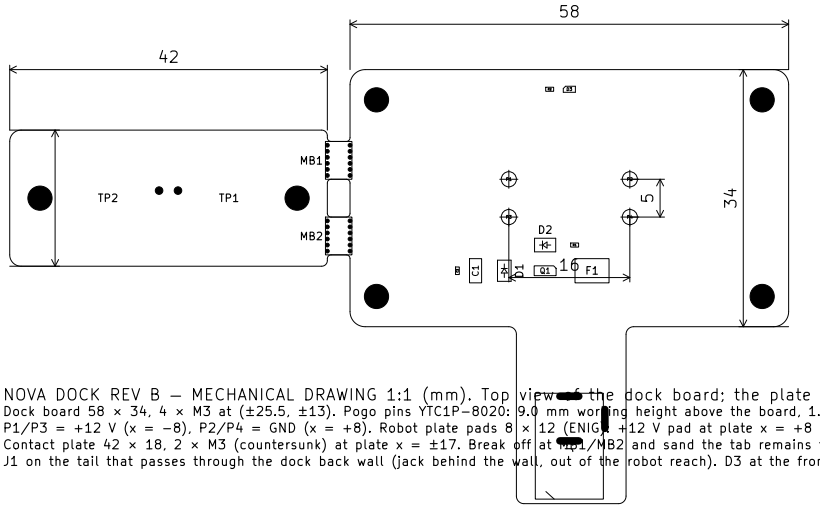


NOVA DOCK REV B — MECHANICAL DRAWING 1:1 (mm). Top view of the dock board; the plate (left) is mounted face down.
Dock board 58 × 34, 4 × M3 at (±25.5, ±13). Pogo pins YTC1P-8020: 9.0 mm working height above the board, 1.0 mm stroke, 100 g each.
P1/P3 = +12 V (x = −8), P2/P4 = GND (x = +8). Robot plate pads 8 × 12 (ENIG), +12 V pad at plate x = +8 because the plate is mounted face down (mirrored).
Contact plate 42 × 18, 2 × M3 (countersunk) at plate x = ±17. Break off at MB1/MB2 and sand the tab remains flush.
J1 on the tail that passes through the dock back wall (jack behind the wall, out of the robot reach). D3 at the front edge under a light pipe.

ronmart · Caril Ronnie Martínez Vera

Sheet:
File: nova-dock.kicad_pcb

Title: NOVA — Charging dock and robot contact plate

Size: A4	Date: 2026-10-28	**Rev: B**
KiCad E.D.A. 10.0.7		Id: 1/1