Application: Flex Plate Measurements

The Challenge


A customer needed to measure torque between the engine and transmission, on the flex plate, in order to determine loss distribution throughout a powertrain system. Torque has never been accurately measured at the flex plate before, due to both space constraints and the harsh environment.

System Requirements

- ✓ Compact: The system had to have both a small footprint and a low profile to be able to be packaged on a flex plate, in a vehicle.
- ✓ Withstand high temperatures: The system would be exposed to very high temperatures for prolonged periods of time, and needed to not only withstand this heat, but provide accurate data throughout the full temperature range.
- ✓ Custom Design: There was no off-the-shelf system that could be used for this specific application. Development required engineering expertise backed with excellent customer service.

The TECAT Solution

TECAT custom developed a telemetry system based on the WISER product that could be packaged along the perimeter of the flex plate. The TECAT team then conducted extensive testing, before delivering a system that would consistently provide accurate data, while withstanding the extreme temperatures.

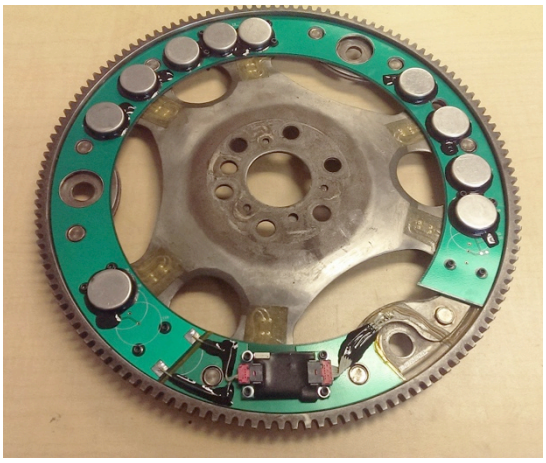

Custom WISER Installation on a Flex Plate

TECAT Performance Systems, LLC
775 Technology Drive | Suite 200 | Ann Arbor, MI 48108
Phone: 248.615.9862 | sales@tecatperformance.com