WISER
Remote Enclosures

Protect the WISER remote unit from damage due to debris with these custom built enclosures. The black base is available in three different sizes, to accomodate a wide range of shaft diameters. The same base is used for both the remote unit, which is housed in the red cover, and the Li-Poly battery, which is housed in the white cover. The base accomodates one or two hose clamps, to secure the units to the shaft under test. The enclosures are made of PA 2200, a plastic material designed for high impact strength.




Max RPM for Enclosure, Based on Shaft Diameter, for Operating Temperatures < 80°C		
Shaft Diameter	Max RPM with 2 hose clamp mounting	Max RPM with 1 hose clamp mounting
3/4” - 1 1/8” (19mm - 28.5mm)	15,000	12,000
1 1/8” - 2 3/8” (28.5mm - 60.3mm)	10,000	8,000
2 3/8” and Up (> 60.3mm)	See Note Below	

Note: For shafts greater than 2 3/8” in diameter, calculate the centrifugal force for a 27g mass located at the surface of the shaft. This force must be less than 250lb for an enclosure secured with 2 stainless steel hose clamps, and must be less than 150lb for an enclosure secured with 1 stainless steel hose clamp. For example, a 4” shaft would have an RPM limit of approximately 8,000RPM for a 2 hose clamp installation, and a 6,000RPM limit for a single hose clamp installation.

Dimensional Specifications		
Shaft Diameter	Height, H1	Height, H2
3/4” - 1 1/8” (19mm - 28.5mm)	0.73” (18.5mm)	0.52” (13.2mm)
1 1/8” - 2 3/8” (28.5mm - 60.3mm)	0.65” (16.5mm)	0.52” (13.2mm)
2 3/8” and Up (> 60.3mm)	0.59” (15.0mm)	0.54” (13.7mm)
Environmental Specifications		
Operating Temperature	-40° to 80°C	

NOTE: The enclosures are not watertight.

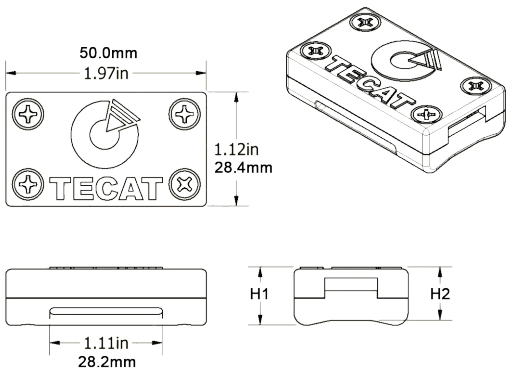

TECAT Performance Systems
775 Technology Drive Suite 200 | Ann Arbor, Michigan 48108 | USA | tecatperformance.com | P: 248.615.9862