

STANDARD ARRIVAL
CHART-INSTRUMENT

VAR3°E

D-ATIS 126.7
TWR 118.1(125.0)

ZWWW URUMQI/Diwopu
CDO RNAV RWY25


BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

APP01 120.25(119.9)
APP02 126.05(119.9)
APP03 123.8(119.9)
APP04 127.9(119.9)


- 1. RNAV 1
- 2. GNSS REQUIRED
- 3. RADAR REQUIRED

TL 3600
TA 3000
3300(QNH≥1031hPa)
2700(QNH≤979hPa)

Only used for CDO




NOT TO SCALE


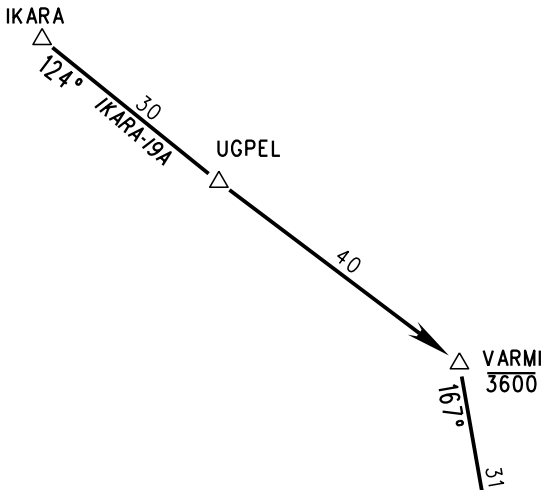


- Notes:
- 1. Using this chart need ATC permission.
 - 2. CDO terminated once ATC give heading instructions.

IAF
WW610
1800
MAX390km/h

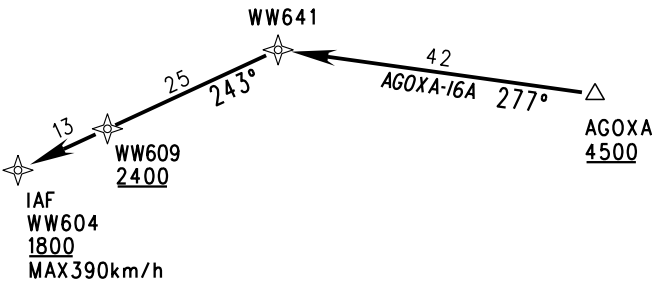

URUMQI
115.3 WUR
CH 100X
N43 54.8E087 30.5



Changes: New chart.