



VARO.5° W

RWY	Direction	Bearing strength(PCN)						
05	045°	RWY(From south to north: 0-400m).TWYA.B.C.F.G.H.M.N:PCN 62/R/B/W/T RWY(From south to north: 400-2600m).TWY E:PCN 61/F/B/W/T						
23	225°	TWY D:PCN 51/R/B/W/T						



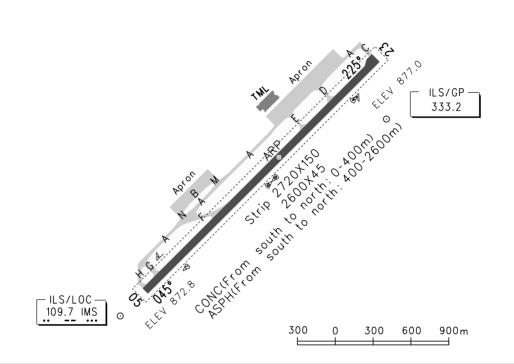

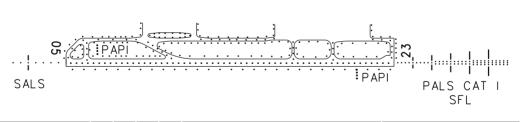

T	AKE	-OFF MINIM	A(WITH RELIA	LIGHTS			
ACFT Typ		RWY05		RWY23		RWY05	RWY23
7.0		REDL	NIL(Day only)	REDL	NIL(Day only)	144103	KW125
	A B C D	RVR400 VIS800	RVR500 VIS800	RVR400 VIS800	RVR500 VIS800	SALS PAPI REDL	PALS CAT I SFL PAPI
Other 1&2 ENG VIS1600						RCLL	REDL
Note:							RCLL
Changes: D-ATI	s						_