


STANDARD DEPARTURE
CHART-INSTRUMENT

VAR1° W

ZPPP KUNMING/Changshui
RNAV RWY04(NODIB)

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM


D-ATIS 126.275	TWR(E) 118.1(118.85)
APP01 119.0(125.55) APP02 123.8(125.55) APP03 120.35(127.9) APP04 121.15(126.55) APP05 124.25(127.9) APP07 119.225	TL 6000 TA 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)



NOT TO SCALE

RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED	or RNP1 GNSS
---	--------------------

- Notes:
- 1. Under radar control service, actual ALT by ATC.
 - 2. Departure turning is forbidden before DER.

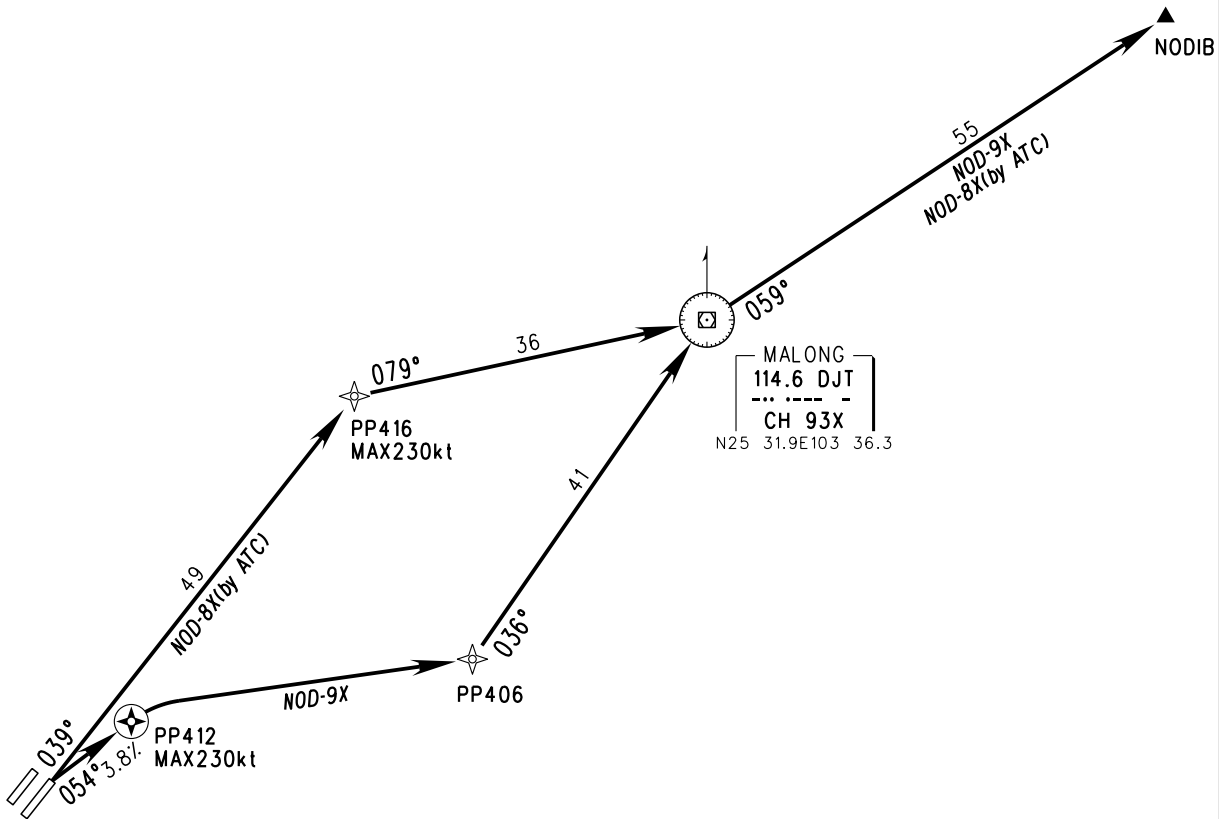

SID	Routing
NOD-8X (by ATC)	PP416-DJT-NODIB
NOD-9X	DER-PP412-PP406-DJT-NODIB

Changes: New chart.