APN01 121.9(121.8/121.65) APN02 121.8(121.9/121.65) APN03 121.65(121.8/121.9) Delivery 121.6(121.7)(DCL AVBL) GND 121.85(121.7) for RWY02L/20R 121.75(121.7) for RWY02R/20L

ARP

3600X45 CONC

ZUUU CHENGDU/Shuangliu

Bearing strength (PCN)

86/R/B/W/T (Stands Nr.357,357L/R,358,359)

85/R/B/W/T (Stands Nr.130-132,134,135,146,147,149,150,161,162,

164-166,176,231-239,301-319,313L/R,314L/R,315L/R,316L/R,

317L/R,318L/R,319L/R,326,326L/R,420-422,501-507,

505L/R,506L/R,507L/R,701-711)

83/R/B/W/T (Stands Nr.360-365,362L/R,364L/R)

67/R/B/W/T (Stands Nr.136-145,151-160,167-175,177,320-324,327-343,

345-356,401-410,423-426,601-619)

62/R/B/W/T (Stands Nr.101-129.201-219.229.230)

56/R/B/W/T (Stands Nr.224-228)




Note:

1. HP1-HP7,HP10-HP15

are reporting positions on request. HP8,HP9 are

compulsory reporting positions.

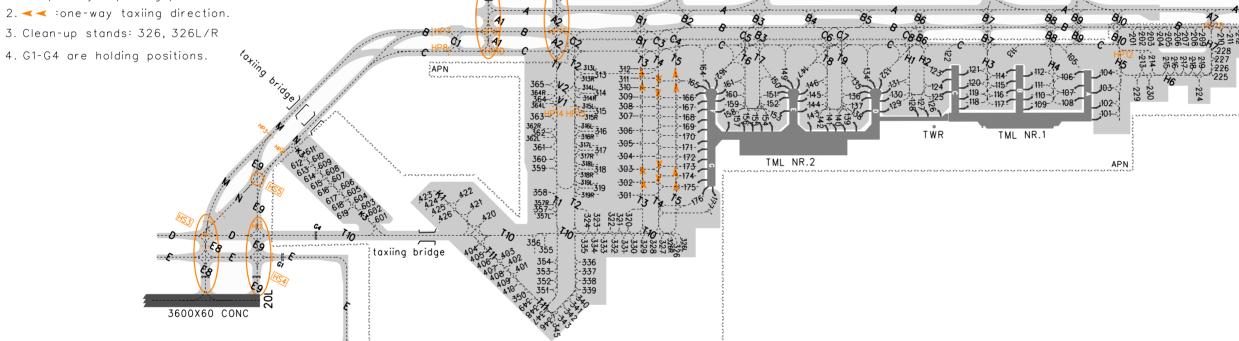

Changes: APN FREQ.

APN