



AERODROME CHART

TWR 118.5(130.0)

ZSYW YIWU/Yiwu
N29° 20.6'E120° 02.0' ELEV 83.1m

RWY	Direction	Bearing strength(PCN)
02	024°	RWY: 71/R/A/W/T PCN 66/R/A/W/T: A3, A4, A5, A6 (75m outwards RCL), A8 PCN 65/R/A/W/T: A PCN 97/F/B/X/T: A3, A4, A5, A6 (0-75m FM RCL)
20	204°	PCN 70/R/B/W/T : Stands Nr.1-2 PCN 55/R/B/W/T : Stands Nr.3-8 PCN 66/R/B/W/T : Stands Nr.9-11

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

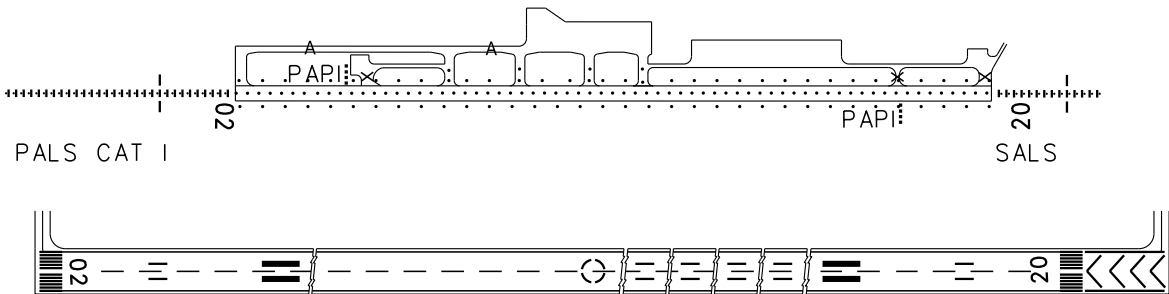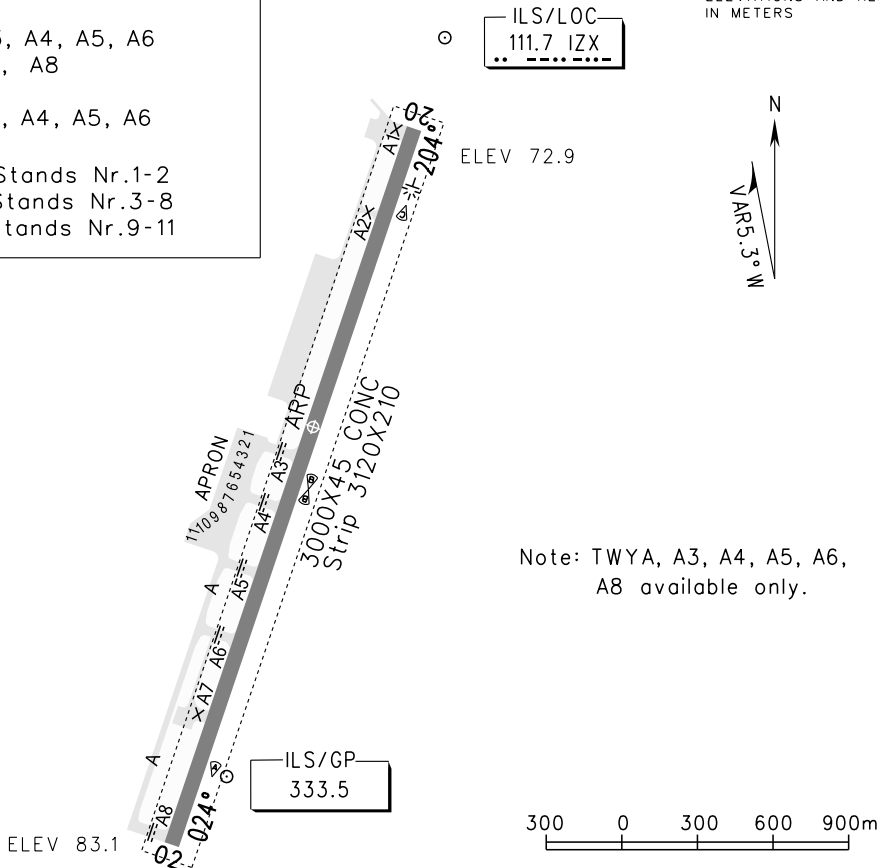

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY02		RWY20		RWY02	RWY20
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR500 VIS800		RVR500 VIS800		PALS CAT I SFL PAPI REDL RCLL RENL	SALS SFL PAPI REDL RCLL RENL
	B						
	C						
	D						
Other 1&2 ENG							
Note:							
Changes: TWR FREQ.							