

# STANDARD ARRIVAL CHART-INSTRUMENT

VAR 7° W

D-ATIS 126.65  
APP01 123.85(127.95)  
APP02 119.6(127.95)  
APP03 121.05(127.95)  
TWR 118.25(118.85)

ZYTL DALIAN/Zhoushuizi

RNAV RWY10

BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS  
DME DISTANCES IN  
NAUTICAL MILES  
DISTANCES IN KM


1. RADAR REQUIRED
2. RNAV 1
3. GNSS REQUIRED

TL 3600  
TA 3000  
3300(QNH ≥ 1031hPa)  
2700(QNH ≤ 979hPa)





CHANGHAI  
116.8 CHI  
CH 115X  
N39 16.0E122 37.0

When aircraft ALT is 3000m or below,  
MAX IAS 250kt .

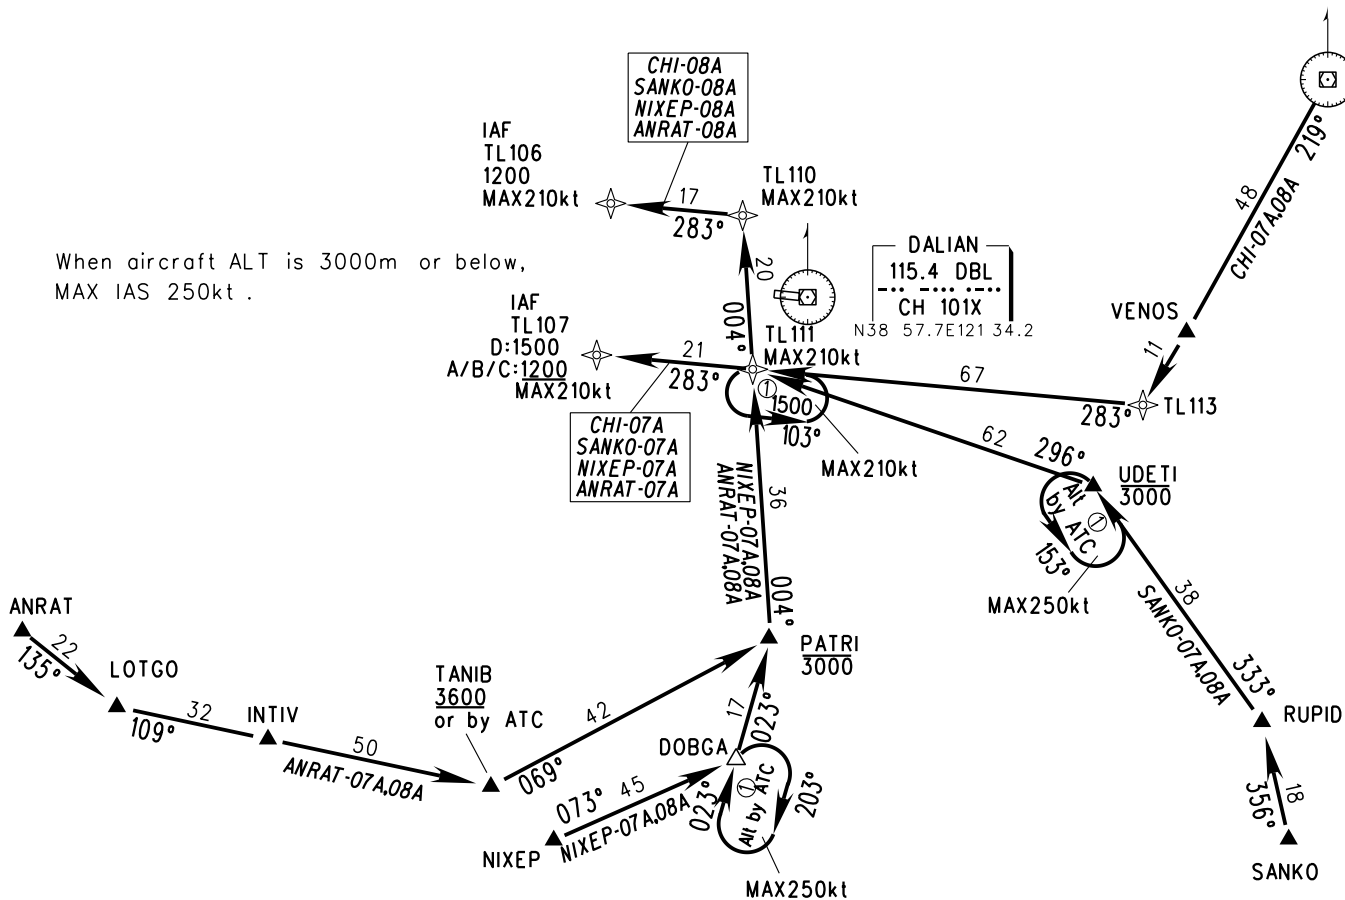

STAR	ROUTING
CHI-07A	CHI-VENOS-TL113-TL111-TL107
CHI-08A	CHI-VENOS-TL113-TL111-TL110-TL106
SANKO-07A	SANKO-RUPID-UDETI-TL111-TL107
SANKO-08A	SANKO-RUPID-UDETI-TL111-TL110-TL106
NIXEP-07A	NIXEP-DOBGA-PATRI-TL111-TL107
NIXEP-08A	NIXEP-DOBGA-PATRI-TL111-TL110-TL106
ANRAT-07A	ANRAT-LOTGO-INTIV-TANIB-PATRI-TL111-TL107
ANRAT-08A	ANRAT-LOTGO-INTIV-TANIB-PATRI-TL111-TL110-TL106

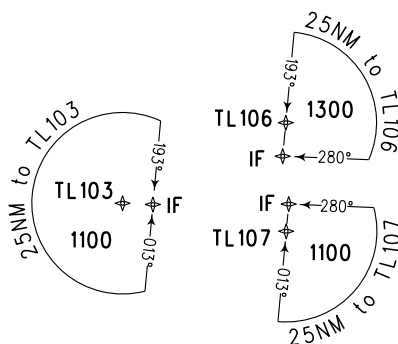

Changes: Add APP03 FREQ.