

# STANDARD ARRIVAL CHART-INSTRUMENT


VAR9° W

D-ATIS 126.25  
TWR 118.85(124.35)  
APP01 119.45(127.9)  
APP02 125.25(127.9)

ZYCC CHANGCHUN/Longjiao  
RNAV RWY06(DUKIR/BUTET)

BEARINGS ARE MAGNETIC.  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS.  
DME DISTANCES IN  
NAUTICAL MILES.  
DISTANCES IN KM.


TL 3600  
TA 3000  
3300(QNH ≥ 1031hPa)  
2700(QNH ≤ 979hPa)




RNAV1  
GNSS, RADAR REQUIRED

## Note:

1. When aircraft ALT is 3000m(QNH) or below, MAX IAS is 250kt;
2. BUTET-71A shall be used for CDO procedure with ATC approval, and the CDO operation time 1400-2200; CDO terminated once ATC give heading instructions;
3. Holding at CC513 shall be used by ATC.

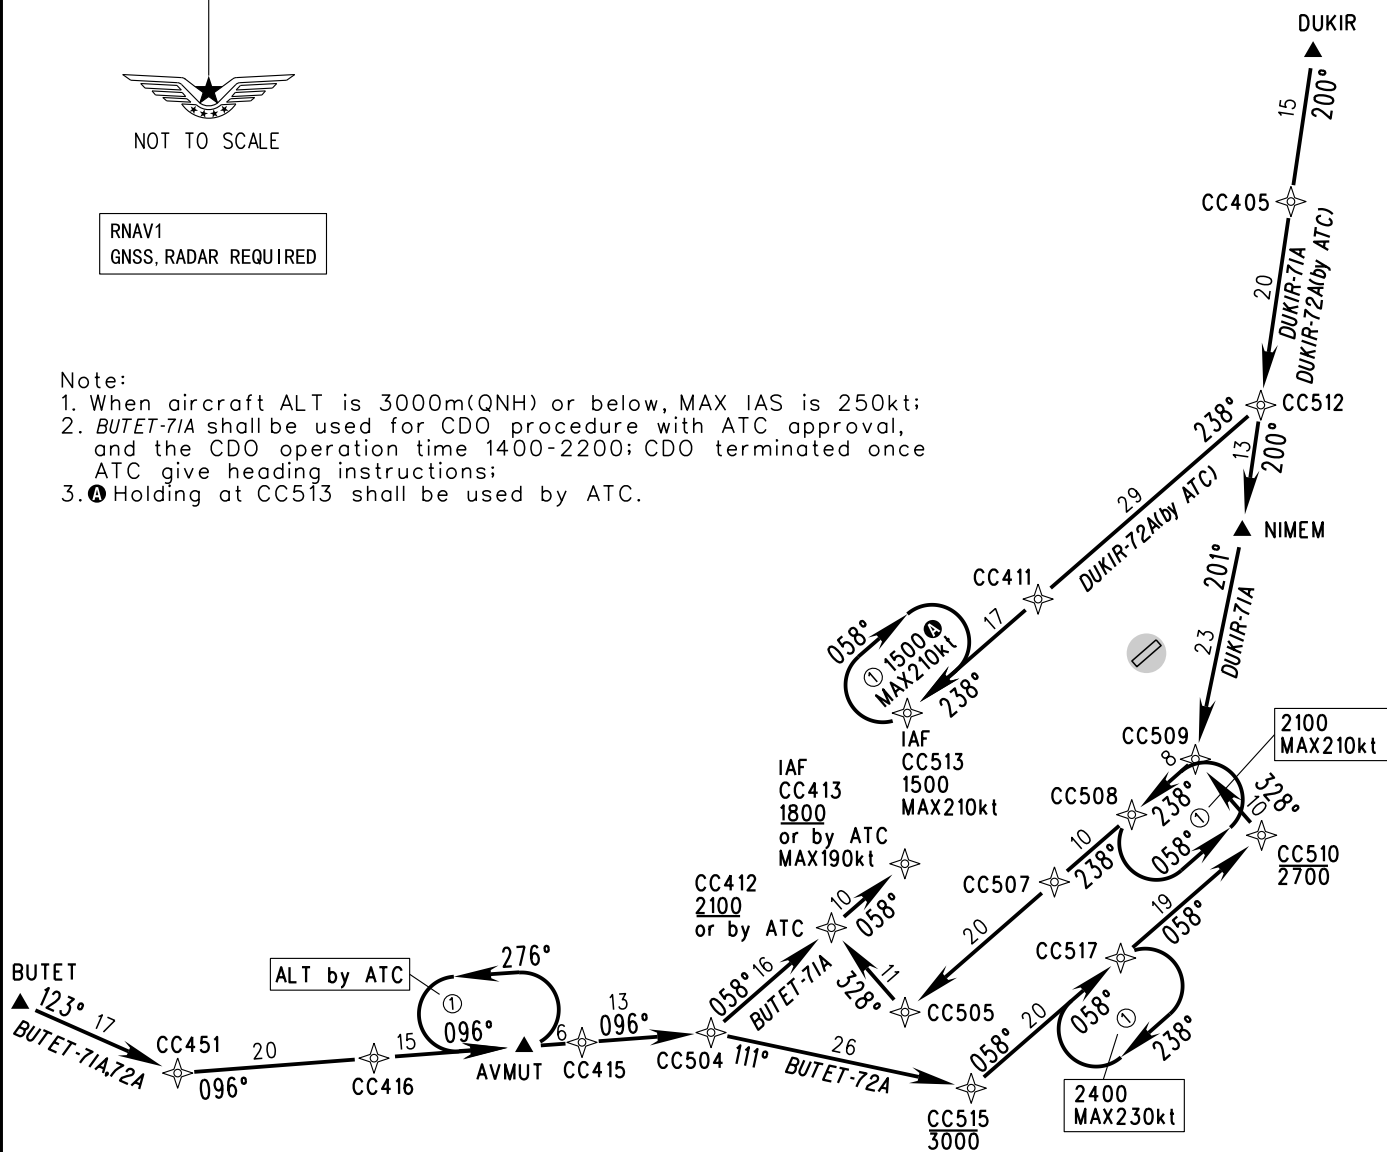

STAR	ROUTING
DUKIR-71A	DUKIR-CC405-CC512-NIMEM-CC509-CC508-CC507-CC505-CC412-CC413
DUKIR-72A (by ATC)	DUKIR-CC405-CC512-CC411-CC513
BUTET-71A	BUTET-CC451-CC416-AVMUT-CC415-CC504-CC412-CC413
BUTET-72A	BUTET-CC451-CC416-AVMUT-CC415-CC504-CC515-CC517-CC510-CC509-CC508-CC507-CC505-CC412-CC413



Changes: New chart.