

STANDARD ARRIVAL
CHART-INSTRUMENT

ZPPP KUNMING/Changshui
RNAV RWY03/04(LXI)

VAR1° W

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM


D-ATIS 128.45	TWR(E) 118.1(118.85) TWR(W) 130.6(118.85)
APP01 119.0(125.55) APP02 123.8(125.55) APP03 120.35(127.9) APP04 121.15(126.55) APP05 124.25(127.9) APP07 119.225	TL 6000 TA 5400 5700(QNH ≥1031hPa) 5100(QNH ≤979hPa)

- Note:
- 1. ALT 4200m and below, MAX IAS 205kt.
 - 2. Under radar control service, actual ALT by ATC.



RNAV1
GNSS
or DME/DME/IRU
RADAR REQUIRED

or
RNP1
GNSS

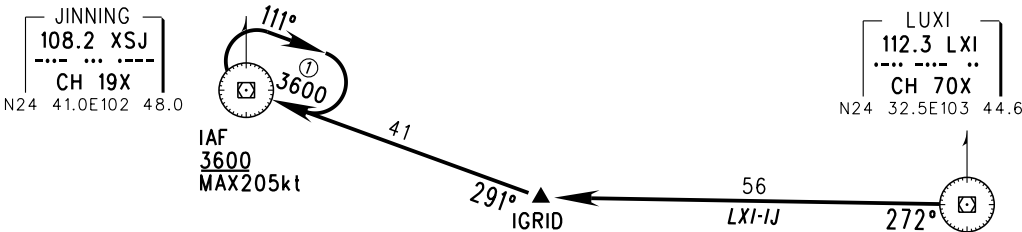

STAR	Routing
LXI-IJ	LXI-IGRID-XSJ

Changes: Navigation mode.

