



AERODROME CHART

ATIS 126.45
TWR 118.15(118.85)
GND 121.7(DCL AVBL)
APN 121.6

ZJSY SANYA/Phoenix

N18° 18.1'E109° 24.8' ELEV 28.5m

RWY	Direction	Bearing strength(PCN)		Bearing strength(PCN)	
08	083°	TWY C:	86/R/B/W/T	TWY B8.B9, Stands Nr.107.108.	
		RWY(0-500m inward THR08),		502-506.509-511.513:	79/R/B/W/T
		Stands Nr.302.310.317:	85/R/B/W/T	RWY(other part)	
		RWY(0-500m inward THR26),		TWY A.A7.B6, Stands Nr.102.103.	
26	263°	Stands Nr.301.303.304.306-309.		105.106.109-112.114-116.118.501:	78/R/B/W/T
		311-316.318-320.902:	84/R/B/W/T	TWY A5.D, Stands Nr.104.113:	77/R/B/W/T
		TWY B2-B5, Stands Nr.305.601.		TWY A2.A3, Stand Nr.101:	76/R/B/W/T
		611.905:	83/R/B/W/T	Stand Nr.117:	75/R/B/W/T
		TWY A6.B(E of TWY A1).		TWY A1(S of TWY B):	74/R/B/W/T
		Stands Nr.602-605.607-610.		TWY A1(N of TWY B):	68/R/B/W/T
		901.903.903L/R.904.906-909:	82/R/B/W/T	TWY B(W of TWY A1).B1.E.	
		Stands Nr.606:	81/R/B/W/T	Stands Nr.201-212:	67/R/B/W/T
		TWY A4.B7, Stands Nr.507.			
		508.512:	80/R/B/W/T		

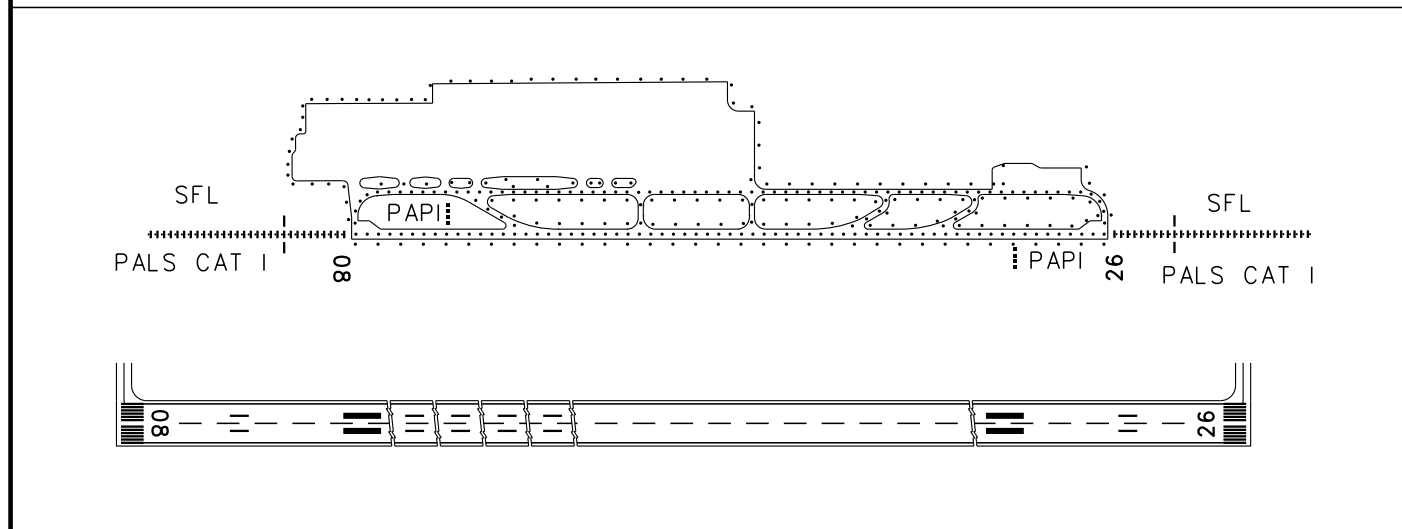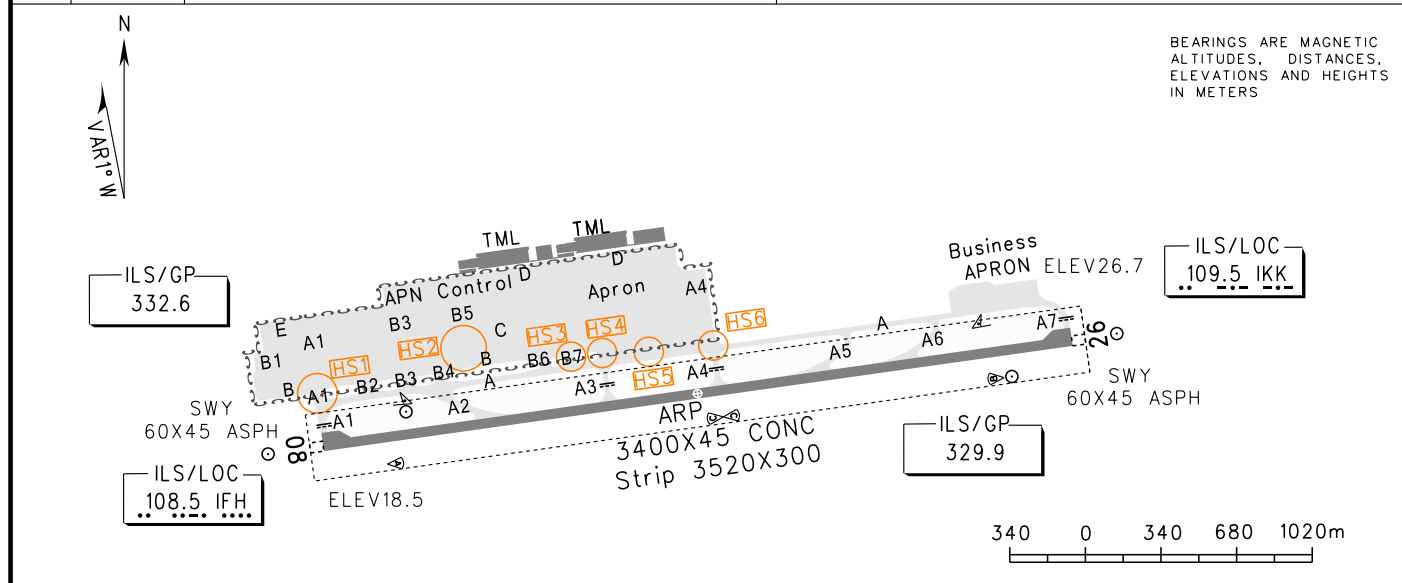

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY08		RWY26		RWY08	RWY26
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR400 VIS800	RVR500 VIS800	CEILING300 VIS5000		PALS CAT I SFL PAPI REDL RCLL RENL	PALS CAT I SFL PAPI REDL RCLL RENL
	B						
	C						
	D						
Other 1&2 ENG		VIS1600					
Note:							
Changes: PCN of RWY,TWY and Stands.							