

STANDARD DEPARTURE CHART-INSTRUMENT

D-ATIS 127.45(DEP)
TWR 130.35(118.05)(E)
VAR2° W 118.45(130.35)(W)




ZGSZ SHENZHEN/Baoan
RNAV RWY15

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

Zhuhai APP01 120.35(125.525)
APP02 119.55(119.775)
APP03 123.85(119.775)
APP04 119.025(125.525)
APP05 127.95(119.775)

1. RNAV 1
2. GNSS or DME/DME/IRU REQUIRED
3. RADAR REQUIRED

TL 3600(QNH <980hPa)
3300(QNH ≥980hPa)
TA 2700

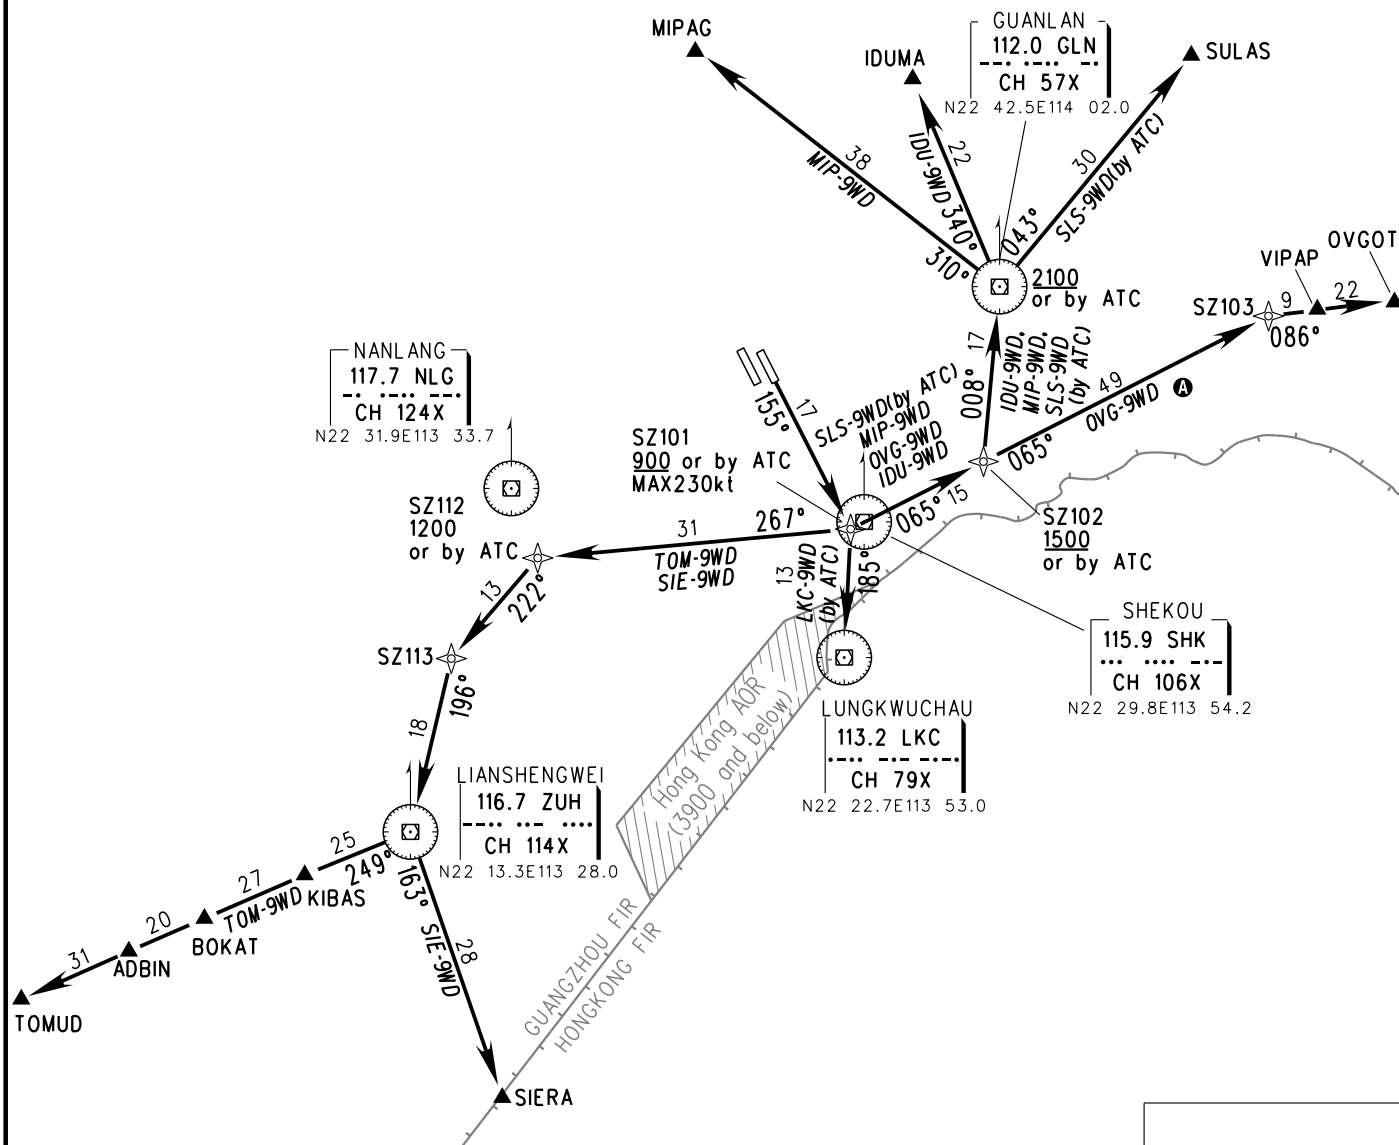

- Note:** 1. Deviation to south of R065°SHK is forbidden for OVG-9WD, IDU-9WD, SLS-9WD, MIP-9WD.
2. When two RWYs used for independent departure, TOM-9WD, SIE-9WD need ATC clearance.
3. Ⓐ Deviation to south is forbidden.

Changes: APP frequency.

