

STANDARD ARRIVAL CHART-INSTRUMENT

VAR 7° W

D-ATIS 126.65
APP01 123.85(127.95)
APP02 119.6(127.95)
APP03 121.05(127.95)
TWR 118.25(118.85)

ZYTL DALIAN/Zhoushuizi

RNAV RWY28

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

1. RADAR REQUIRED
2. RNAV 1
3. GNSS REQUIRED

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)




NOT TO SCALE



When aircraft ALT is 3000m or below
MAX IAS is 250kt.

CHANGHAI
116.8 CHI
CH 115X
N39 16.0E122 37.0

DALIAN
115.4 DBL
CH 101X
N38 57.7E121 34.2

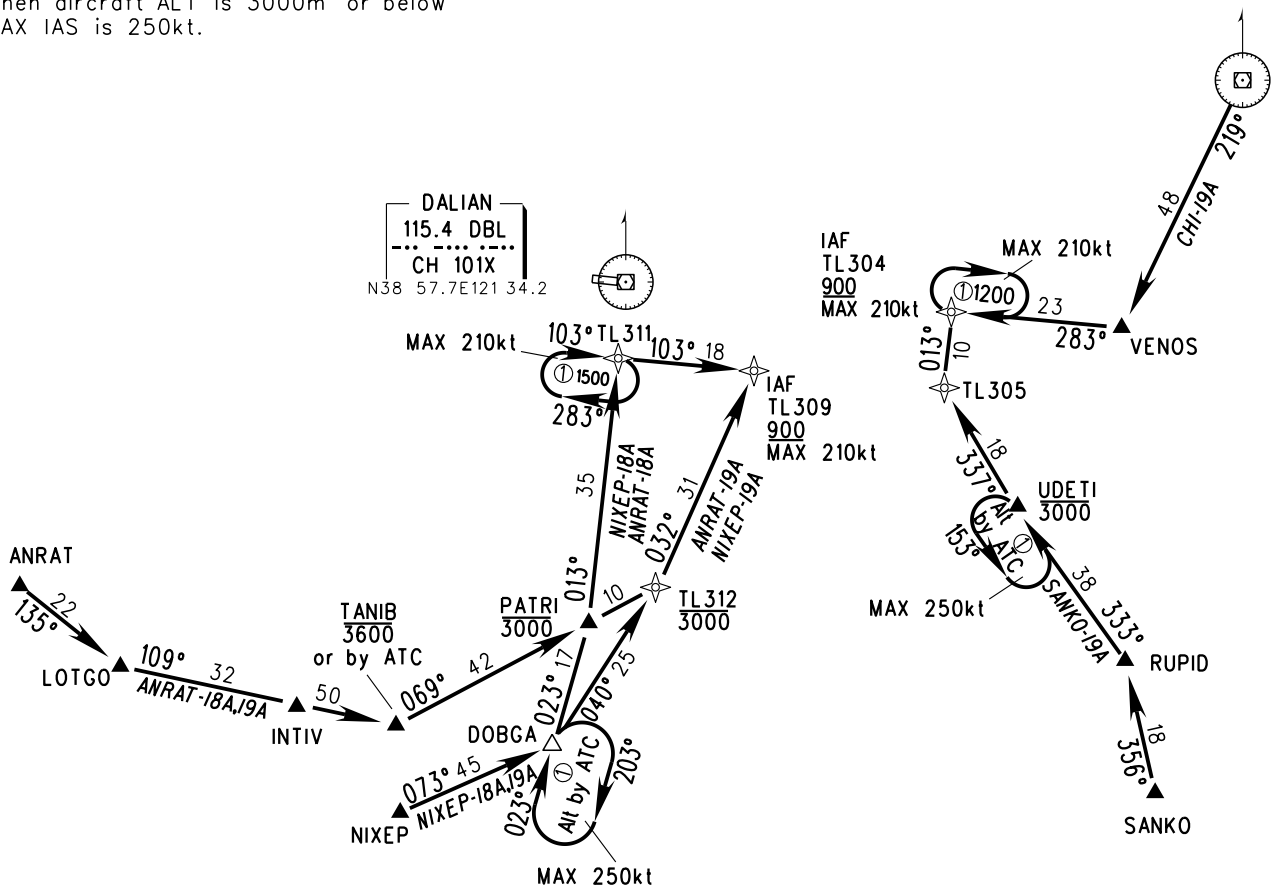

STAR	ROUTING
CHI-19A	CHI-VENOS-TL 304
SANKO-19A	SANKO-RUPID-UDETI-TL 305-TL 304
NIXEP-18A	NIXEP-DOBGA-PATRI-TL 311-TL 309
NIXEP-19A	NIXEP-DOBGA-TL 312-TL 309
ANRAT-18A	ANRAT-LOTGO-INTIV-TANIB-PATRI-TL 311-TL 309
ANRAT-19A	ANRAT-LOTGO-INTIV-TANIB-PATRI-TL 312-TL 309

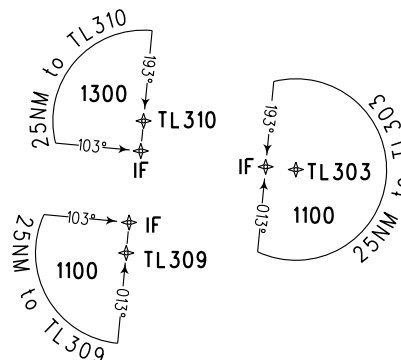

Changes: Add APP03 FREQ.