

STANDARD DEPARTURE
CHART-INSTRUMENT

D-ATIS 126.25
TWR 118.85(124.35)
APP01 119.45(127.9)
APP02 125.25(127.9)
VAR9° W

ZYCC CHANGCHUN/Longjiao
RNAV RWY06(ISLUK/BUTET)


BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)



- Note:
1. When aircraft ALT is 3000m(QNH) or below,
MAX IAS is 250kt;
 2. BUTET-71D/72D shall be used for CCO procedure
with ATC approval, and the CCO operation time
1400-2200;
CCO terminated once ATC give heading instructions.

RNAV1
GNSS, RADAR REQUIRED

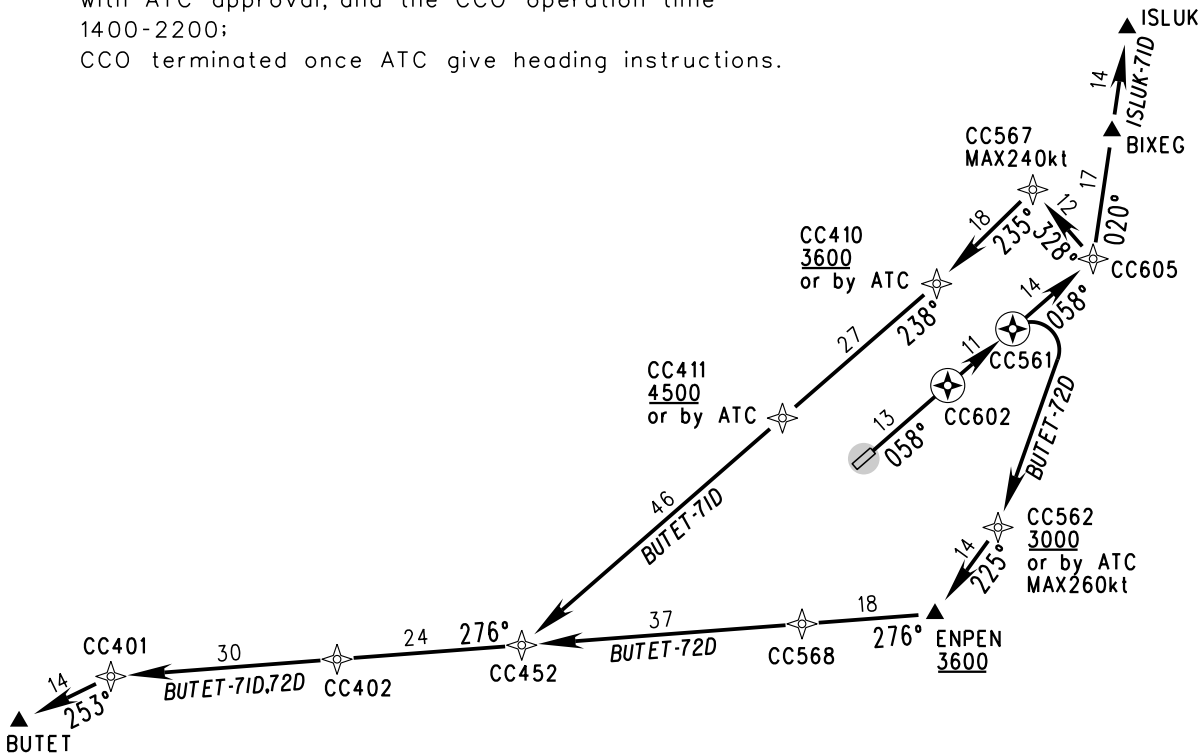

SID	ROUTING
ISLUK-71D	CC605-BIXEG-ISLUK
BUTET-71D	CC602-CC561-CC605-CC567-CC410-CC411-CC452-CC402-CC401-BUTET
BUTET-72D	CC602-CC561-CC562-ENPEN-CC568-CC452-CC402-CC401-BUTET

Changes: New chart.