


STANDARD ARRIVAL
CHART - INSTRUMENT

ZPPP KUNMING/Changshui
RNAV RWY03/04(MEBNA)

VAR1° W

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM




NOT TO SCALE

RNAV1
GNSS
or DME/DME/IRU
RADAR REQUIRED

or
RNP1
GNSS

| | |
|---|---|
| D-ATIS 128.45 | TWR(E) 118.1(118.85) TWR(W) 130.6(118.85) |
| APP01 119.0(125.55) APP02 123.8(125.55) APP03 120.35(127.9) APP04 121.15(126.55) APP05 124.25(127.9) APP07 119.225 | TL 6000 TA 5400 5700(QNH ≥1031hPa) 5100(QNH ≤979hPa) |

- Note:
- 1. ALT 4200m and below, MAX IAS 205kt.
 - 2. Under radar control service, actual ALT by ATC.

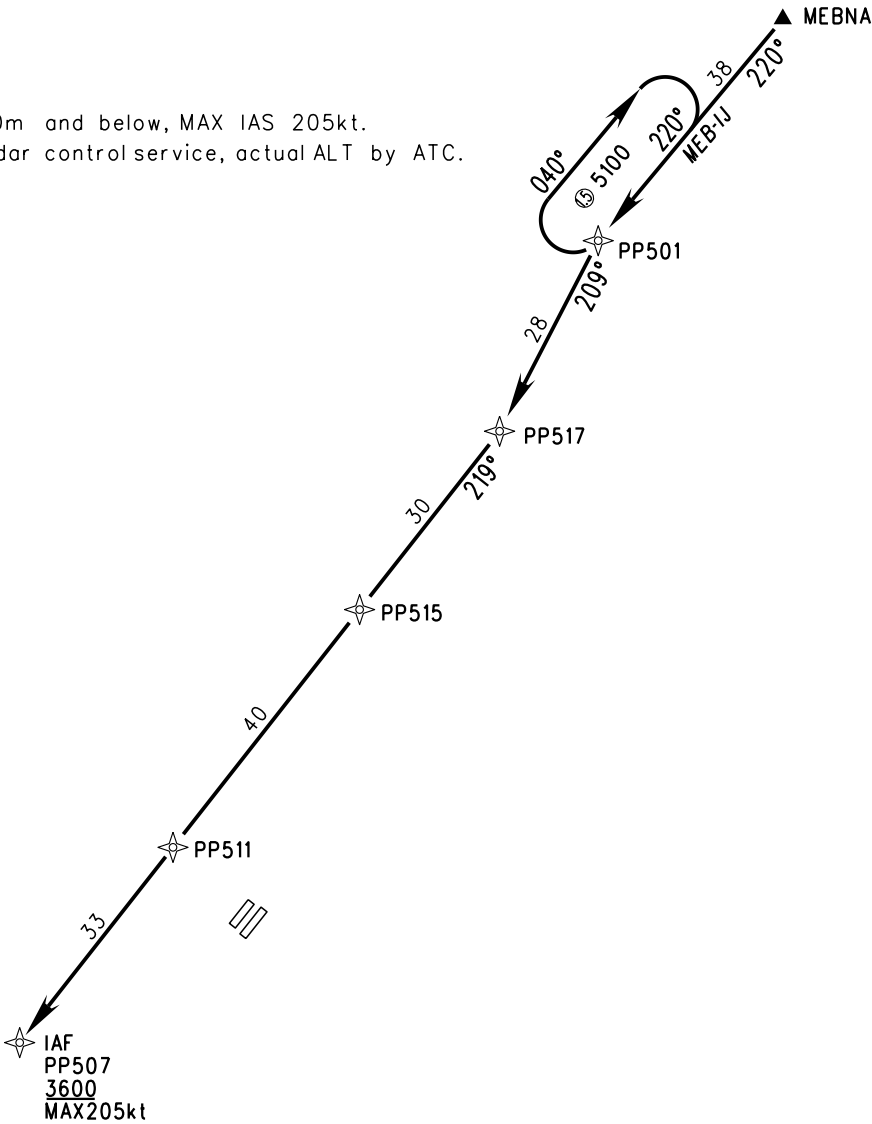

| STAR | Routing |
|--------|-------------------------------------|
| MEB-1J | MEBNA-PP501-PP517-PP515-PP511-PP507 |

Changes: Navigation mode.