

# STANDARD DEPARTURE CHART-INSTRUMENT

D-ATIS 127.45(DEP)  
TWR 130.35(118.05)(E)  
VAR2° W 118.45(130.35)(W)


ZGSZ SHENZHEN/Baoan  
RNAV RWY16

BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS  
DME DISTANCES IN  
NAUTICAL MILES  
DISTANCES IN KM


Zhuhai APP01 120.35(125.525)  
APP02 119.55(119.775)  
APP03 123.85(119.775)  
APP04 119.025(125.525)  
APP05 127.95(119.775)

1. RNAV 1  
2. GNSS or DME/DME/IRU REQUIRED  
3. RADAR REQUIRED

TL 3600(QNH <980hPa)  
3300(QNH ≥980hPa)  
TA 2700



SHILONG  
115.7 SHL  
CH 104X  
N23 05.5E113 51.0

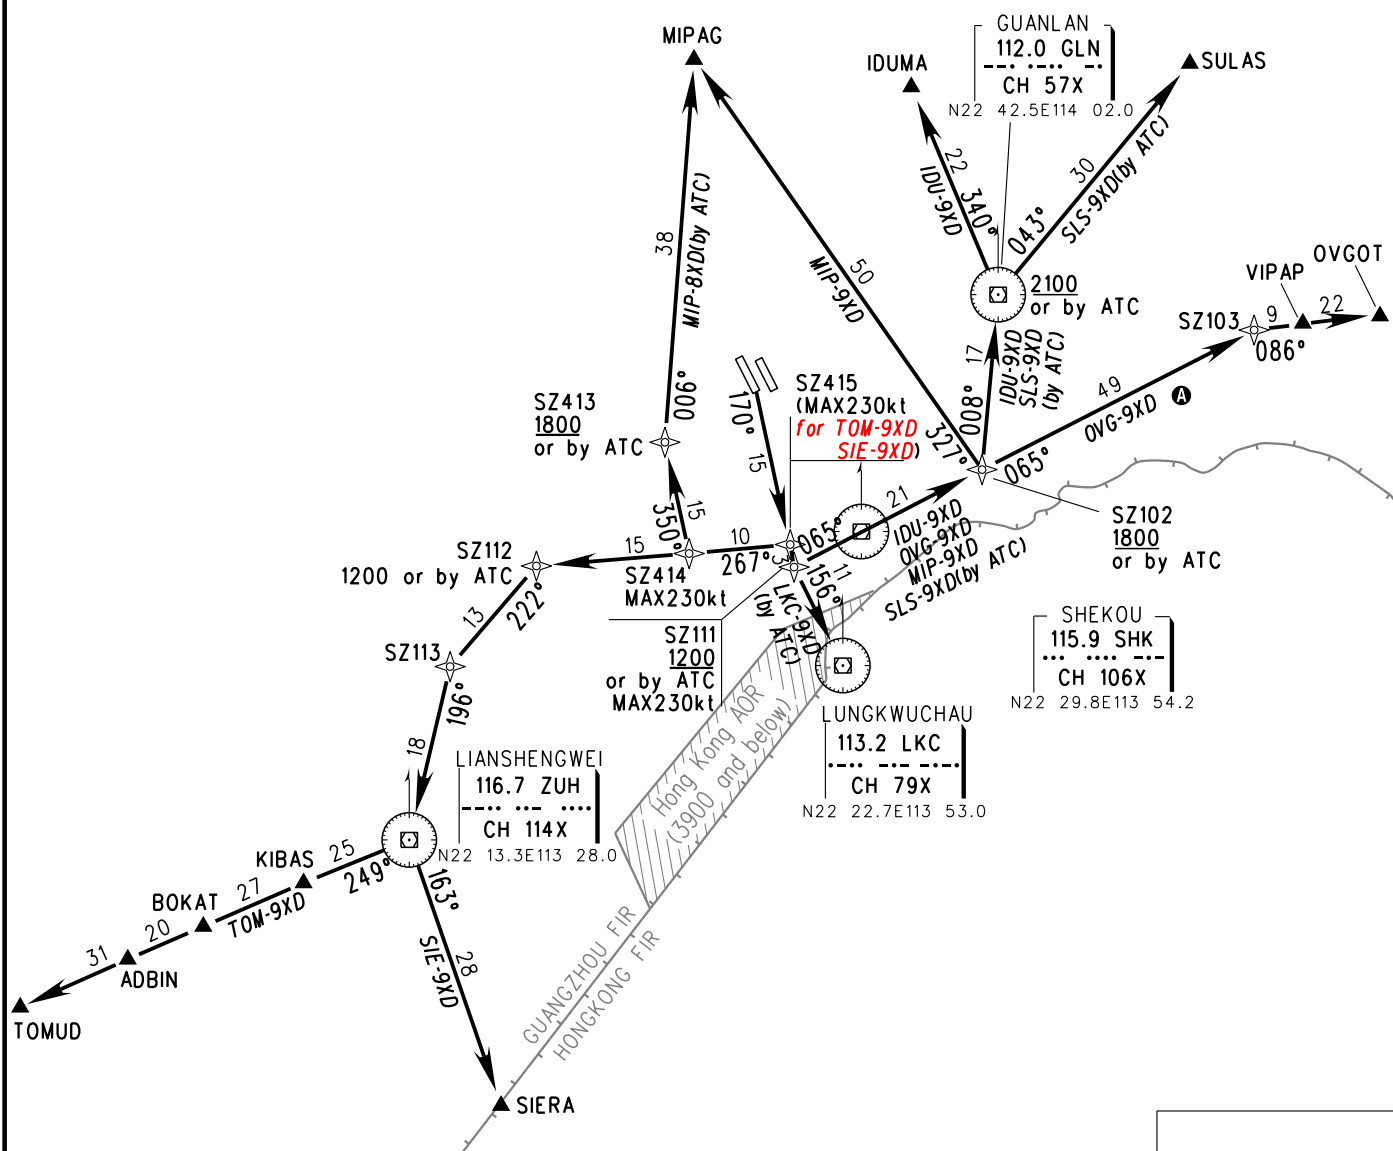

- Note:**
1. Deviation to south of R065° SHK is forbidden for OVG-9XD, IDU-9XD, MIP-9XD, SLS-9XD.
  2. When two RWYs used for independent departure, OVG-9XD, SLS-9XD, IDU-9XD, MIP-9XD need ATC clearance.
  3. Turning is forbidden until DER.
  4. Ⓐ Deviation to south is forbidden.

Changes: APP frequency, speed limit for SZ415.

