


AERODROME CHART

TWR 118.5(130.0)

ZWSH KASHI/Kashi
N39° 32.7'E076° 01.3' ELEV 1380.5m

RWY	Direction	Bearing strength (PCN)
08	083°	PCN 74/R/A/W/T: RWY, TWYs
26	263°	



BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM

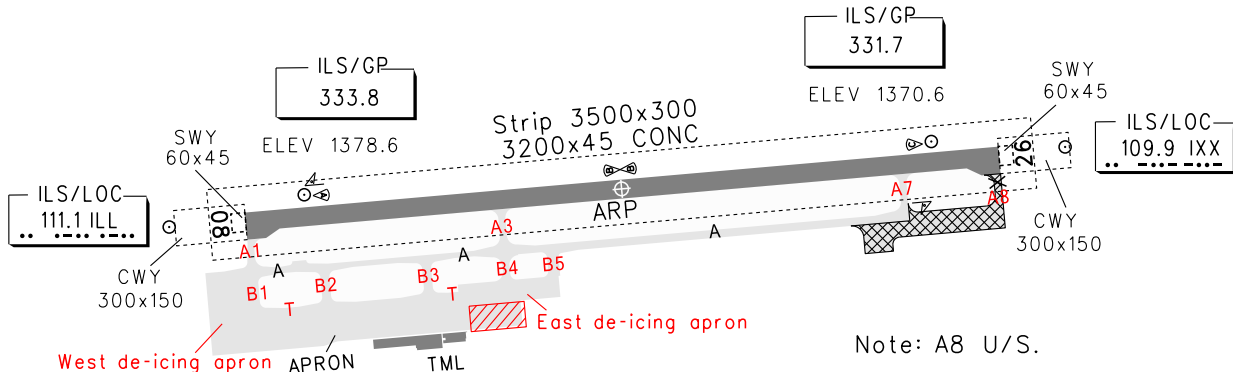

Note: A8 U/S.

 : U/S

 : Construction area

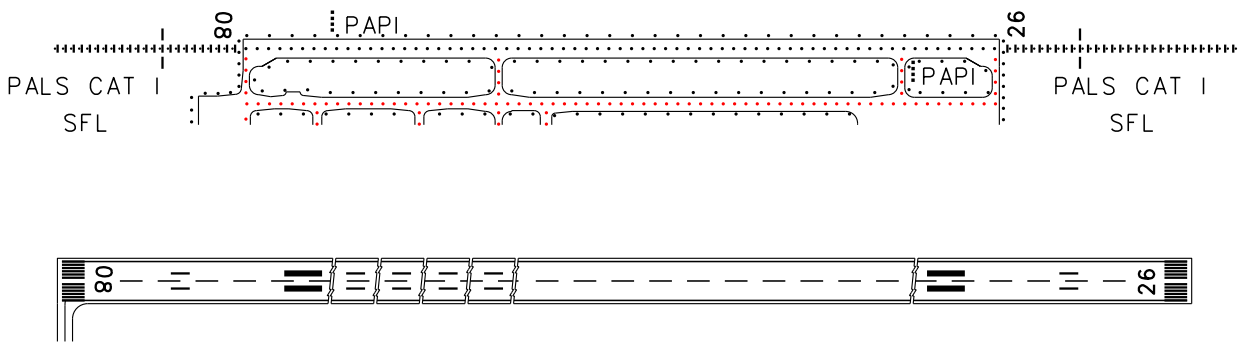

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)						LIGHTS	
ACFT Type		RWY08		RWY26		RWY08	RWY26
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A					PALS CAT I SFL PAPI REDL RCLL RENL	PALS CAT I SFL PAPI REDL RCLL RENL
	B	RVR400	RVR500	RVR400	RVR500		
	C	VIS800	VIS800	VIS800	VIS800		
	D						
Other 1&2 ENG							
Note: RVR/VIS 1600m and ceiling≥100m for one engine aircraft.							

Changes: Apron, TWYs, construction area, TWY center line light.