

STANDARD DEPARTURE
CHART-INSTRUMENT

VAR 7° W

D-ATIS 126.65
APP01 123.85(127.95)
APP02 119.6(127.95)
APP03 121.05(127.95)
TWR 118.25(118.85)

ZYTL DALIAN/Zhoushuizi
RNAV RWY10(KARPI,SANKO)

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM


1. RADAR REQUIRED
2. RNAV 1
3. GNSS REQUIRED

TL 3600
TA 3000
3300(QNH ≥ 10.31hPa)
2700(QNH ≤ 9.79hPa)




NOT TO SCALE

TL202: MAX IAS 230kt (For SANKO-09D, KARPI-08D,09D)

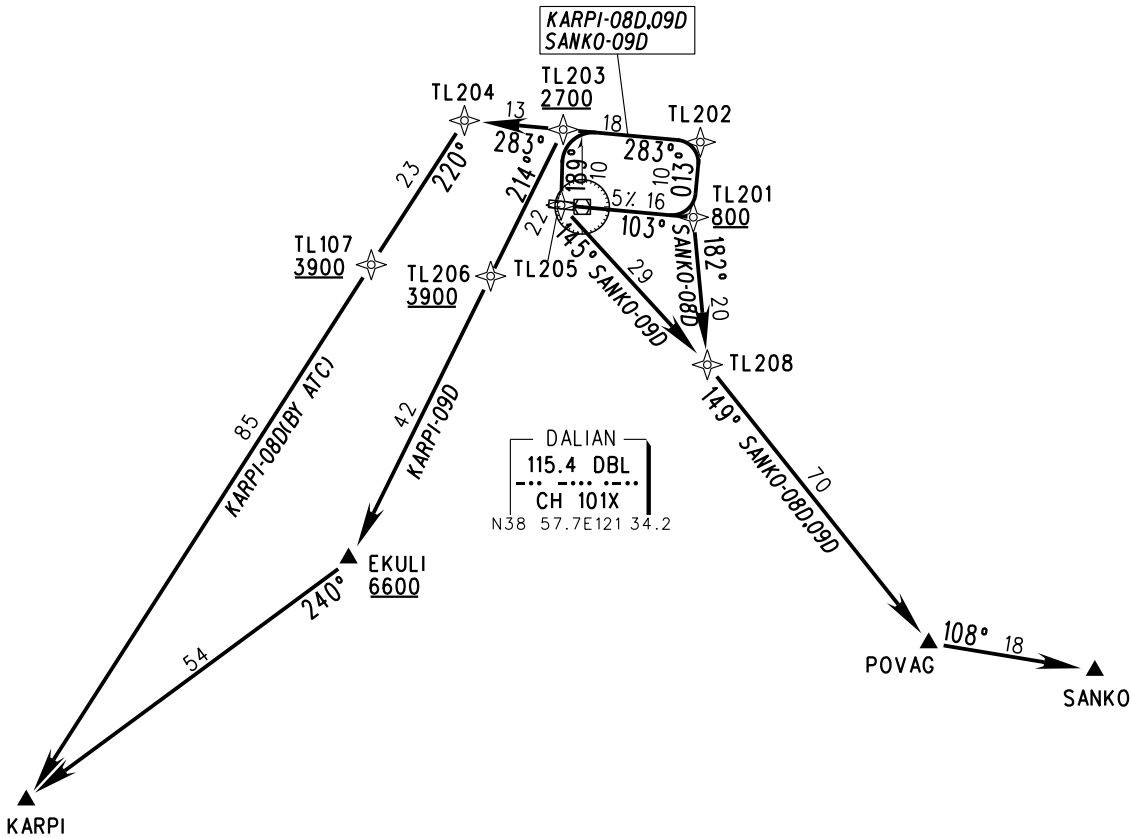

| SID | ROUTING | SID | ROUTING |
|-----------|---|-----------|-------------------------------------|
| SANKO-08D | TL201-TL208-POVAG-SANKO | KARPI-08D | TL201-TL202-TL203-TL204-TL107-KARPI |
| SANKO-09D | TL201-TL202-TL203-TL205-TL208-POVAG-SANKO | KARPI-09D | TL201-TL202-TL203-TL206-EKULI-KARPI |



MSA 46km

Note: 1.A close-in obstacle:1959m on 098° of ARP, altitude 46.5m.
2.When aircraft ALT is 3000m or below, MAX IAS is 250kt .

Changes: Add APP03 FREQ.