

lecture 13

home automation

pc.0 led
PC.1 M1
PC.2 M2
PB led

PD.0 rx
PD.1 tx

P led on
Q led off
C M clock
A M anti clock
S stop all


AC wireless

PB LCD
PC.0 LED green
PC.1 LED blue

inc I
dec D
start S
stop T

NORMAL
Temp: 27°C | - | + |

HC05 - Bluetooth module

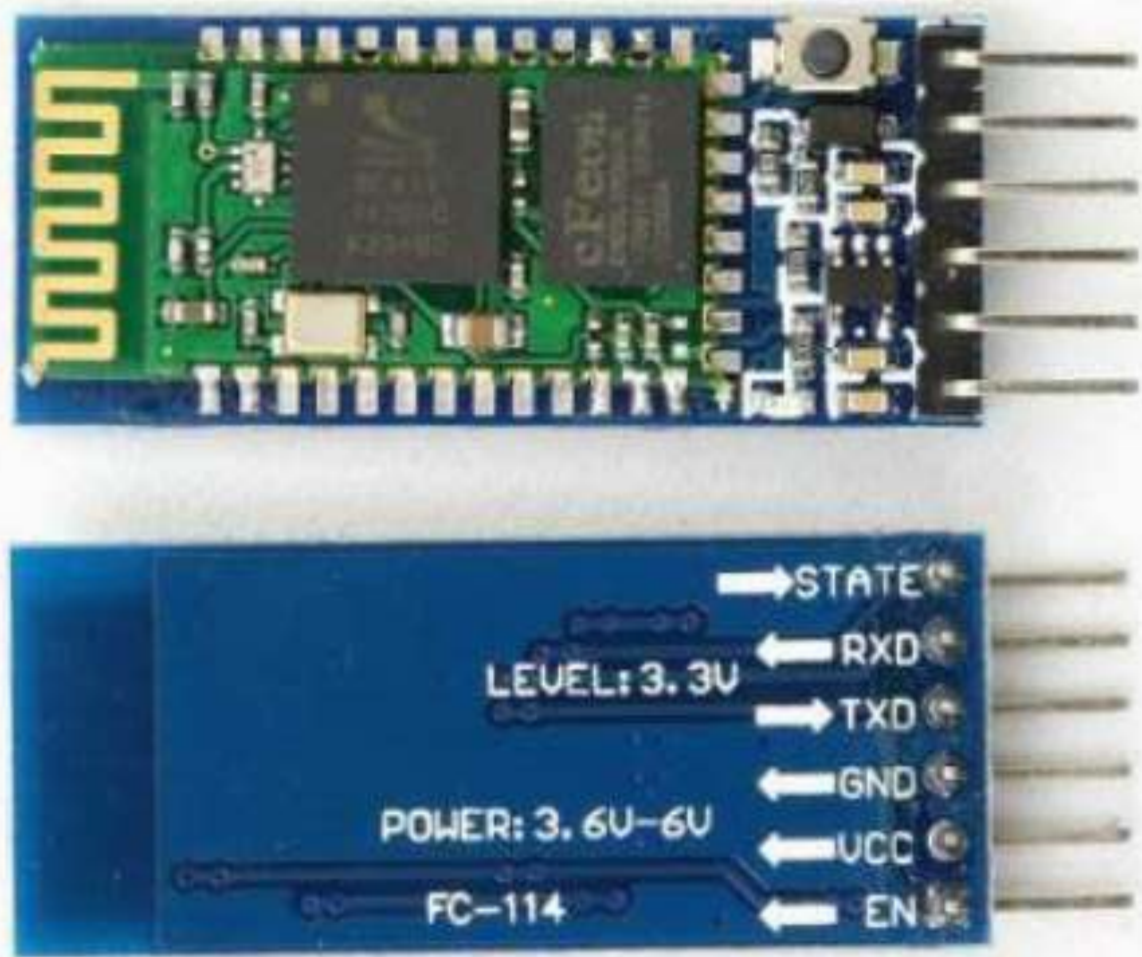

we have already seen Tx and Rx
GROUND and VCC is also common
we almost never use STATE

~ By K.S.