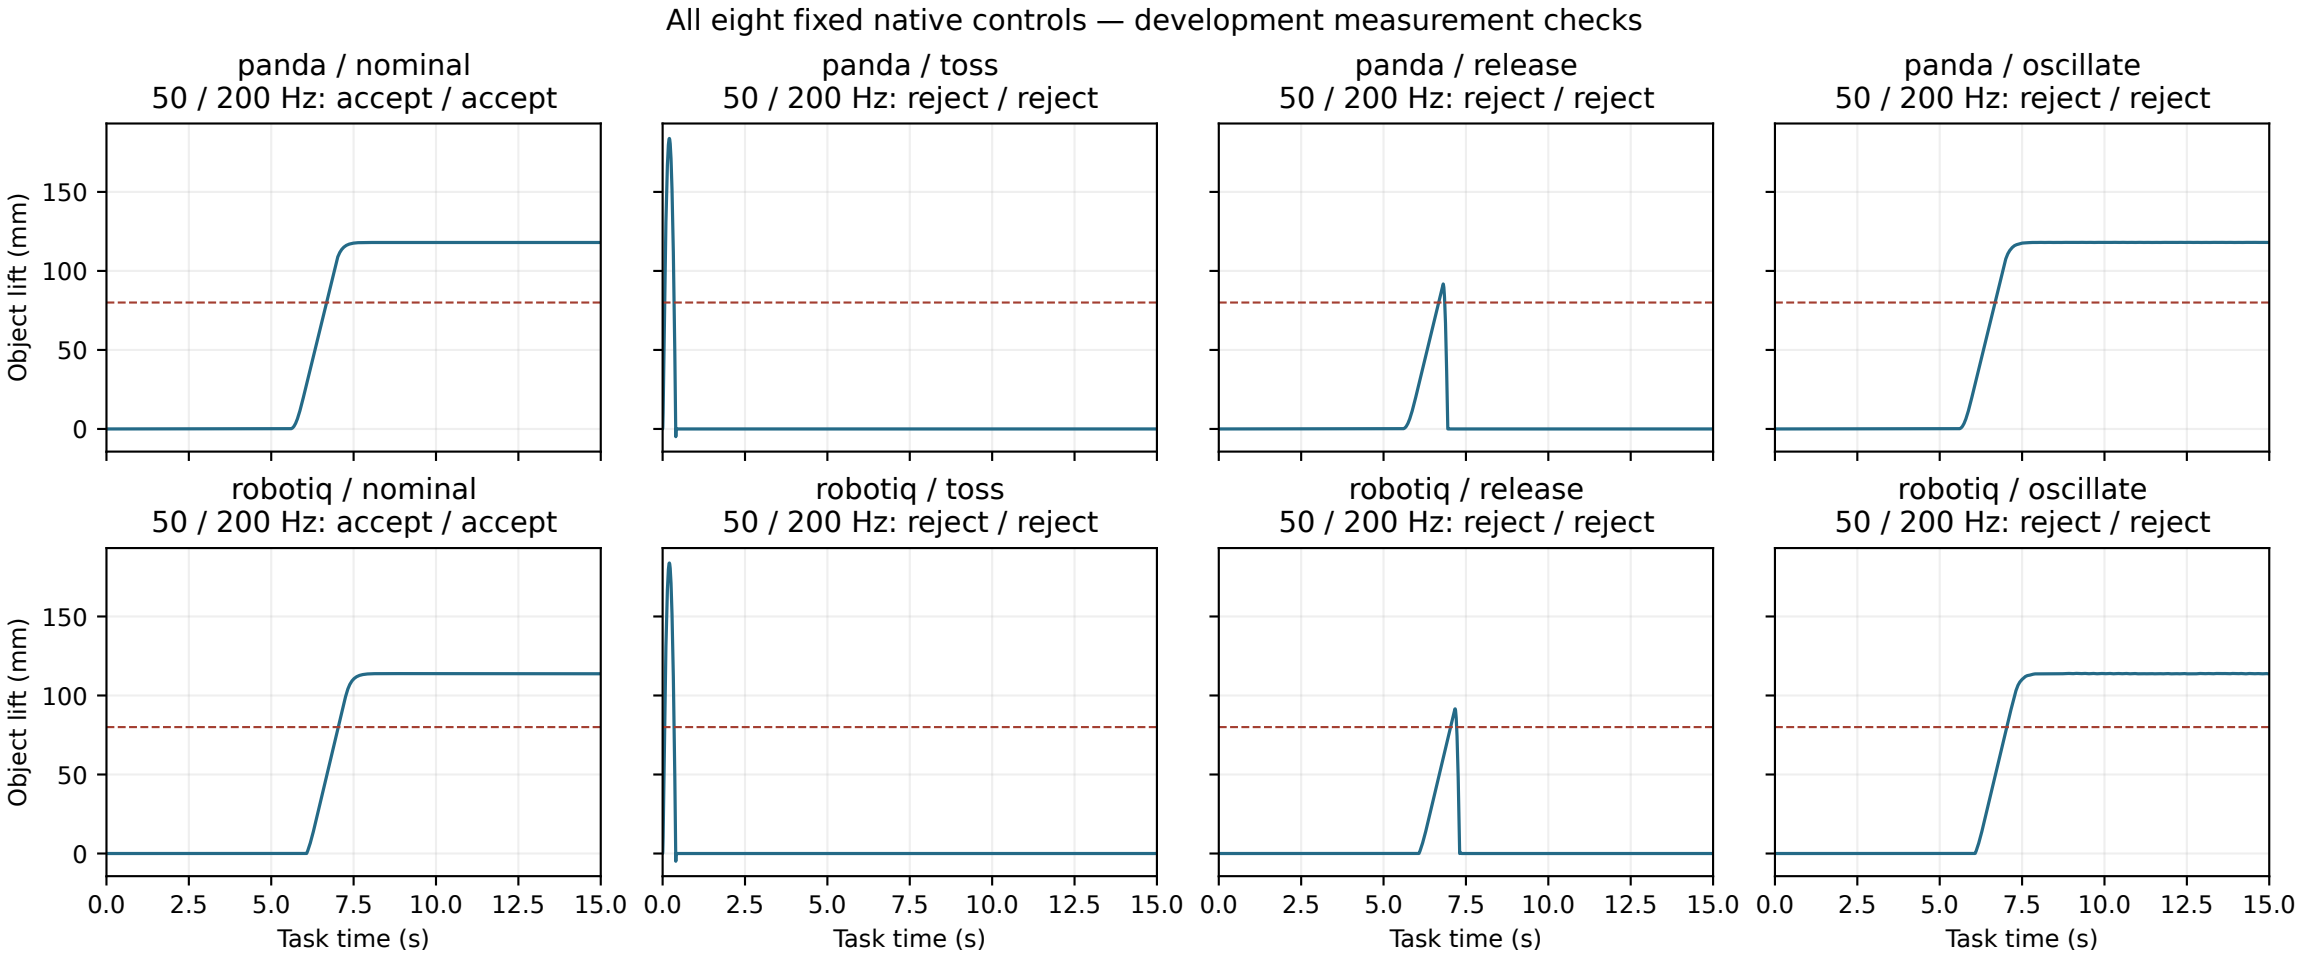
All eight fixed native controls — development measurement checks
panda / nominal
50 / 200 Hz: accept / accept
panda / toss
50 / 200 Hz: reject / reject
panda / release
50 / 200 Hz: reject / reject
panda / oscillate
50 / 200 Hz: reject / reject
robotiq / nominal
50 / 200 Hz: accept / accept
robotiq / toss
50 / 200 Hz: reject / reject
robotiq / release
50 / 200 Hz: reject / reject
robotiq / oscillate
50 / 200 Hz: reject / reject
Object lift (mm)
0
50
100
150
0.0
2.5
5.0
7.5
10.0
12.5
15.0
Task time (s)