



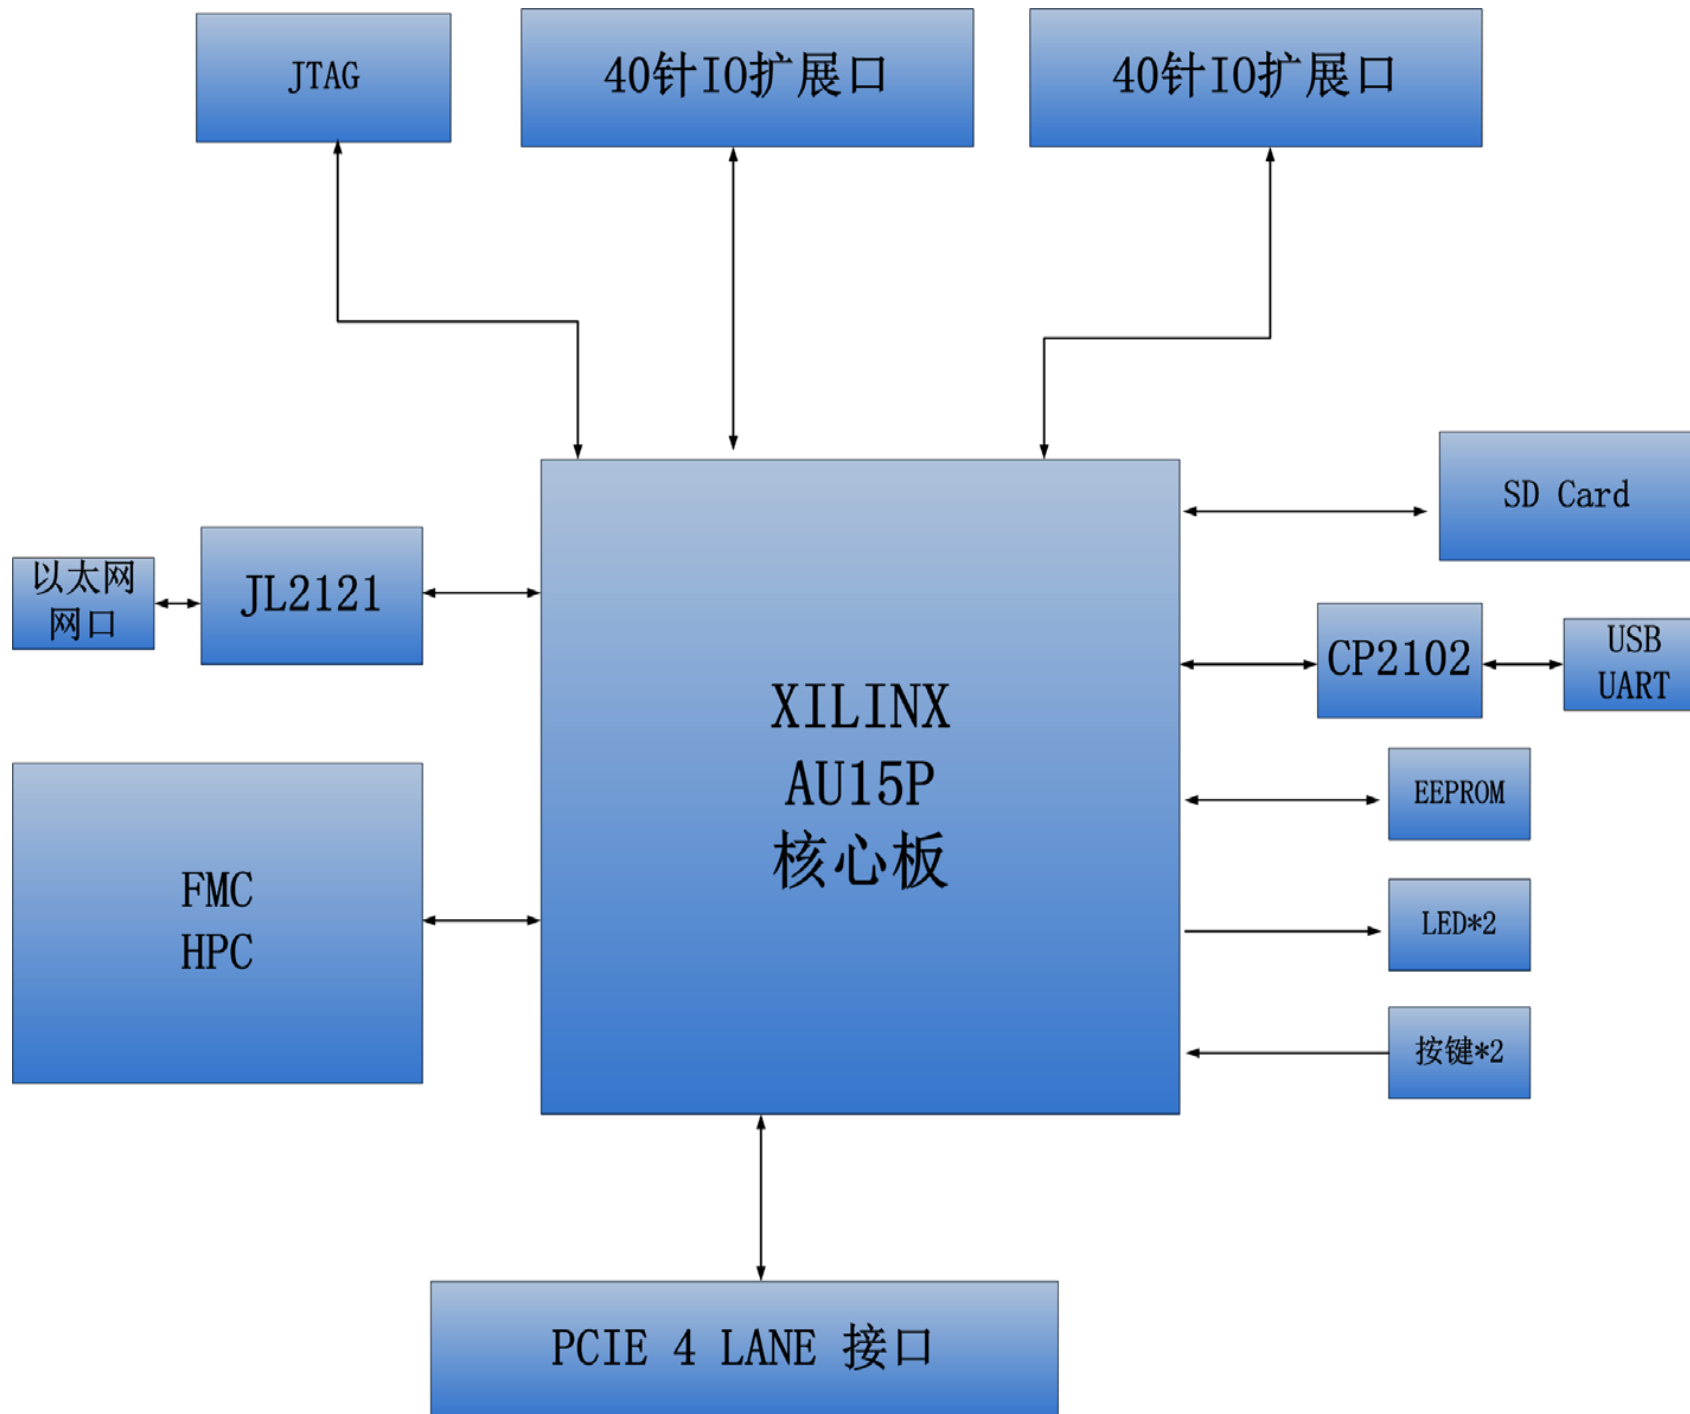
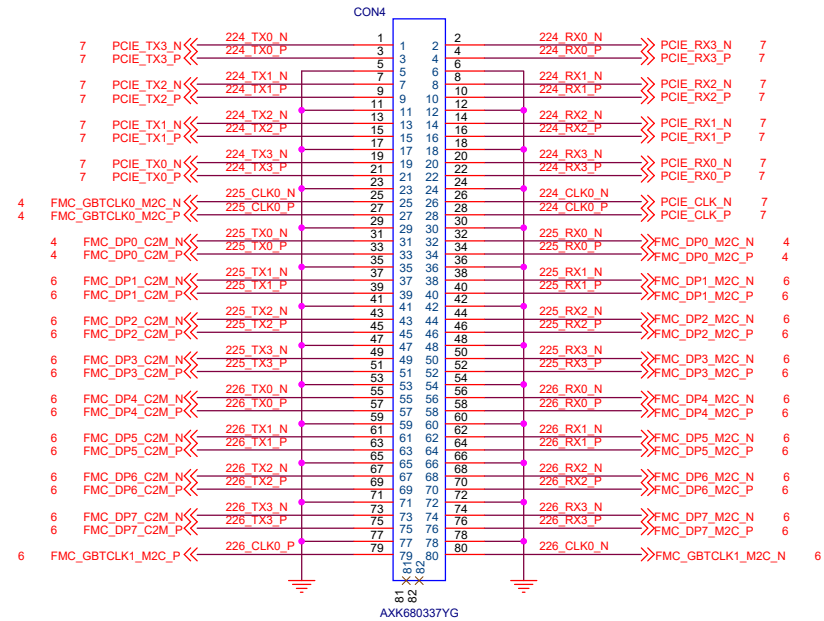
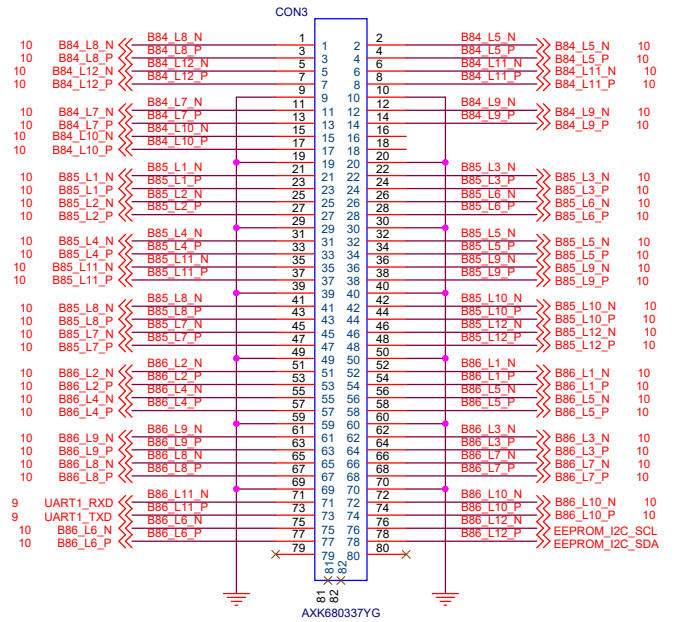
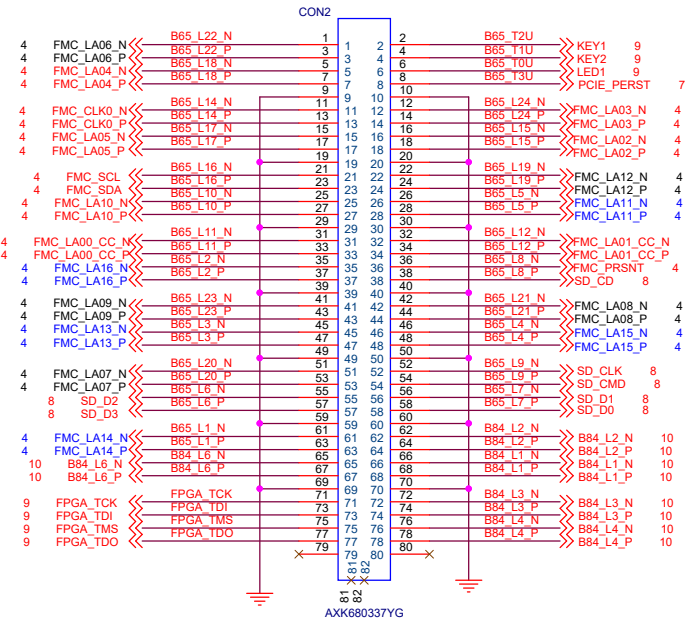


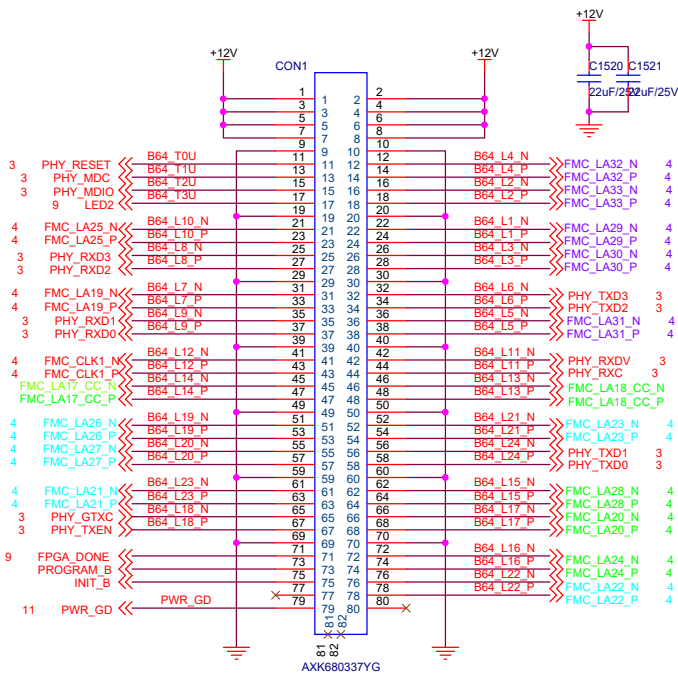



BANK84,85,86 IO is 3.3V Standard
BANK64,BANK65 IO is 1.8V Standard

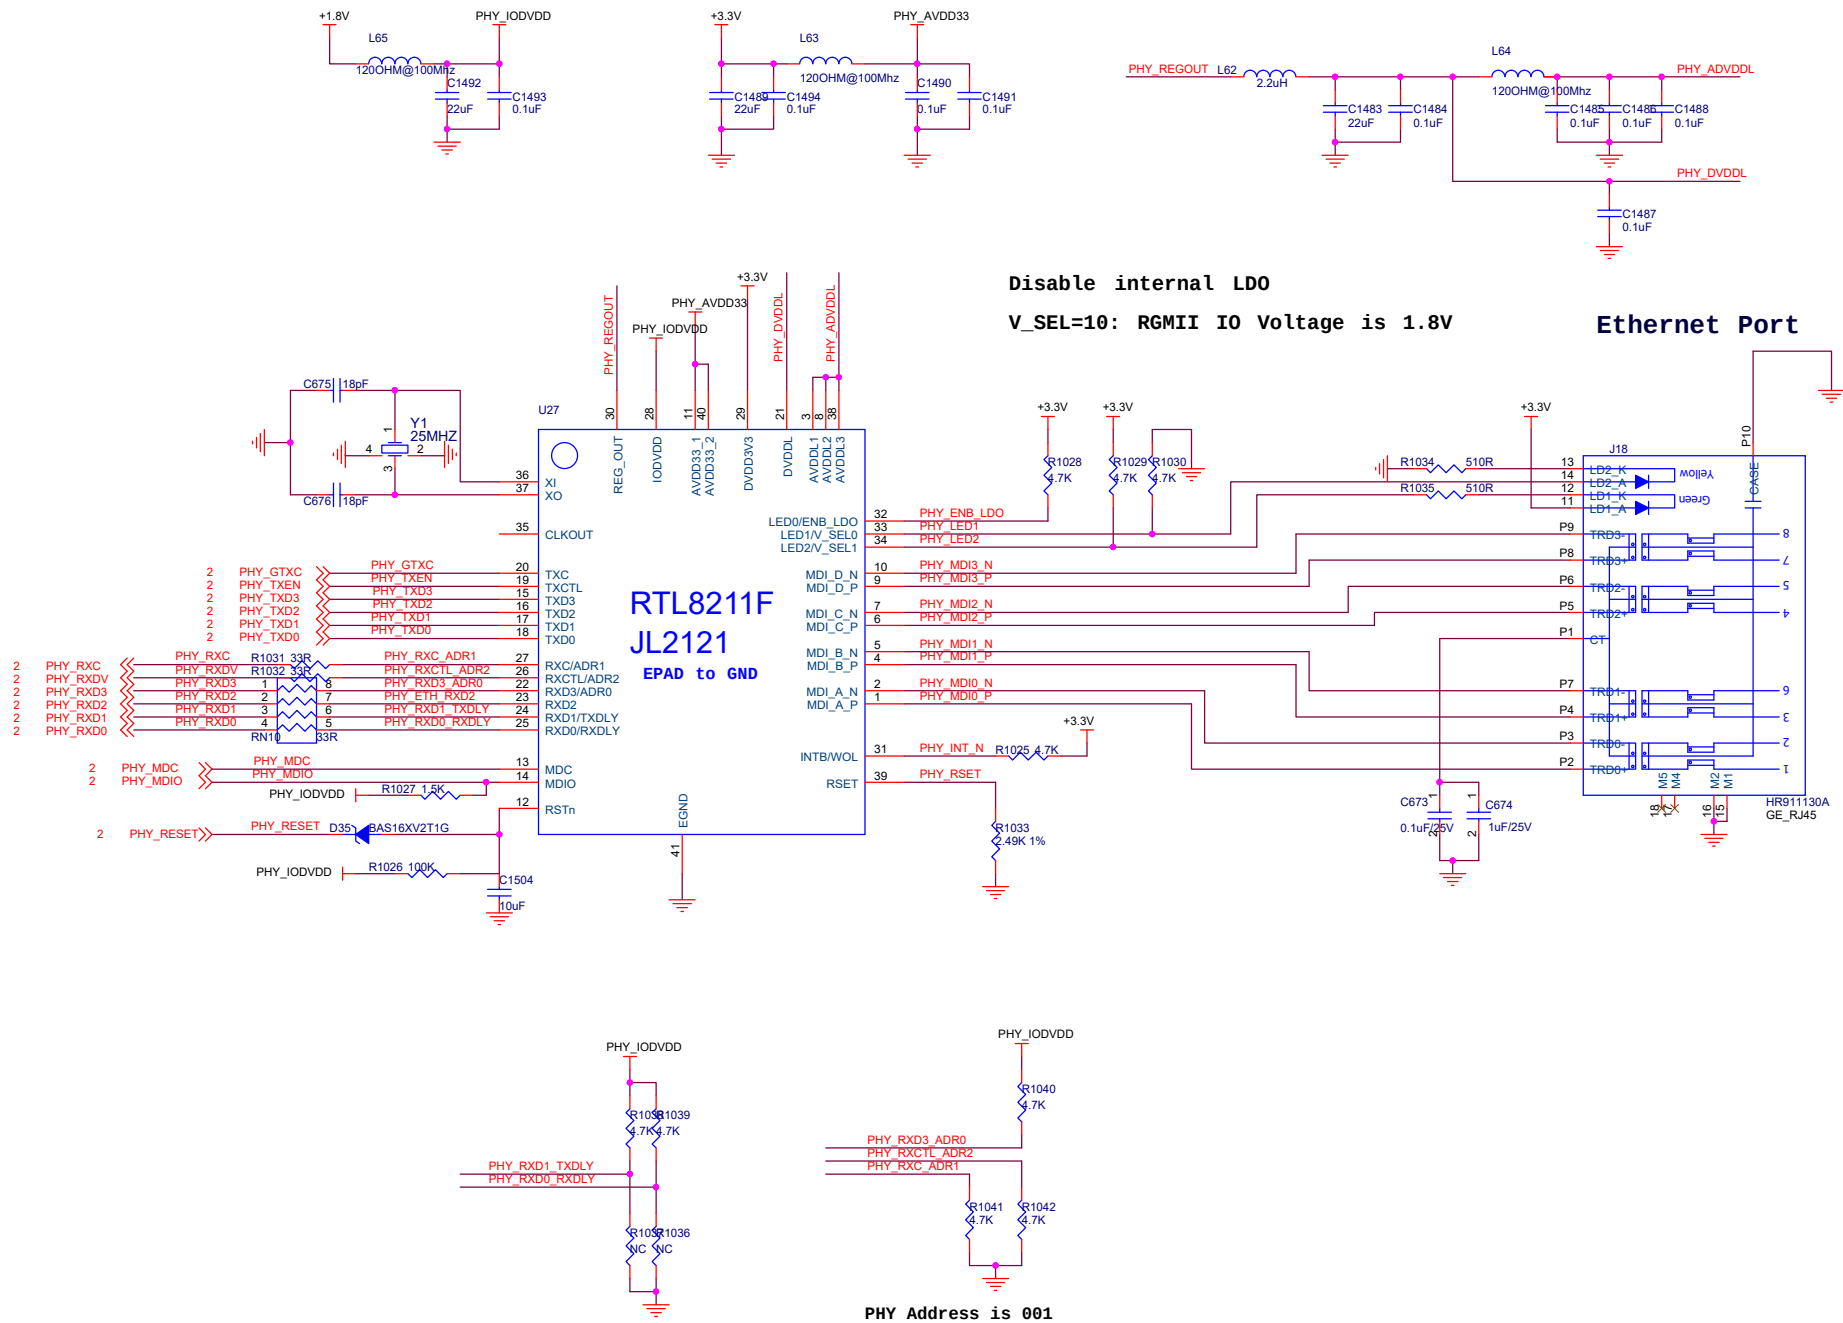

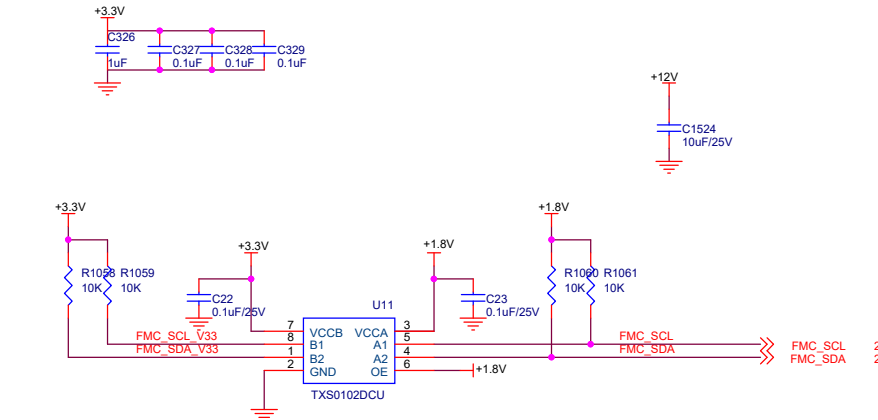



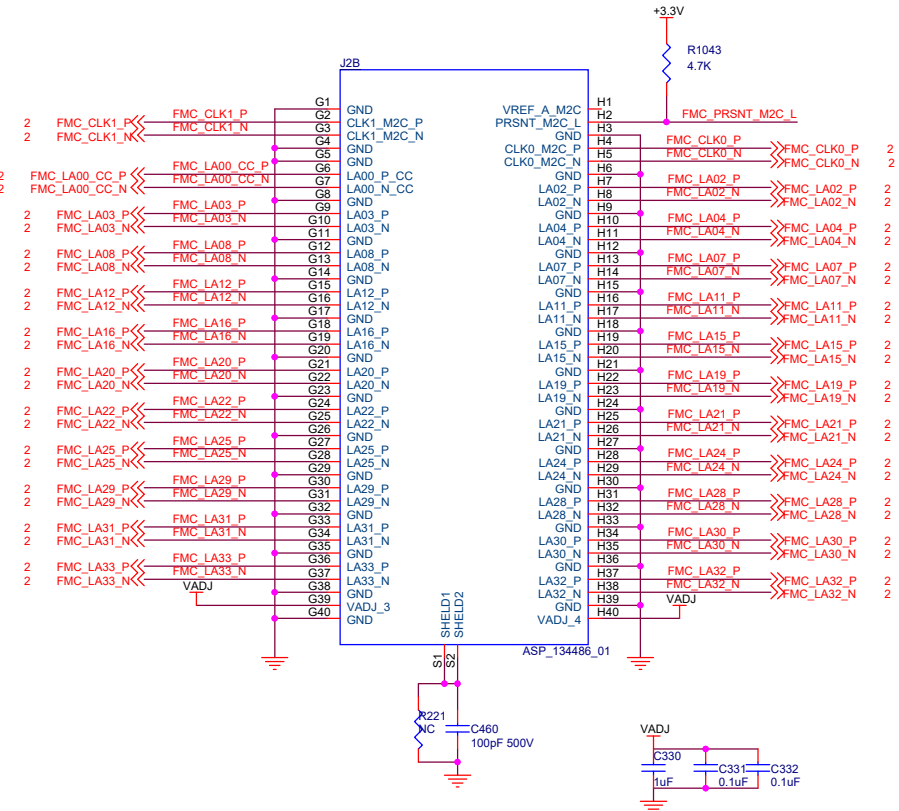


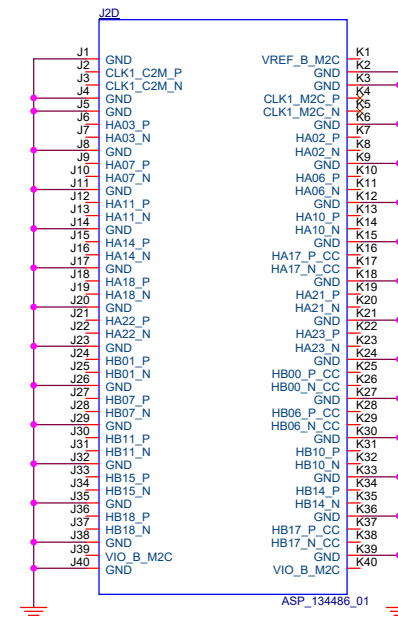


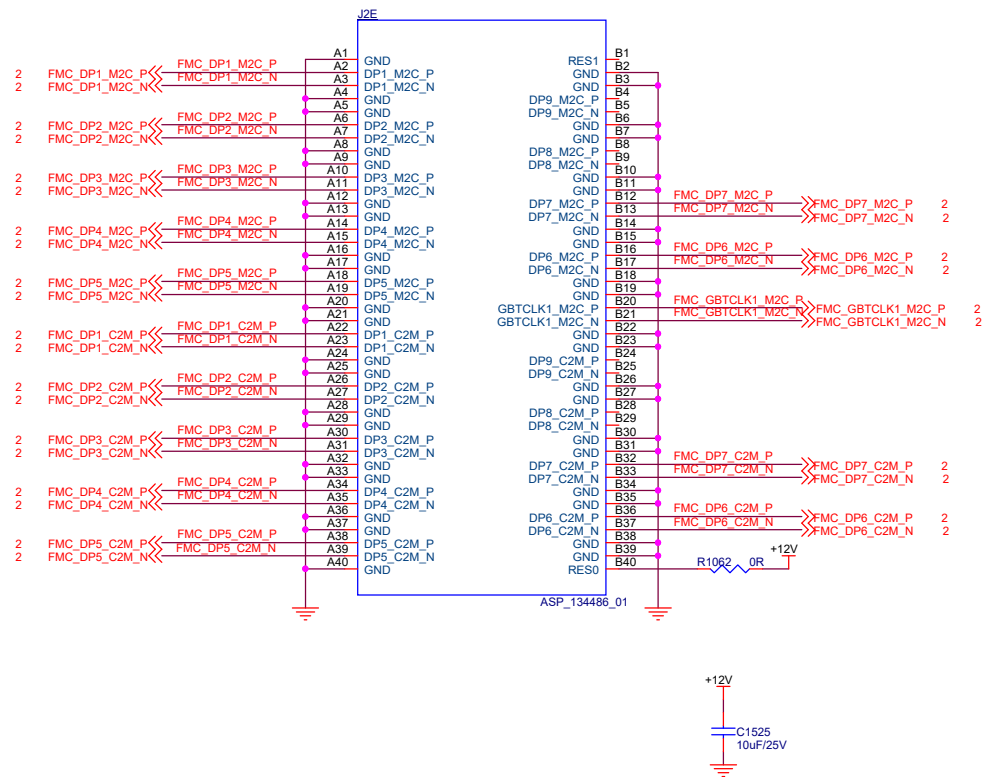

PCIE X4 SLOT

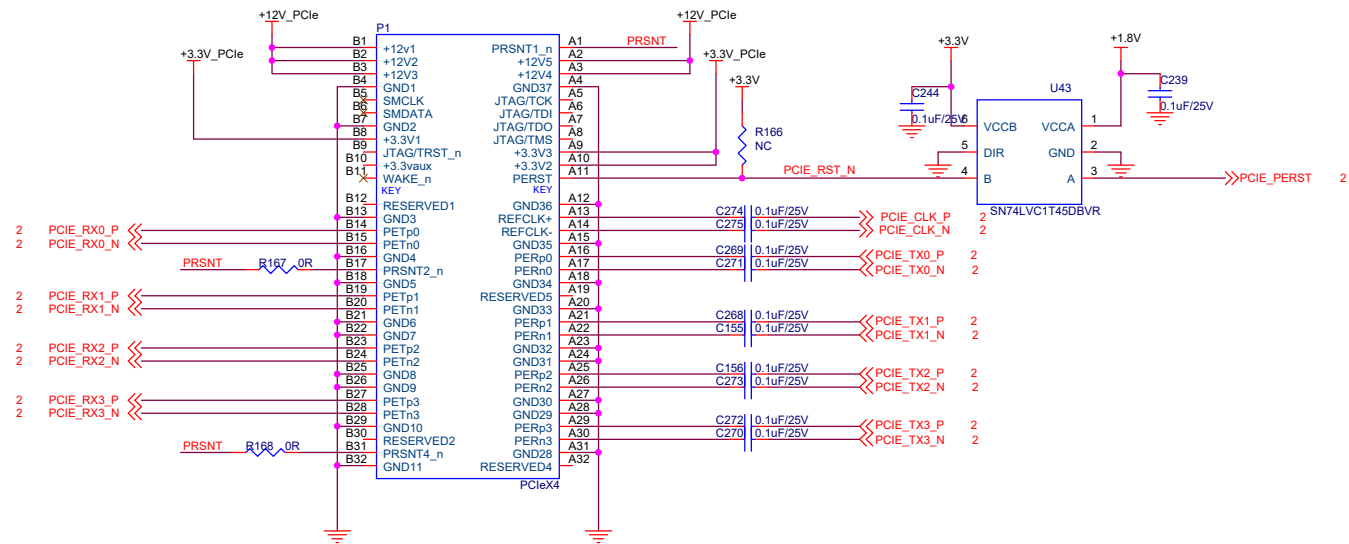


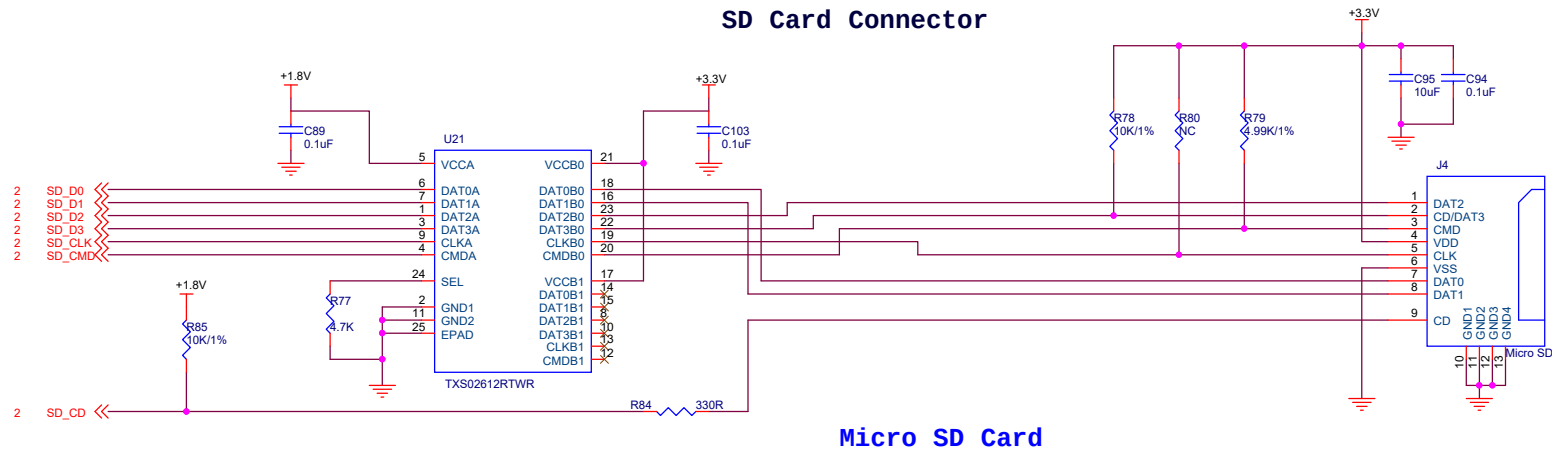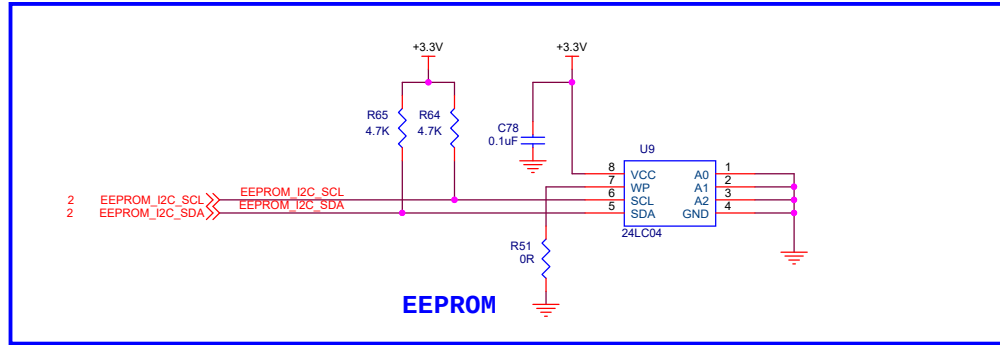



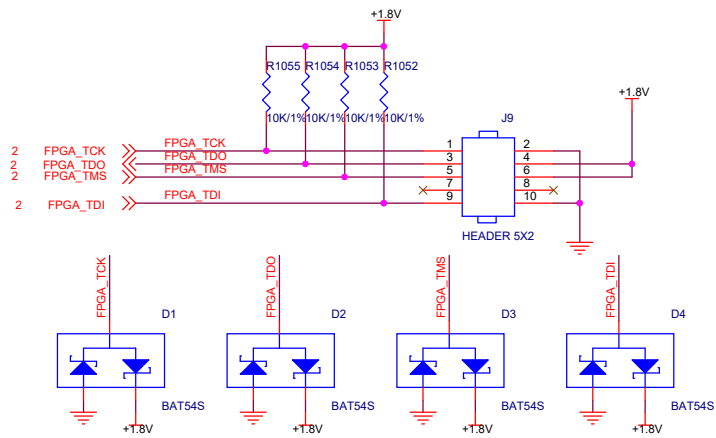


JTAG Connector

FPGA DONE LED


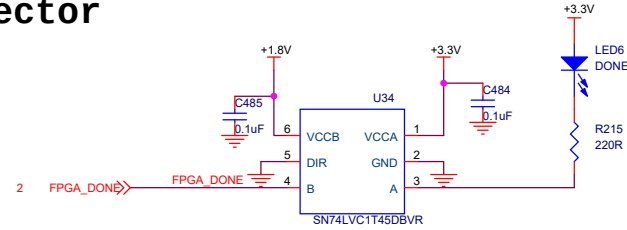


USB Uart

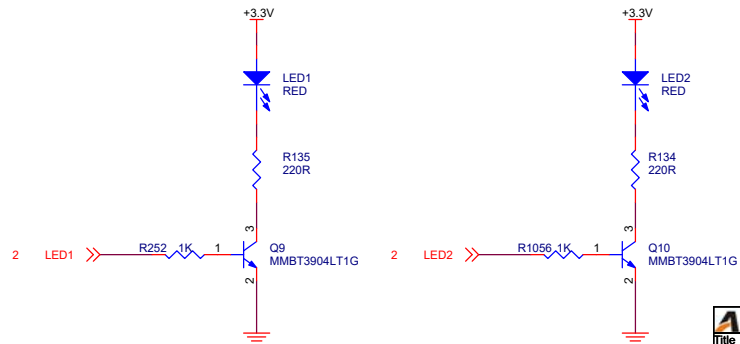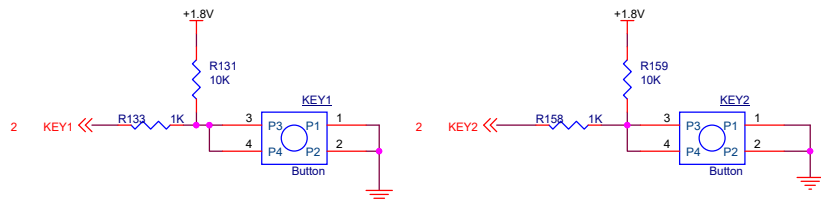
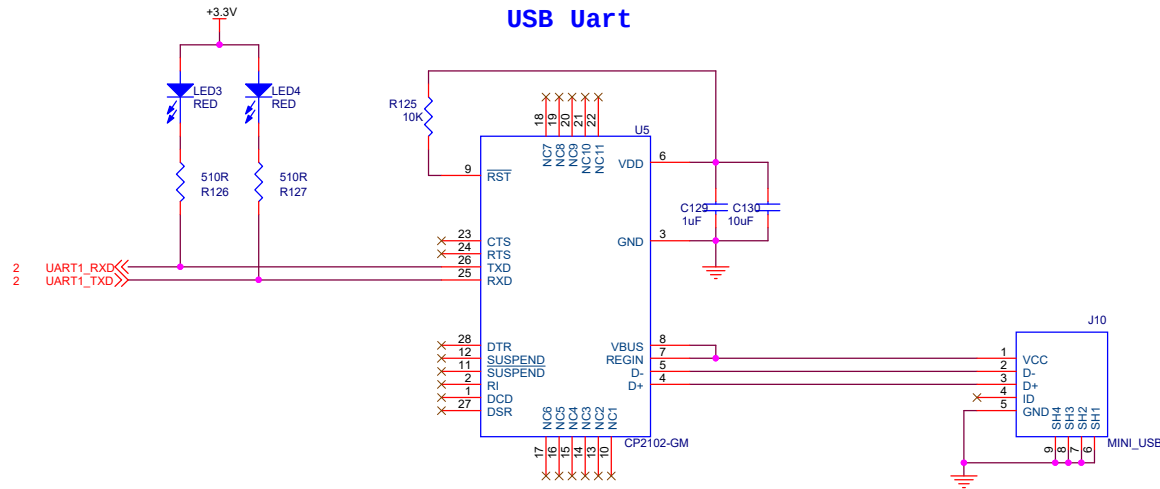


ALINX Confidential


FPGA 40 PIN External IO

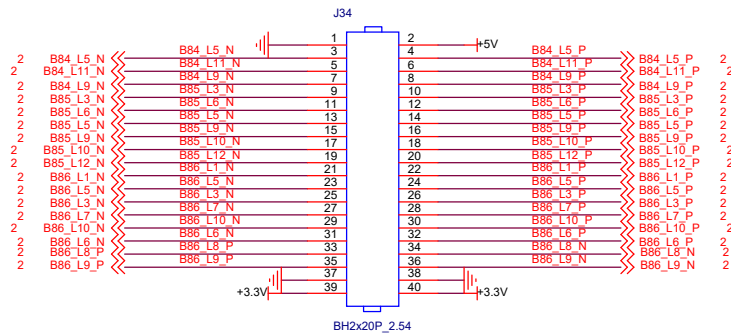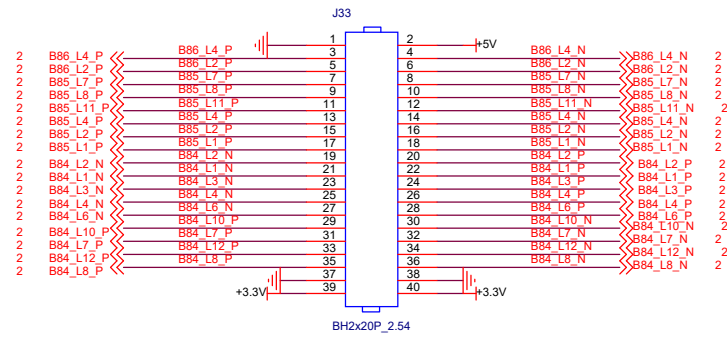

12V/2A AC Adapter

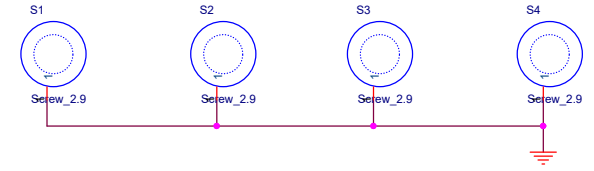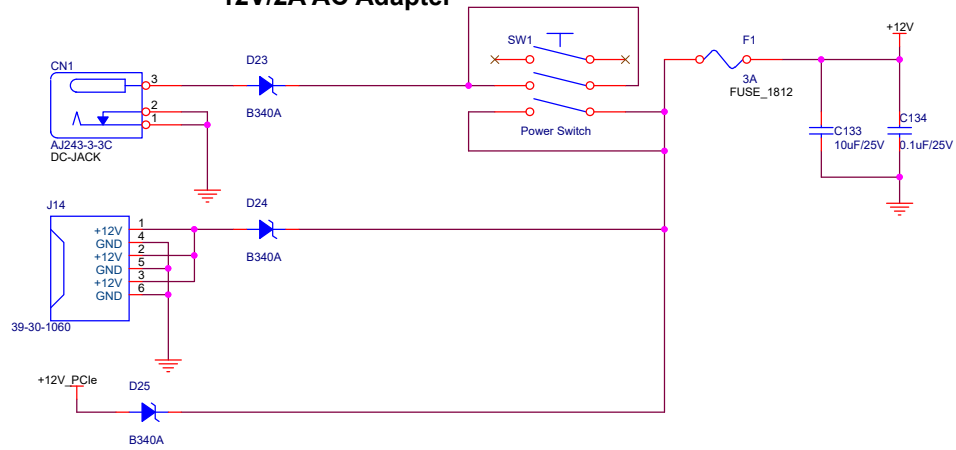


+5V POWER

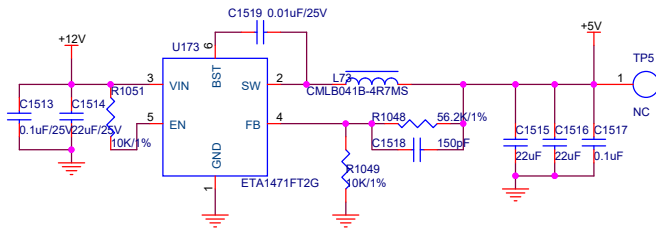


$$V_{out} = 0.8 \times (1 + R1/R2)$$


+3.3V POWER

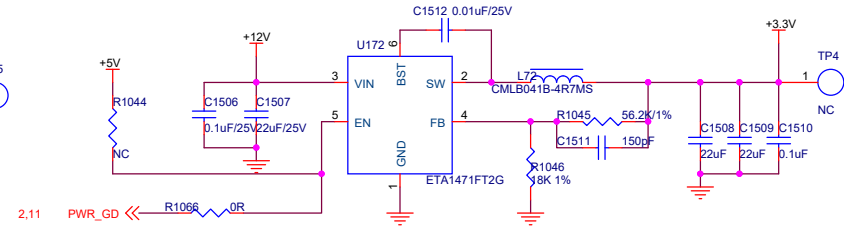

$$V_{out} = 0.8 \times (1 + R1/R2)$$




+1.8V POWER

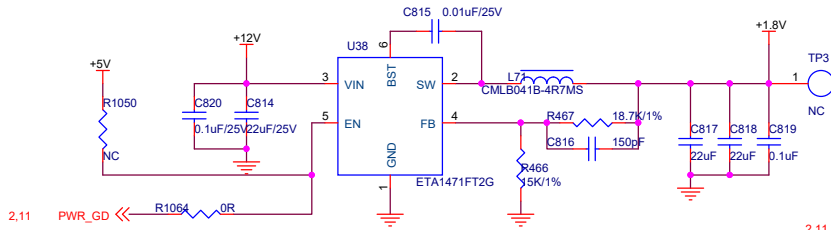

$$V_{out} = 0.8 \times (1 + R1/R2)$$

1.8V or 1.2V POWER 3A

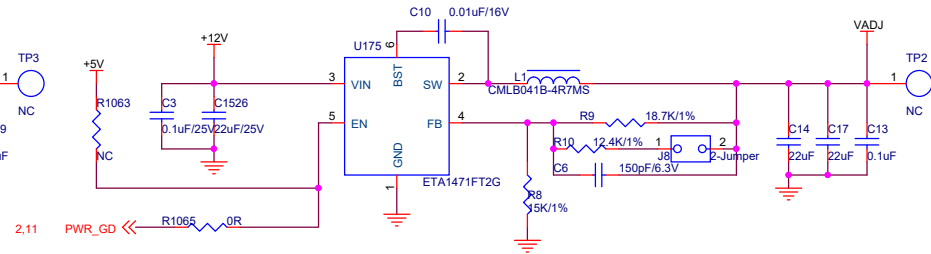

$$V_{out} = 0.8 \times (1 + R1/R2)$$