

16-BIT MULTIPLICATION

EXP NO: 7

AIM: To write an assembly language program to implement 16-bit multiplication using 8085 processor.


ALGORITHM:

- 1) Load the first data in HL pair.
- 2) Move content of HL pair to stack pointer.
- 3) Load the second data in HL pair and move it to DE.
- 4) Make H register as 00H and L register as 00H.
- 5) ADD HL pair and stack pointer.
- 6) Check for carry if carry increment it by 1 else move to next step.
- 7) Then move E to A and perform OR operation with accumulator and register D.
- 8) The value of operation is zero, then store the value else go to step 3.

PROGRAM:

```
LHLD 2050
    SPHL
    LHLD 2052
    XCHG
    LXI H,0000H
    LXI B,0000H
AGAIN: DAD SP
    JNC START
    INX B
    START: DCX D
    MOV A,E
    ORA D
    JNZ AGAIN
    SHLD 2054
    MOV L,C
    MOV H,B
    SHLD 2056
    HLT
```

INPUT\OUTPUT:

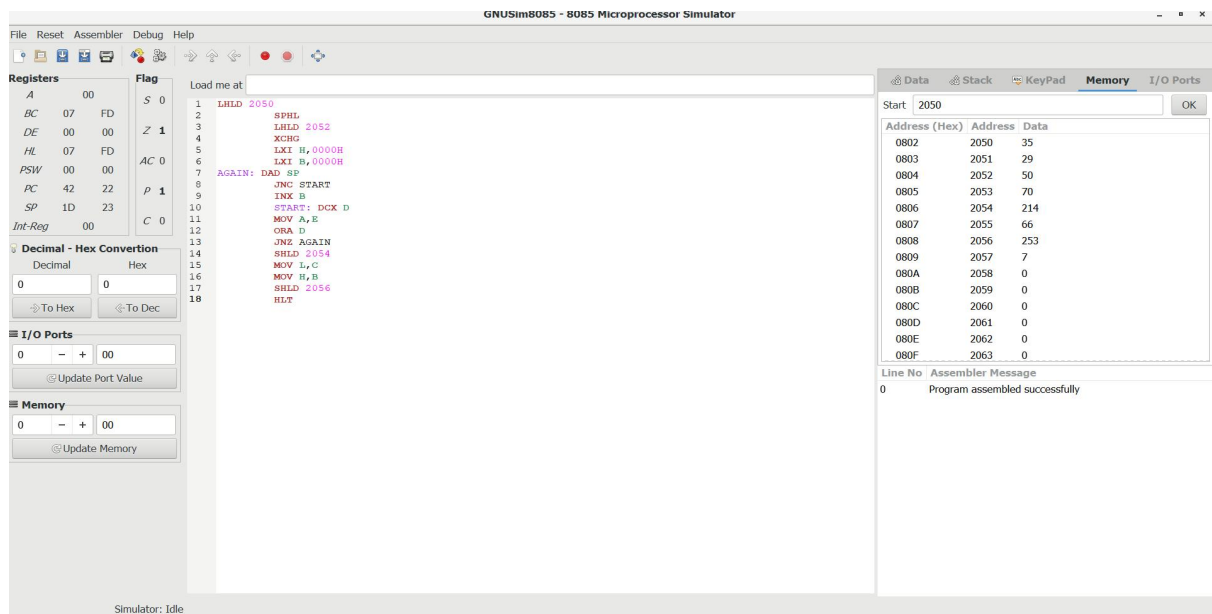

RESULT: Thus the program was executed successfully using 8085 processor simulator.