

Performance testing – Coefficient of Friction

Test Formulation


- All additives dosed at 1% based on total formula weight
- Tested in a hard waterbased PUD binder
- Test panels dried for 7 days at room temperature at ~50% humidity before evaluating

Test Method

- Flat bed COF tester
- Coating applied to sealed Leneta card at 1.2 mils (30 μ m)
- Force measured with 200 g steel weight at speed of 6 inches/minute


COF Result

COF Results

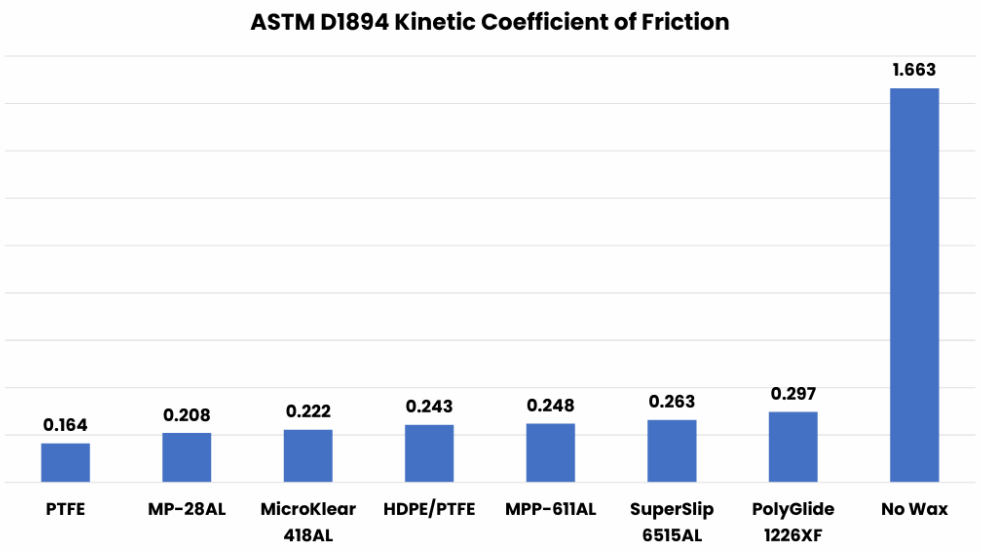


Scratch resistance testing


Pencil scratch hardness

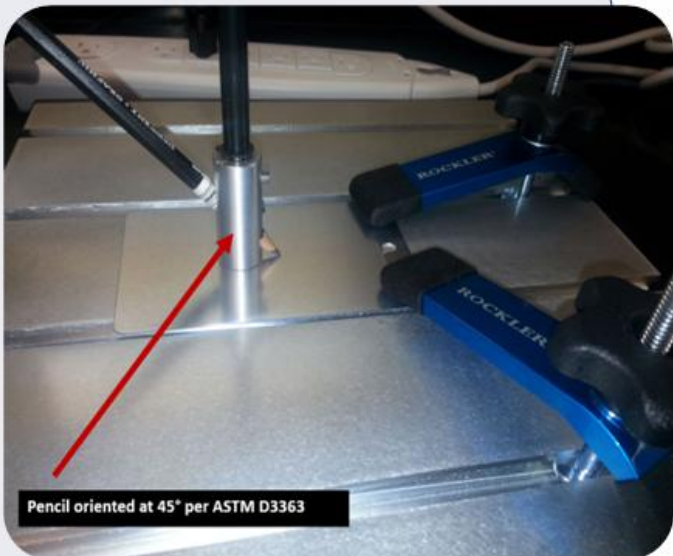

The HB scale uses specially formulated pencils ranging from softest (9xxB) to hardest (9H). As the pencil core becomes softer, it leaves a darker mark as it deposits more graphite on the paper.

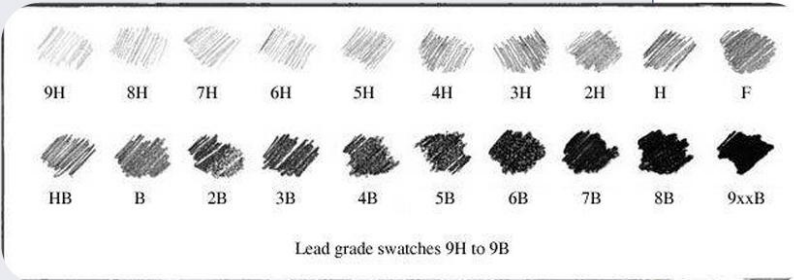

MPP-611AL (HDPE/aluminum oxide)

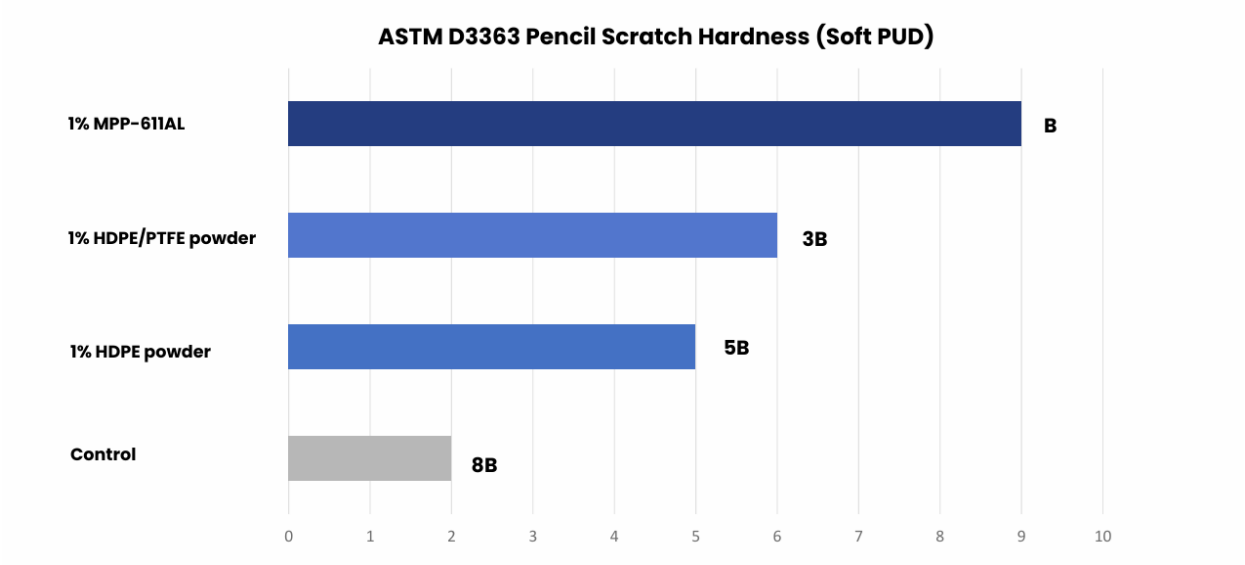

Türkiye: Axalta



MPP-611AL alumina fortified
HDPE

Packaging Coatings

PTFE-free beverage
varnishes and end
enamels