

Performance Study Overview

- Compare the following PropylMatte grades
 - PropylMatte 31, PropylMatte 31HD & PropylMatte 31SA
 - Clear waterborne 1K polyurethane dispersion
- Preparation
 - Reichhold Urotuff L63-MPW38
 - Level of addition at 4.0% TFW
 - #60 rod - 6.0 mil WFT
 - S-18 Taber panels
 - Dried one week




Study Overview

- Taber Abrasion Analysis
 - CS17 wheel
 - Produces a harsher abrasion than the smoother CS-10 wheel
 - 1,000 gram load
 - 3,000 cycles - 500 cycles
 - Check the panels weight
 - Repurpose the wheel




Study Overview


- Coefficient of friction (COF)
 - Static and kinetic
 - 200g sliding sled - 0.1 inches/second
 - Measured by a force gauge
- Measuring gloss of the cured film
 - 60° & 85°

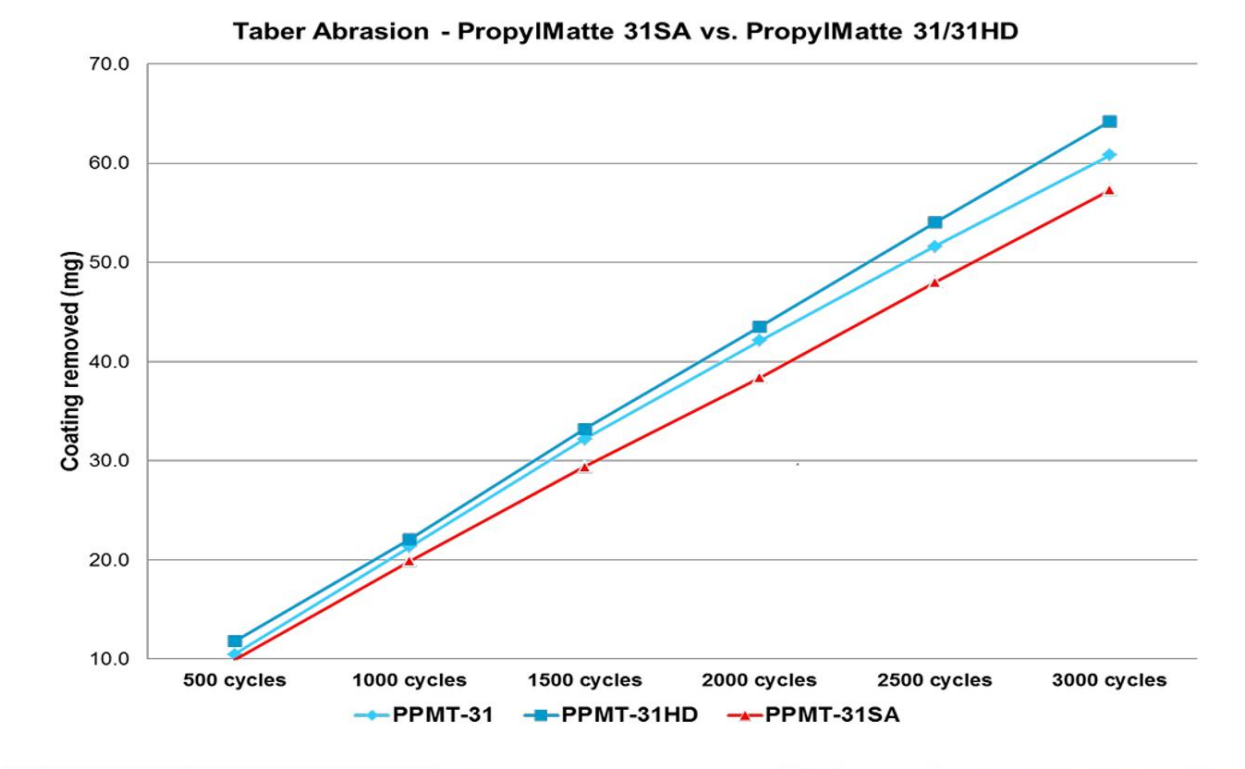


Coating removed after 2,000 cycles (mg)

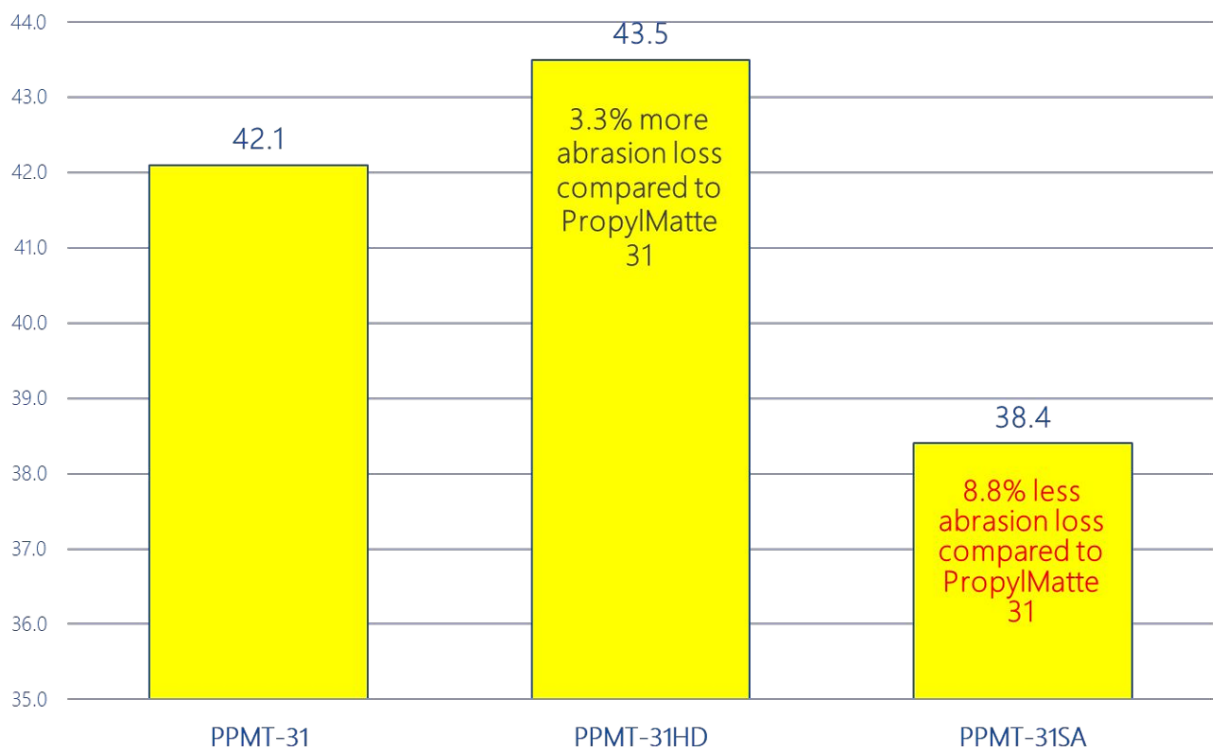

COF comparison of PropylMatte 31, 31HD and 31SA

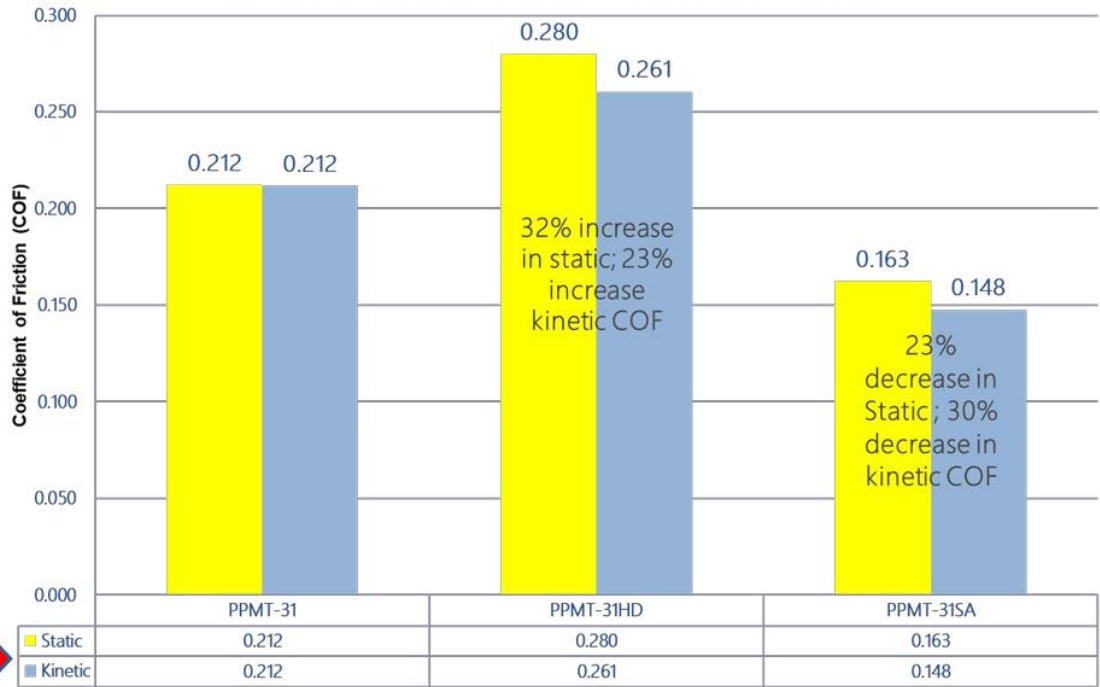

Gloss reduction at 4.0% dosage (on TFW)

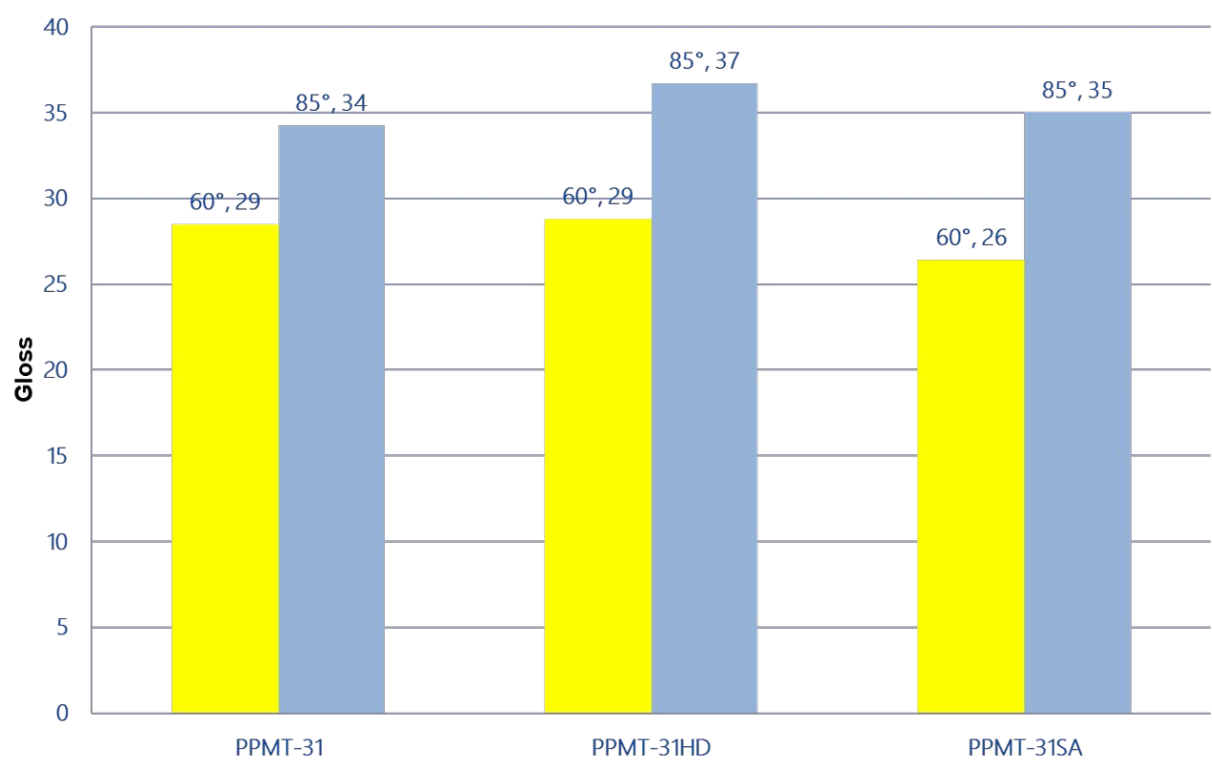

Powder Coatings Q-panels

- Preferred dark (black) color
 - Demonstrates clarity
- Common resin systems
 - Polyester/TGIC
 - Epoxy/Polyester Hybrid
- Recommended % dosage
- Formulations available upon request

