



MP-28AL vs. Polyolefin Wax-PTFE


- **Objective:** Compare MP-28AL: Synfluo 178XF, Lanco TF -1778 and TF1780
 - 1.0% TFW - 1K aqueous polyurethane

Physical Property:	Micro Powders Synfluo 178XF	Lubrizol Lanco TF-1778	Lubrizol Lanco TF-1780
Wax Type	Synthetic wax/PTFE	PE/PTFE	PE/PTFE
Melting Point °C	104 – 110	102	102
Density at 25 °C (g/cc)	0.98	1.04	1.07
Mean particle size (µm)	3.0 – 5.0	~6.0	~5.0
Maximum particle size (µm)	15.56 (D100)	14.00 (D90)	10.00 (D90)

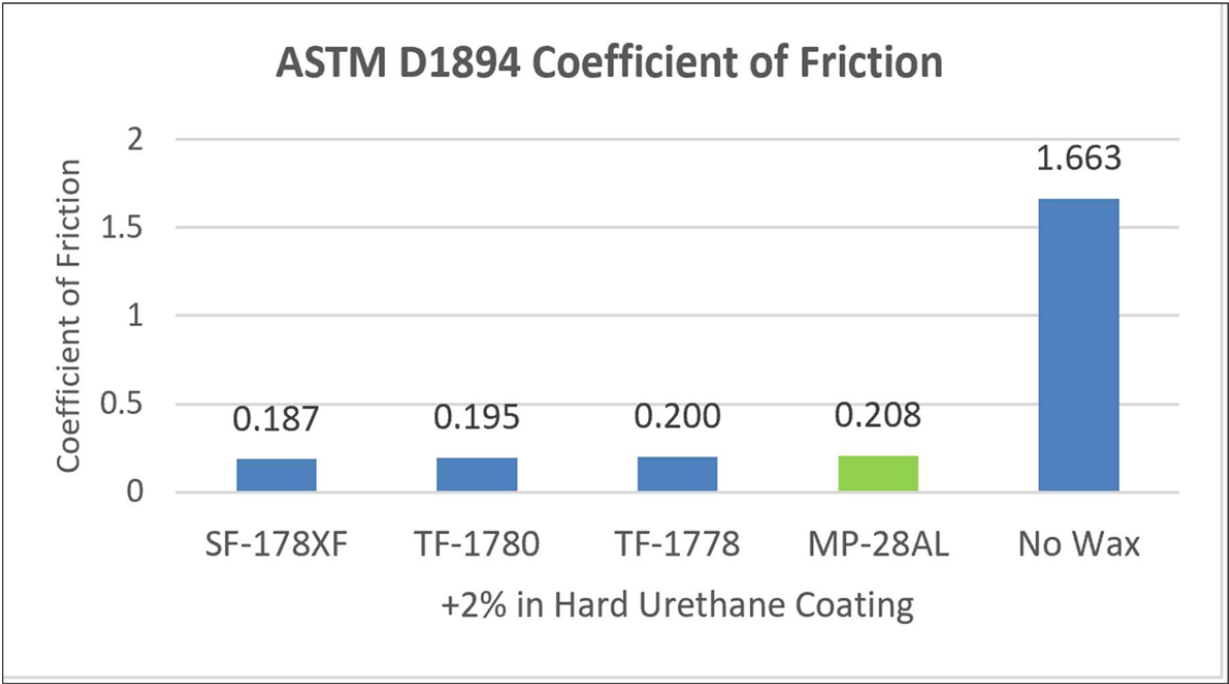

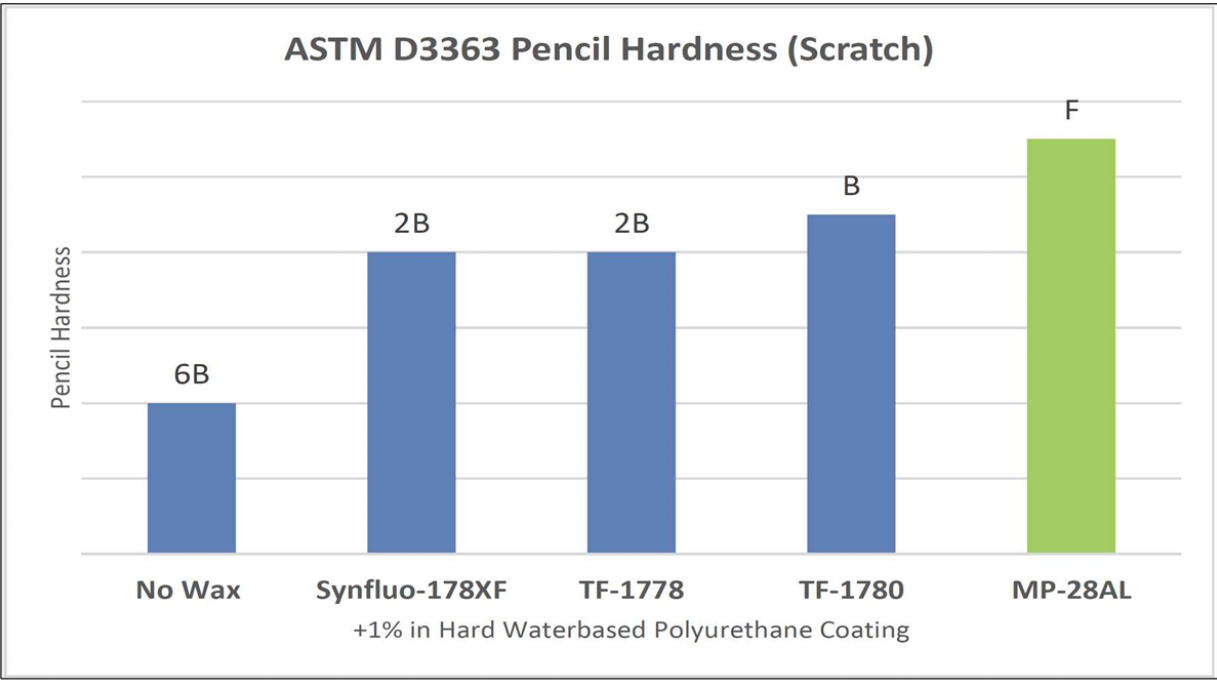

Pencil Scratch Hardness Rating													
Soft				Mid-Point		Hard							
8B	7B	6B	5B	4B	3B	2B	B	HB	F	H	2H	3H	4H

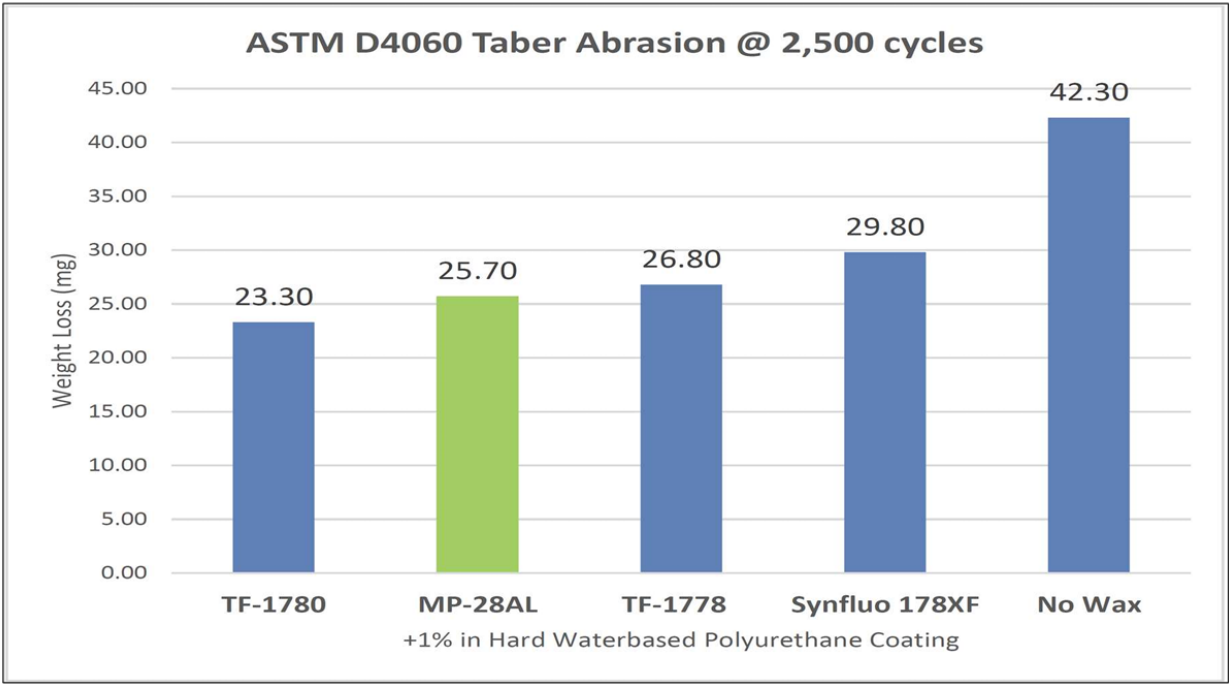

案例

•

