

Performance Study

- Objective: Evaluate the performance of SuperGlide 1231 vs. Fluo 300 PTFE


Physical Property:	SuperGlide 1231	Fluo 300
Wax Type	EBS/ceramic	PTFE
Melting Point °C	141 - 146	>316
Density @ 25 °C (g/cc)	1.00	2.20
Mean particle size (µm)	5.0 – 8.0	5.0 – 6.0
Maximum particle size (nm)	22.0	22.0


Hard Urethane Formula:	Weight %:
UROTUF L63-MPW-38 (Reichhold)	97.5
Diethylene glycol monoethyl ether	2.0
BYK-345	0.2
TEGO Foamex 805 N	0.3
Total:	100.0

Test Methods


- **Abrasion Resistance** by Taber Abraser
- Drawn down on S-18 aluminum plates with a #60 wire rod to produce 2.4 mil (60 µm) DFT coatings. 2,500 cycles with a CS17 wheel
- **Film Hardness - Pencil Scratch** by Linear Taber Abraser
- Drawn down on 4" x 6" steel panels with a #28 wire rod to produce approximately 1.0 mil (25 µm) DFT coatings.
- **Coefficient of Friction** by Sliding Bed COF Tester
- Drawn down on sealed Leneta with a 3-mil Bird bar to produce approximately 1.2 mil (30 µm) DFT coatings.

Note: All coatings are allowed to cure for 7 days at room temperature at ~50% humidity

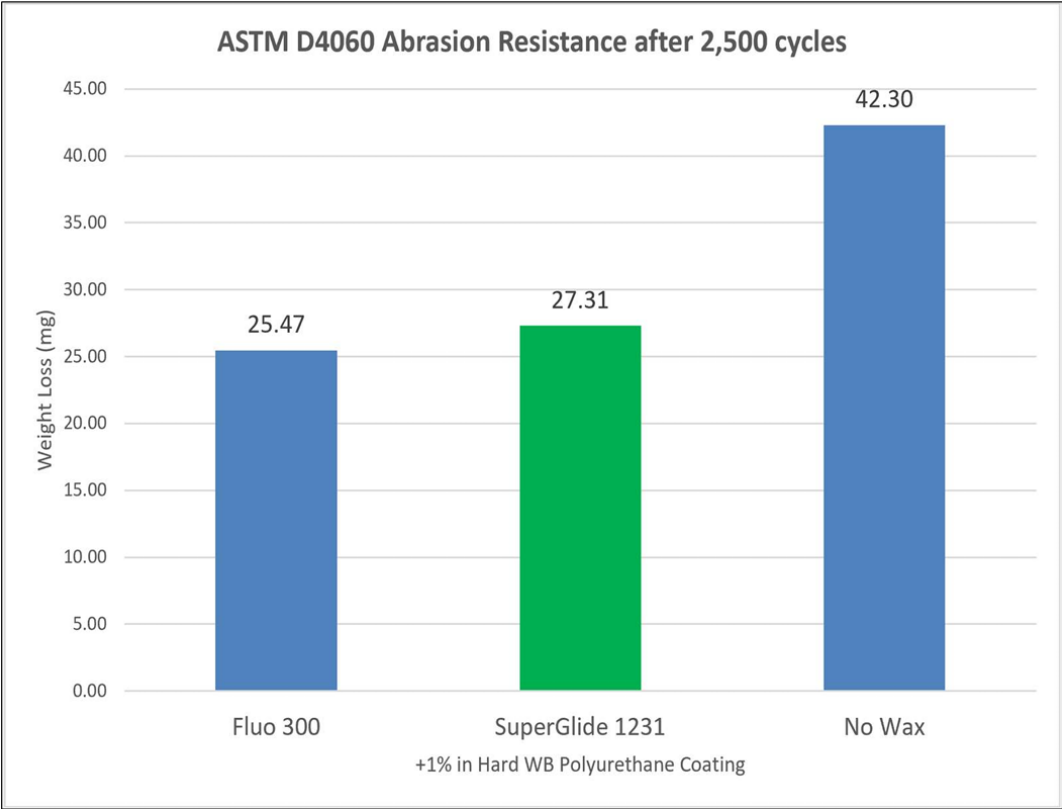

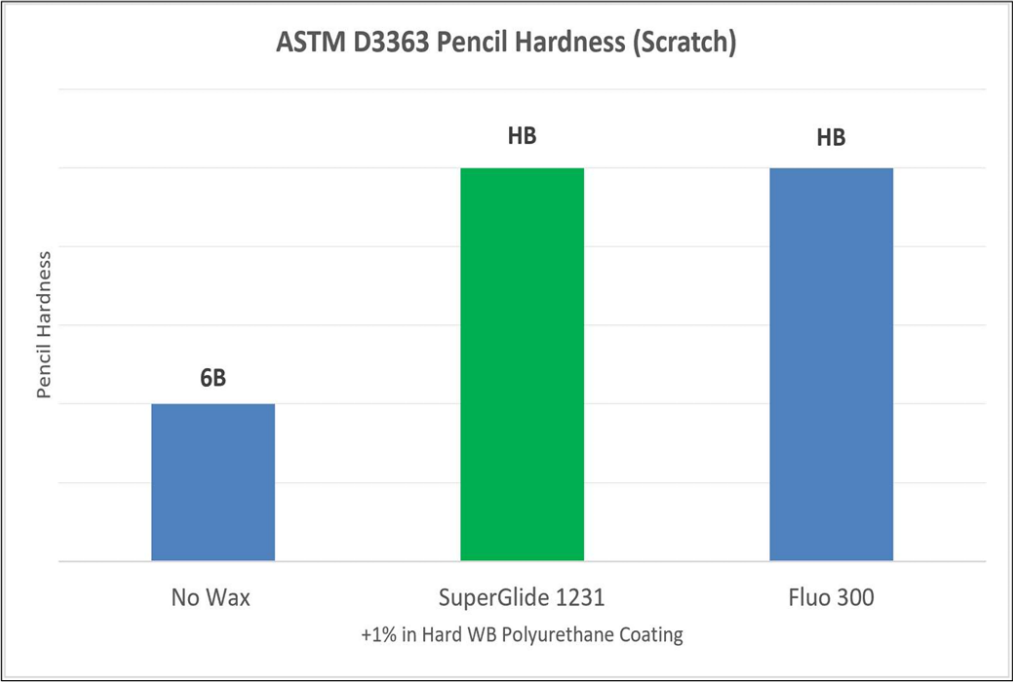

Pencil Scratch Hardness Rating													
Soft ←						Mid-Point		→ Hard					
8B	7B	6B	5B	4B	3B	2B	B	HB	F	H	2H	3H	4H

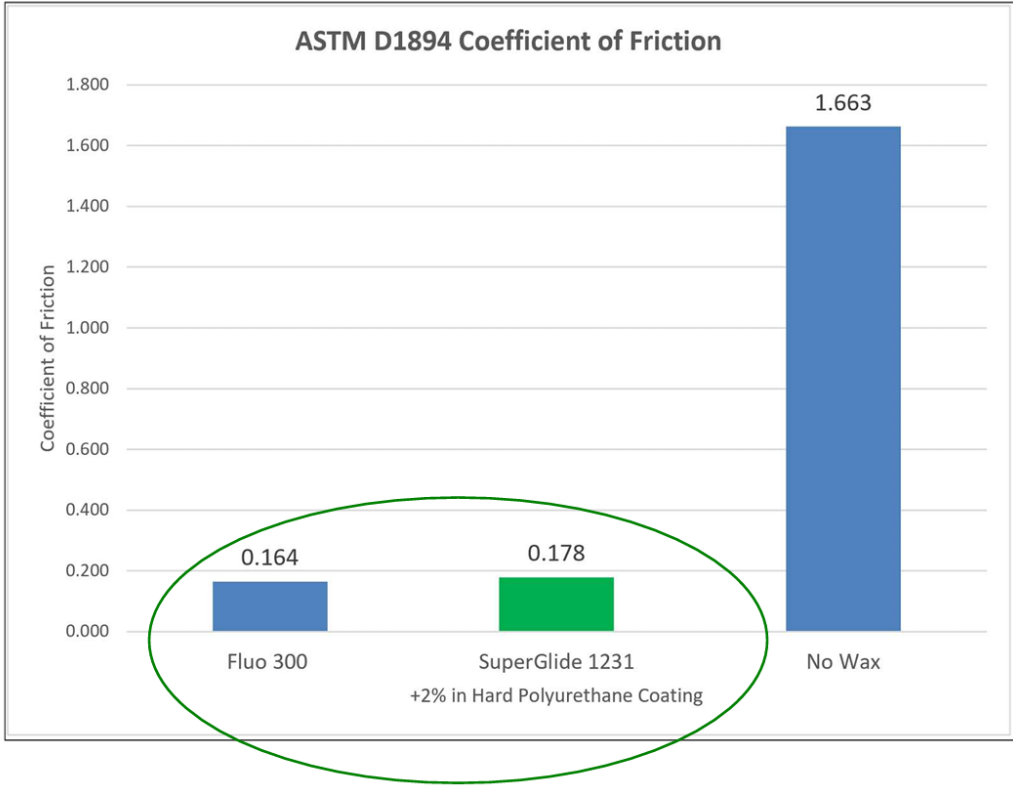

案例



Wood Furniture Finishes
Scratch Resistance



Powder Coatings
Abrasion and out-gassing



Can and Container Coatings
Abrasion resistance and slip