


Recommended PCB Layout

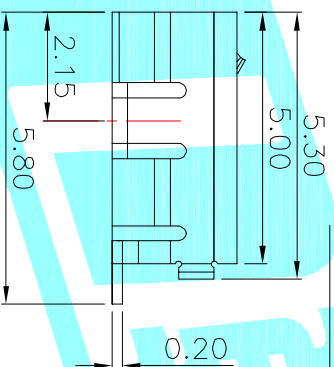

SPECIFICATIONS

1.RATING: DC30V 1.0A
2.MECHANICAL LIFE: 5,000 CYCLES.
3.PACKAGING: 1000PCS/REEL

③	Shell	—	1	Copper Alloy	Ag Plated	—
②	Contact	—	5	Phosphor Bronze	Au Plated	—
①	Housing	—	1	LCP	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS	DATE	HROELECTRONICS CO.,LTD				
DRAWN JKUN.LU	2015/6/17	ELECTRONICS CO.,LTD				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	30~12.7 ±0.30	ANGLE	PART NO.	SCALE: 1:1	PROJ. 1 OF 1
A	—	—	NEW	—	—	—	10~30 ±0.25	5~10 ±0.20	±2°	U-F-M5SS-W-2	—	—