

## BEAGLEBOARD-X15 REV C

### Quick Start Guide

Rev 0.1

July 2017

## CONTENTS

What's the in the box .....	3
TOP EDGE AND BOTTOM SIDE.....	4
TOP SIDE AND BOTTOM EDGE.....	5
MAJOR COMPONENTS .....	6
Check It Out.....	7
WHAT YOU WILL NEED .....	7
SETUP INSTRUCTIONS.....	10
PLUG IN YOUR CABLES .....	11
ETHERNET .....	11
HDMI.....	11
eSATA.....	11
KEYBOARD AND MOUSE .....	12
AUDIO .....	12
micro sd card .....	12
SERIAL DEBUG.....	13
TERMINAL SETUP.....	13
PLUG in POWER .....	13
POWER LEDS.....	14
Turn on Hd monitor .....	14
TURN ON X15 POWER.....	15
BOOTING.....	15
USER LEDS.....	15
TESTING .....	17
DEBUG:.....	17
ETHERNET .....	18
SPEAKERS.....	19
eSATA.....	21
POWER ON and RESET .....	22
FAN .....	23

## TABLE OF FIGURES

Figure 1 – X15 Box Contents.....	3
Figure 3 – X15 Side View of Top Edge.....	4
Figure 4 – Bottom side of X15 .....	4
Figure 5 – TOP Side of X15 Major Interfaces .....	5
Figure 6 – X15 Side View Bottom Edge.....	5
Figure 7 - Locations of major ICs on the X15 .....	6
Figure 8 - Desktop Configuration.....	10
Figure 9 - ETHERNET PORTS.....	11
Figure 10 – HDMI PORT .....	11
Figure 12 – Keyboard Transmitter .....	12
Figure 13 – AUDIO JACKS .....	12
Figure 14 – micro SD CAGE .....	12
Figure 15 – SERIAL DEBUG PORT .....	13
Figure 16 – TERMINAL WINDOW.....	13
Figure 20 – MONITOR POWER BUTTON .....	14
Figure 21 – POWER LEDs .....	15
Figure 22 – POWER LEDs .....	15
Figure 23 – POWER LEDs .....	15
Figure 24 - Complete X15 system ready for test .....	16
Figure 25 - Terminal activity on the Tera Term .....	17
Figure 26 - Debian Desktop .....	18
Figure 27 - Open Web Browser .....	18
Figure 28 - Browser opens to the home page .....	19
Figure 30 - Media Inserted window.....	20
Figure 31 - Open and Play sound file .....	20
Figure 32 - Debian Volume adjustment.....	21
Figure 33 - Plug in eSATA cable and SSD.....	22
Figure 34 - Attached drives show up in Debian pop-up window.....	22
Figure 35 - Powering OFF using the shutdown command .....	23
Figure 36 - The RESET Button P2 .....	23
Figure 37 - Polarity details for Fan connector .....	25

## WHAT'S THE IN THE BOX

In the box you will find a BEAGLEBOARD-X15 board inside an ESD bag.

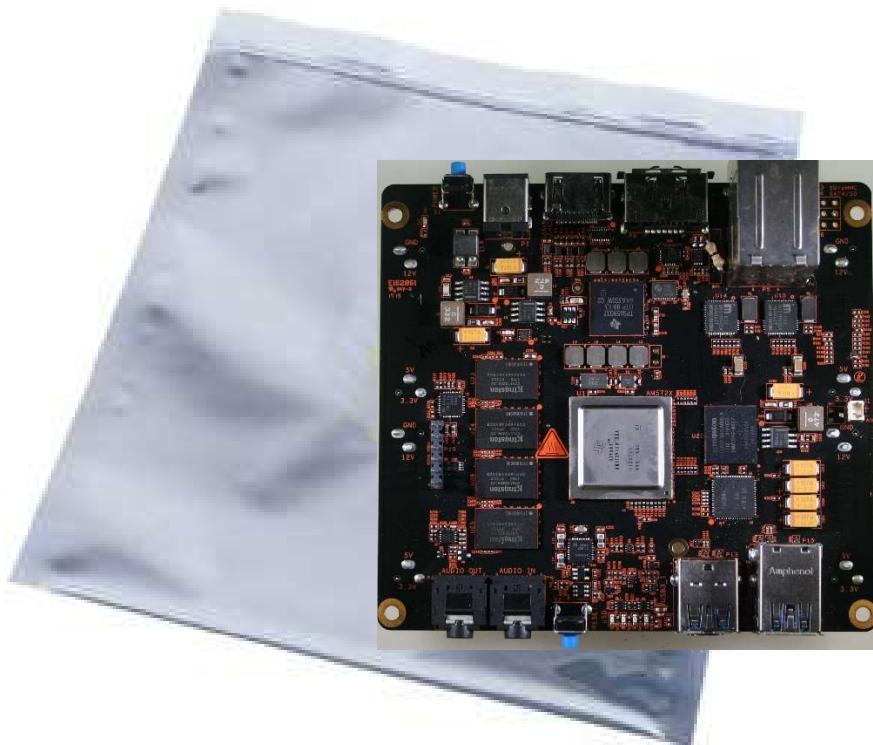


Figure 1 – BEAGLEBOARD-X15 Box Contents

### TOP EDGE AND BOTTOM SIDE

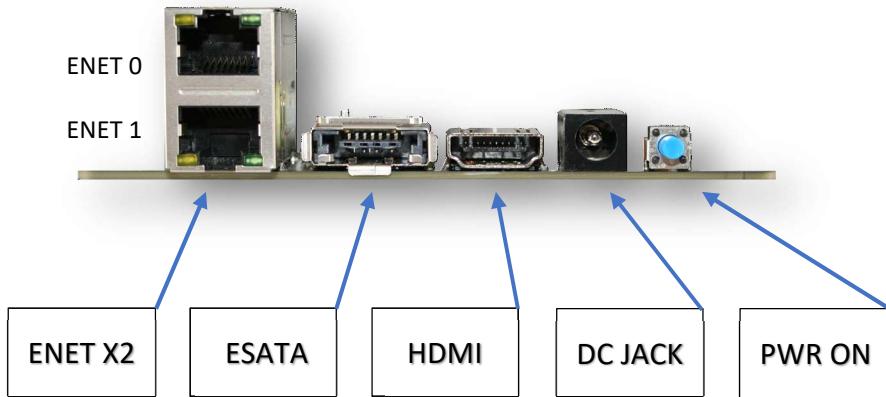


Figure 1 – BEAGLEBOARD-X15 Side View of Top Edge

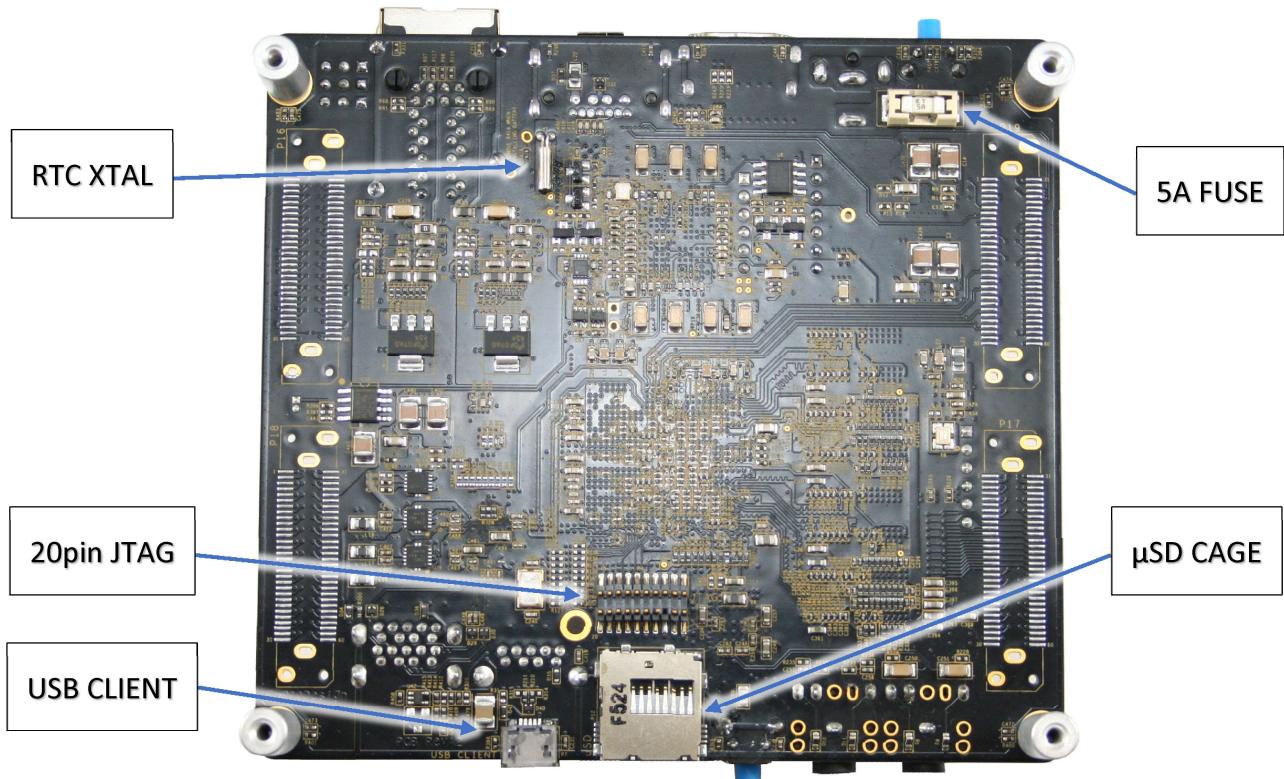


Figure 2 – Bottom side of BEAGLEBOARD-X15

## TOP SIDE AND BOTTOM EDGE

Figure 5 shows the edge connectors and the on-board headers and optional devices

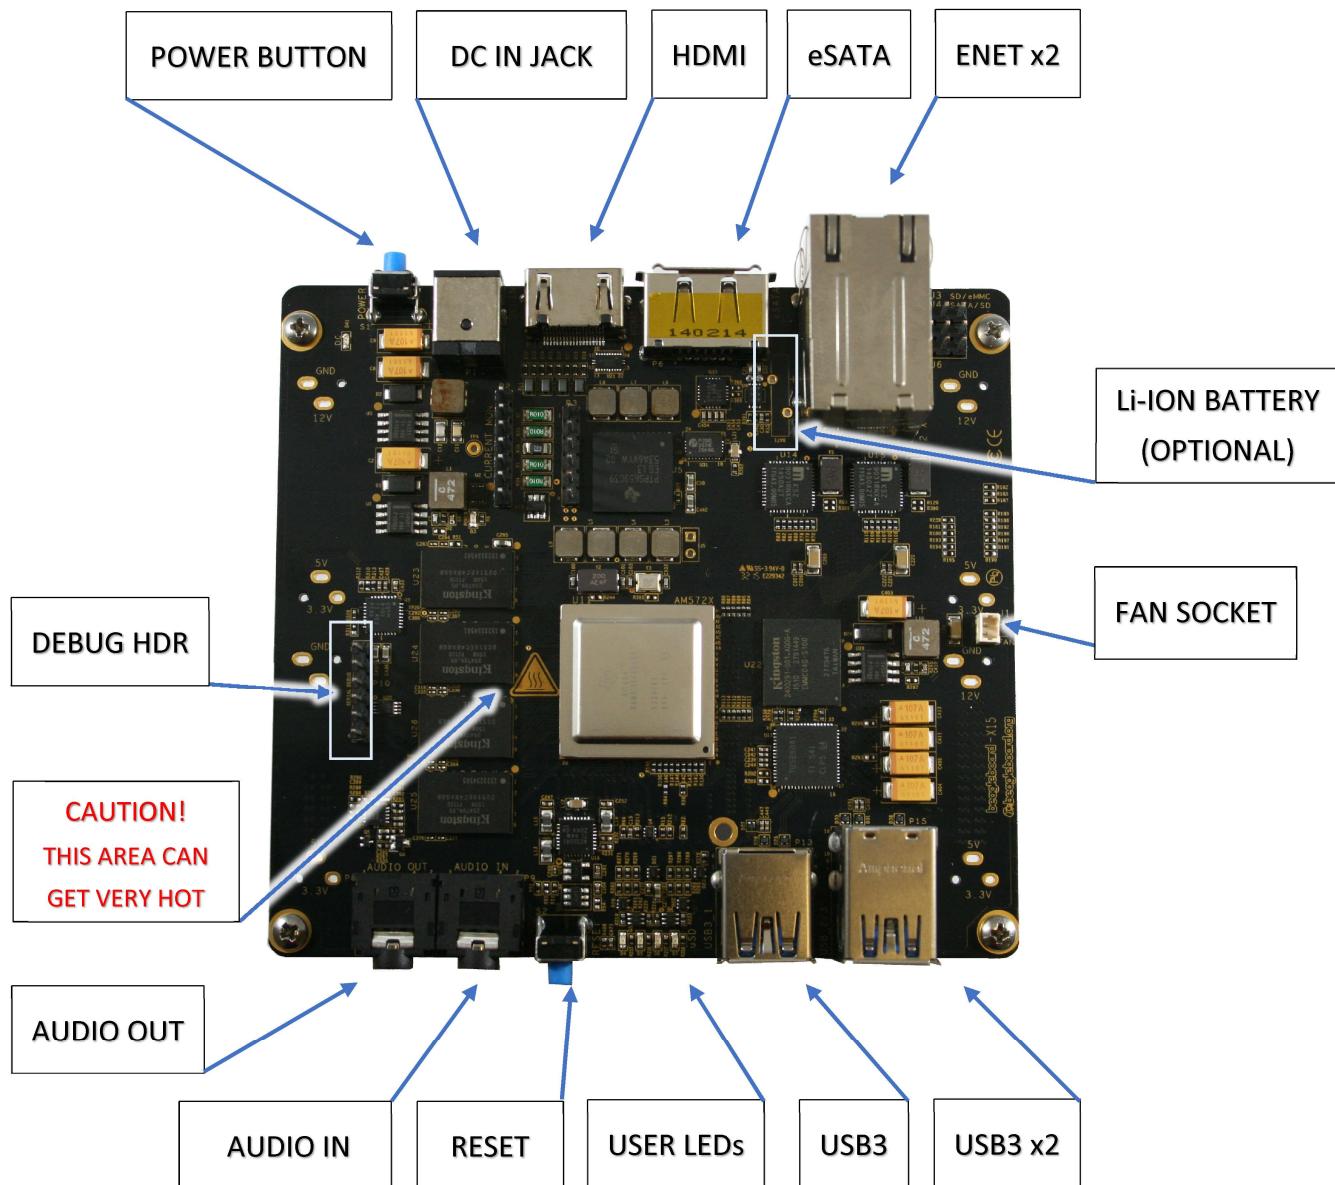


Figure 3 – TOP Side of BEAGLEBOARD-X15 Major Interfaces

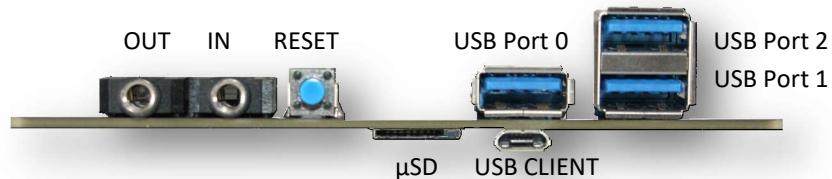


Figure 4 – BEAGLEBOARD-X15 Side View Bottom Edge

## MAJOR COMPONENTS

Figure 5 shows the major IC and components on the BEAGLEBOARD-X15.

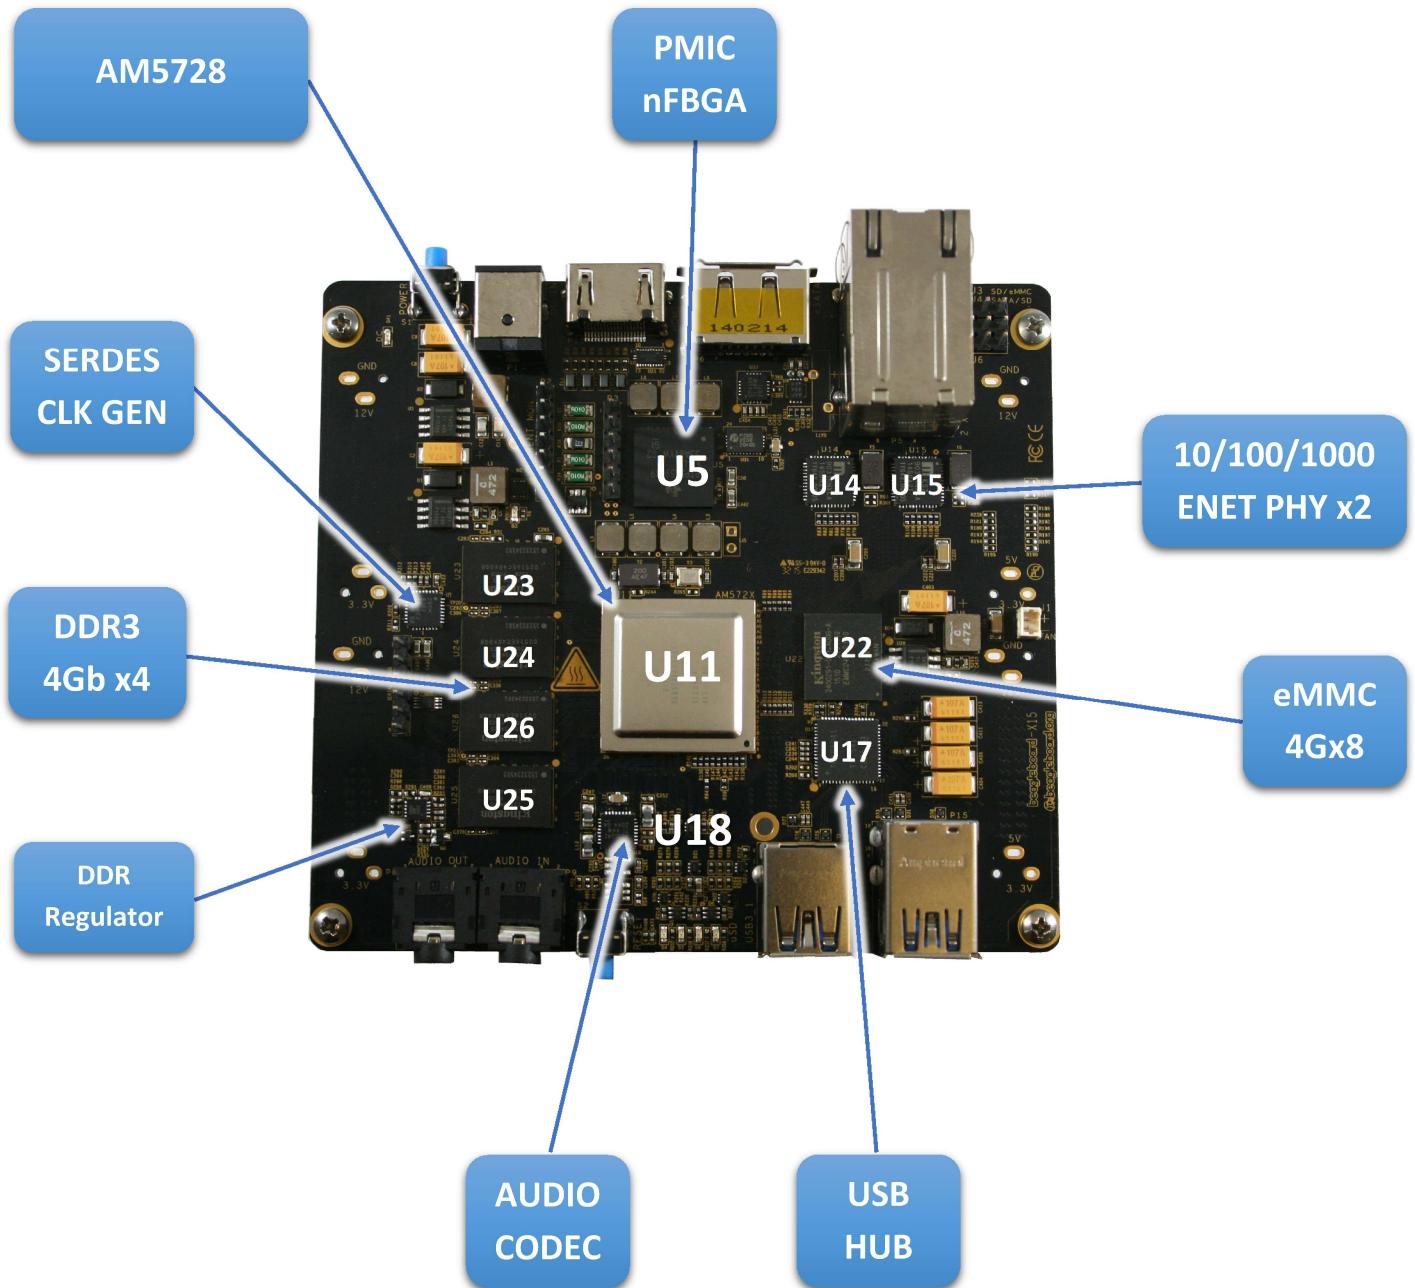


Figure 5 - Locations of major ICs on the BEAGLEBOARD-X15

## CHECK IT OUT

### WHAT YOU WILL NEED

**Table 1** shows the accessories needed to test all BEAGLEBOARD-X15 peripherals. Some of these items may need to be purchased if the user does not already own them. For power supply and serial cables please observe power requirements when purchasing. The power jack on the BEAGLEBOARD-X15 accepts a 2.5mm barrel to differentiate it from other board supplies.

Table 1 – LIST OF NEEDED ACCESSORIES

<b>DC POWER SUPPLY</b> <ul style="list-style-type: none"><li>• 12V Supply</li><li>• 60W (5A min)</li><li>• 2.5mm x 5.5mm Barrel Plug Size</li><li>• Option 1: <a href="#">TRG70A120</a></li><li>• Option 2: <a href="#">VEF65US12</a></li><li>• Option 3: <a href="#">CENB1060A1203F01</a></li><li>• Option 4: <a href="#">TRG70A120-02E01</a></li><li>• Option 5: <a href="#">PSAC60M-120</a> (needs adapter below)</li></ul>	
<b>2.5mm ADAPTER</b> <ul style="list-style-type: none"><li>• Needed only for 12V supplies that have 2.1mm plug</li><li>• Can be purchased online</li><li>• One such source: <a href="http://www.newark.com/multicomp/c4074/2-5mm-dc-socket-to-2-1mm-dc-plug/dp/71T9782">http://www.newark.com/multicomp/c4074/2-5mm-dc-socket-to-2-1mm-dc-plug/dp/71T9782</a></li></ul>	
<b>TTL TO USB SERIAL CABLE</b> <ul style="list-style-type: none"><li>• 3.3V USB to SERIAL</li><li>• Can be purchased from various sources</li><li>• One such cable can be purchased here: <a href="http://www.digikey.com/product-detail/en/TTL-232R-3V3/768-1015-ND/1836393">http://www.digikey.com/product-detail/en/TTL-232R-3V3/768-1015-ND/1836393</a></li></ul>	
<b>HDMI AUDIO-VIDEO CABLE</b> <ul style="list-style-type: none"><li>• Off the shelf quality Cable</li><li>• HDMI-A Male to HDMI-A Male</li><li>• Preferably 3ft or longer</li></ul>	

<b>ETHERNET CABLE</b> <ul style="list-style-type: none"><li>• Two cables needed if both interfaces used</li><li>• Use Cat5e cables</li><li>• ENET PHYs have Auto MDI/MDI-x</li><li>• Crossover or straight cables can be used</li></ul>	
<b>AUDIO CABLE</b> <ul style="list-style-type: none"><li>• 3.5mm jacks on both ends</li><li>• Need two if Speakers do not come with one</li></ul>	
<b>SPEAKERS</b> <ul style="list-style-type: none"><li>• Any desktop speaker system</li><li>• With 3.5mm cable</li></ul>	
<b>HDMI MONITOR</b> <ul style="list-style-type: none"><li>• HD monitor capable of 1080P</li><li>• With integrated audio</li><li>• Or Output jack for Audio</li></ul>	
<b>MICRO SD CARD</b> <ul style="list-style-type: none"><li>• 4GB to 16GB</li><li>• Class 10</li><li>• Standard Adapter</li></ul>	
<b>eSATA ADAPTER CABLE</b> <ul style="list-style-type: none"><li>• eSATA to SATA cable</li><li>• Combo cable</li></ul>	
<b>SATA DRIVE</b> <ul style="list-style-type: none"><li>• SATA HDD - Hard Disk Drive</li><li>• SATA SSD - Solid State Drive</li></ul>	

<p><b>USB THUMB DRIVE</b></p> <ul style="list-style-type: none"> <li>• USB3.0 thumb drive</li> <li>• Needed for file storage</li> <li>• Or to boot from USB3</li> </ul>	
<p><b>WIRELESS KEYBOARD/MOUSE</b></p> <ul style="list-style-type: none"> <li>• Wireless combo will save USB ports used</li> <li>• Less wire clutter</li> </ul>	

Besides the accessories mentioned it is assumed the user has a PC or Laptop running Linux or Windows.

## SETUP INSTRUCTIONS

### Standalone w/Display and Keyboard/Mouse

In this configuration, the board works more like a PC, totally free from any connection to a PC as shown in **Figure 8**. It allows you to create your code to make the board do whatever you need it to do. It will however require certain common PC accessories. These accessories and instructions are described in the following section

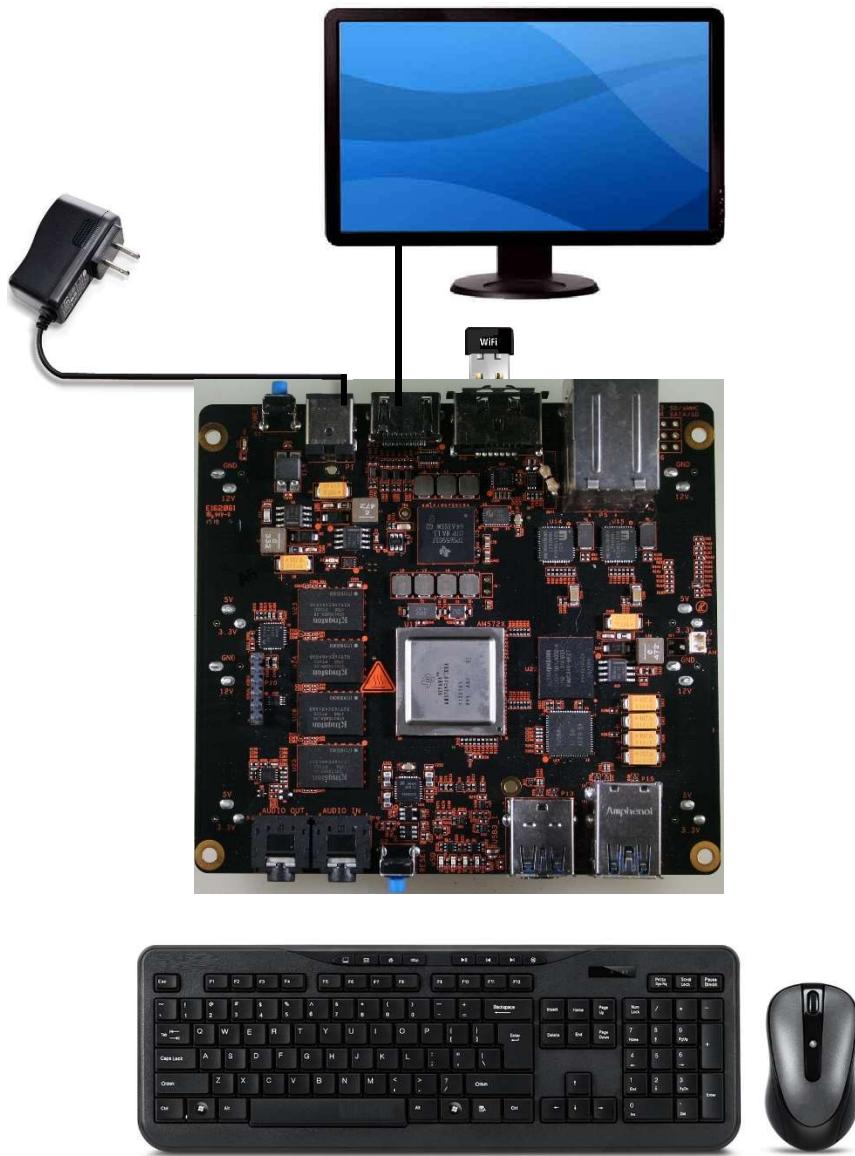



Figure 6 - Desktop Configuration

Additionally an Ethernet cable can be connected for network access.

## PLUG IN YOUR CABLES

### ETHERNET

There are two ports on the Ethernet connector on BEAGLEBOARD-X15. Plug cable into either port. Notice the orientation of cable insertion between the two ports in [Figure 9](#).

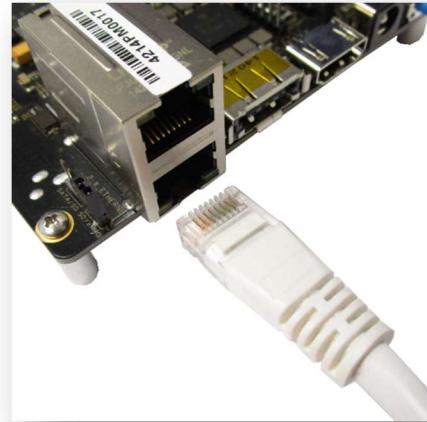

[Figure 7 - ETHERNET PORTS](#)

### HDMI

Plug in HDMI cable into P11 HDMI connector on the top edge of the BEAGLEBOARD-X15 board.



[Figure 8 – HDMI PORT](#)

### eSATA

Plug in eSATA cable as shown in [Figure 10](#).



[Figure 10 –eSATA PORT](#)

---

## KEYBOARD AND MOUSE

To avoid using up multiple USB ports a Wireless keyboard and mouse combination is preferred. The transceiver can be installed in either USB port including P6 eSATA connector.

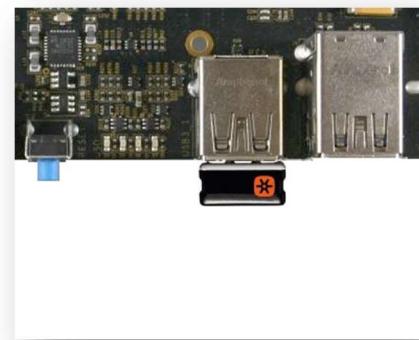


Figure 9 – Keyboard Transmitter

---

## AUDIO

To playback and record audio, insert speaker cable into Audio OUT jack of the BEAGLEBOARD-X15 and an audio source into the Audio IN jack.

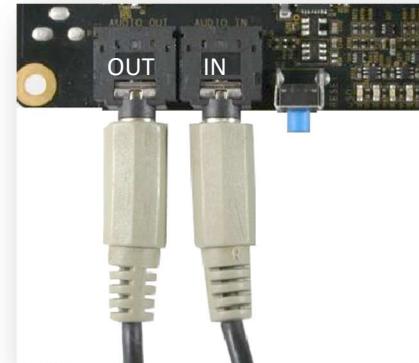


Figure 10 – AUDIO JACKS

---

## MICRO SD CARD

On the bottom edge of the BEAGLEBOARD-X15 board, on the bottom side is the micro SD card cage. I booting from SD card the micro SD card is inserted as shown in Figure 14 with the top side facing up.



Figure 11 – micro SD CAGE

## SERIAL DEBUG

Plug in the USB to Serial cable into the 6 pin header P10. Observe correct orientation. Pin1 is located at the top side of the header.

PIN NUMBER	SIGNAL
1	Ground
4	Receive
5	Transmit

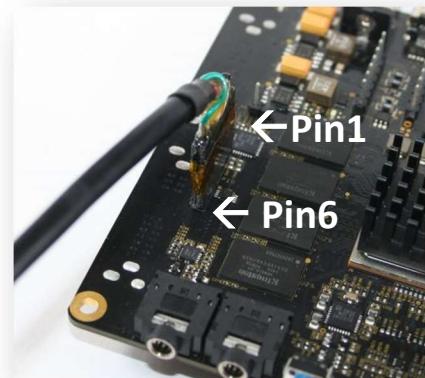


Figure 125 – SERIAL DEBUG PORT

## TERMINAL SETUP

Plug the USB end into your PC or Laptop and invoke **MINICOM** or **TERATERM** or your favorite Terminal emulator program. The settings for serial communications are:

Baud rate:	115200
Data:	8 bit
Parity:	none
Stop:	1 bit
Flow control:	none

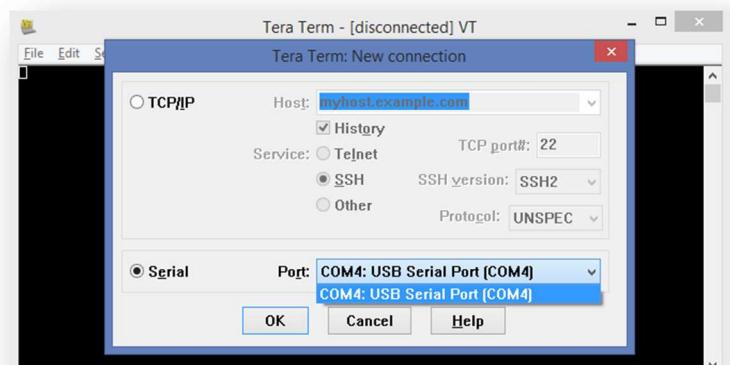


Figure 136 – TERMINAL WINDOW

## PLUG IN POWER

Once all the needed cables are inserted, plug in the DC power adapter into the P1 jack. This is a 2.5mm center contact and requires a supply that comes with a 2.5mm jack or an adapter to 2.5mm. See **Table 1** for more info.



Figure 17 – DC IN JACK P1

---

## POWER LEDS

Once the power plug is inserted in P1, the Power LED D41 will light up.

D41 - 12V Present LED

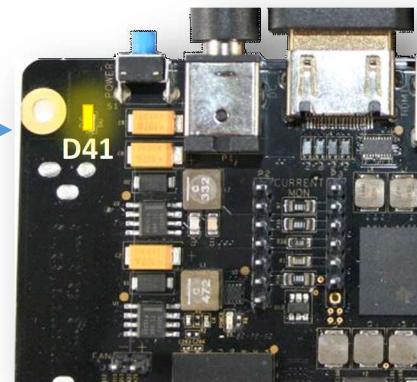


Figure 19 – DC 12V LED

---

## TURN ON HD MONITOR

Once power is connected, turn on HDMI monitor. Change input to the HDMI port the BEAGLEBOARD-X15 is connected to.



Figure 14 – MONITOR POWER BUTTON

---

## TURN ON BEAGLEBOARD-X15 POWER

Though power is plugged in and the terminal is connected there will be no activity observed on the terminal. LED D41 will glow.

D41 - 12V Present LED

To turn ON the BEAGLEBOARD-X15 main power press the blue momentary switch S1. This will cause LED D3 to glow showing that the board power is ON.

D3 - POWER ON LED


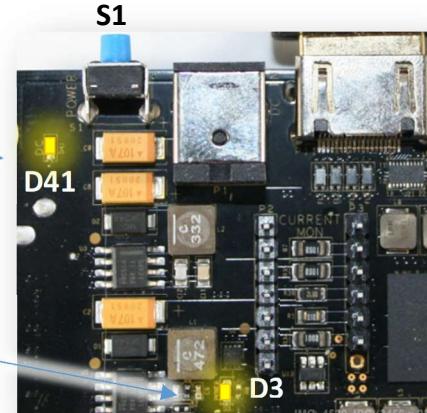


Figure 15 – POWER LEDs

---

## BOOTING

At this point the software present in eMMC will start to boot and activity can be seen on the terminal.

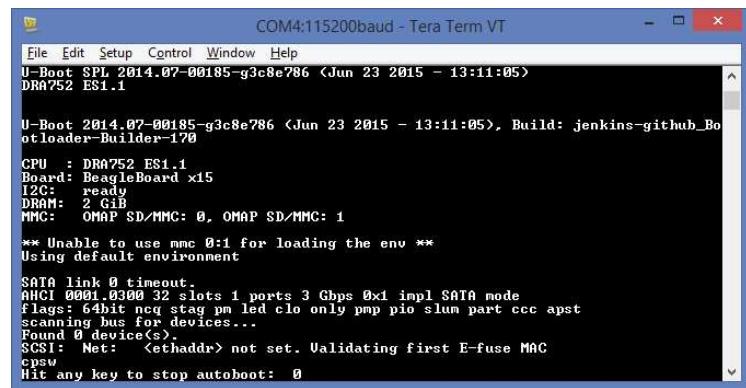

```
File Edit Setup Control Window Help
U-Boot SPL 2014.07-00185-g3c8e786 (Jun 23 2015 - 13:11:05)
DRA752 ES1.1

U-Boot 2014.07-00185-g3c8e786 (Jun 23 2015 - 13:11:05), Build: jenkins-github_B
otloader-Builder-120
CPU : DRA752 ES1.1
Board: BeagleBoard x15
I2C: ready
DRAM: 2 GiB
MMC: OMAP SD/MMC: 0, OMAP SD/MMC: 1
** Unable to use mmc 0:1 for loading the env ***
Using default environment

SATA link 0 timeout.
AHCI 0001.0300 32 slots 1 ports 3 Gbps 0x1 impl SATA mode
Flags: 64bit ncq stag pm led clo only pmp pio slum part ccc apst
scanning bus for devices...
Found 0 device(s).
SCSI: Net: <ethaddr> not set. Validating first E-fuse MAC
cpsw
Hit any key to stop autoboot: 0
```

Figure 16 – POWER LEDs

---

## USER LEDS

During the booting process the user may notice that the user LEDs will blink.

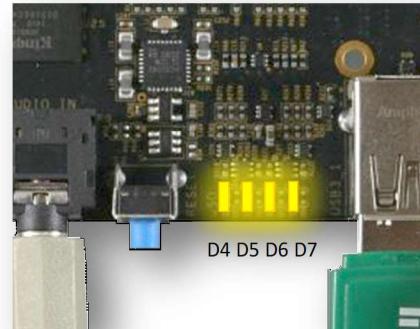


Figure 17 – POWER LEDs

Once the BEAGLEBOARD-X15 interfaces are connected your system is ready to test. The next section will go through what you can test.

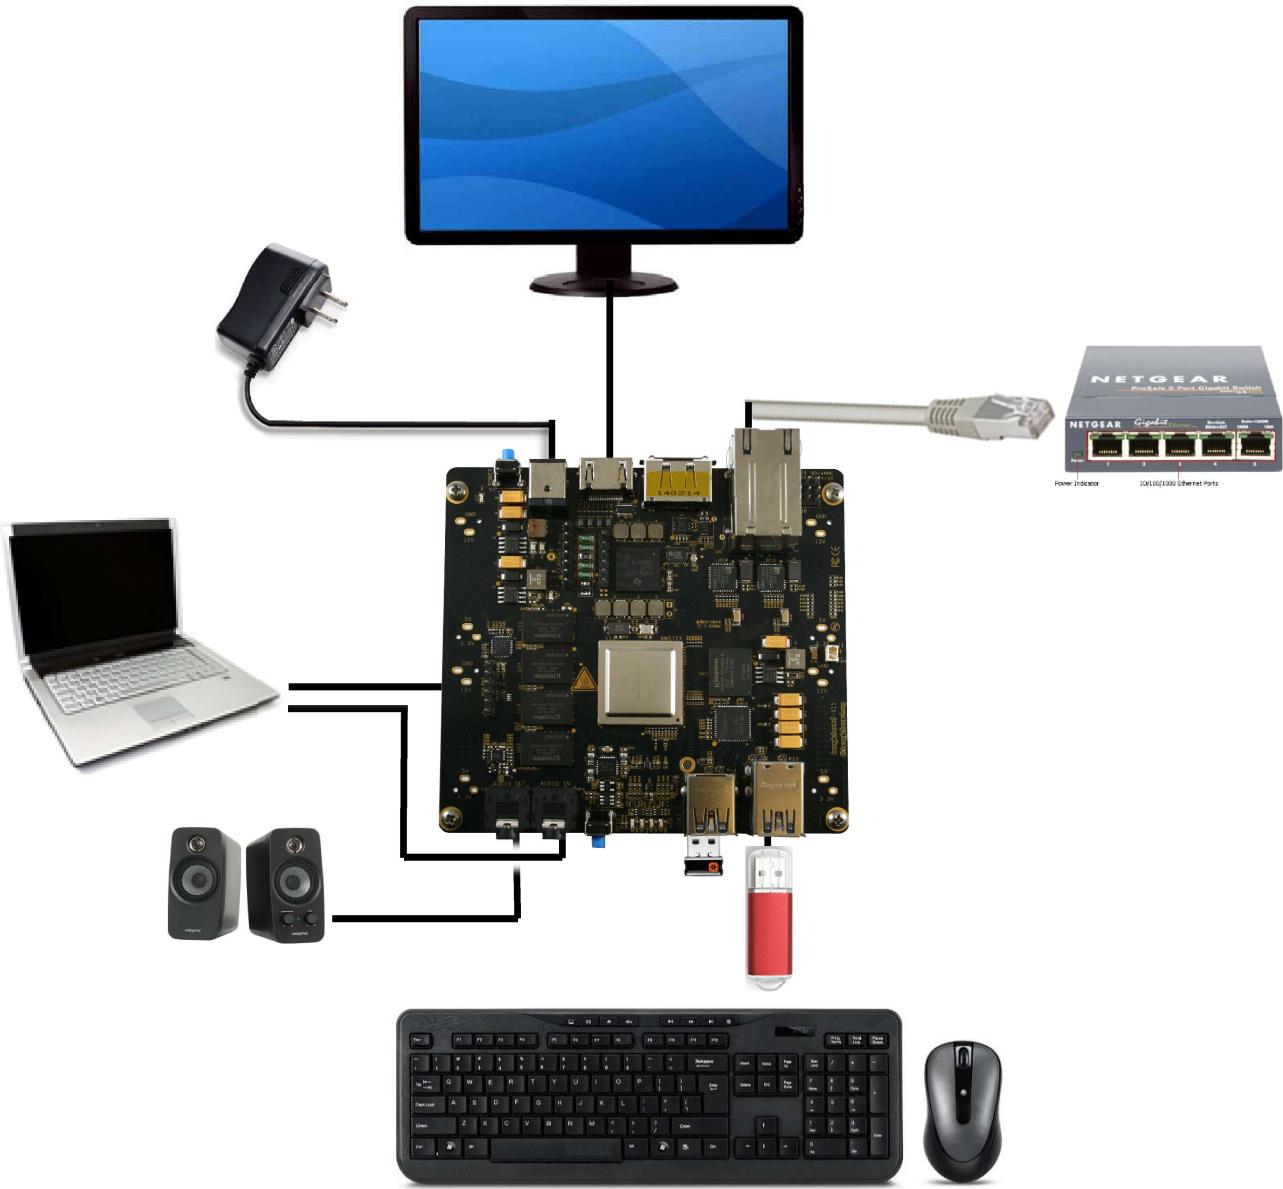


Figure 18 - Complete BEAGLEBOARD-X15 system ready for test

## TESTING

### DEBUG:

The Serial debug port on the processor is UART3 via a single 1x6 pin header. In order to use the interface a USB to TTL adapter will be required. The header is compatible with the one provided by FTDI and can be purchased from various sources. Signals supported are TX and RX. None of the handshake signals are supported. On the PC you will see activity that will take you to login prompt.

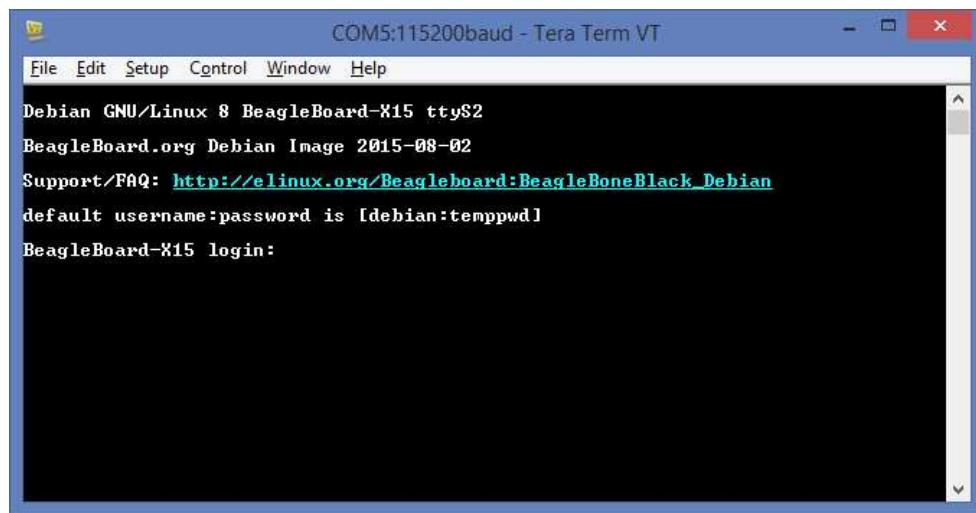


Figure 19 - Terminal activity on the Tera Term

A few seconds after the board power is turned on, the image in eMMC will boot and the Debian desktop will soon show up on the HDMI monitor.

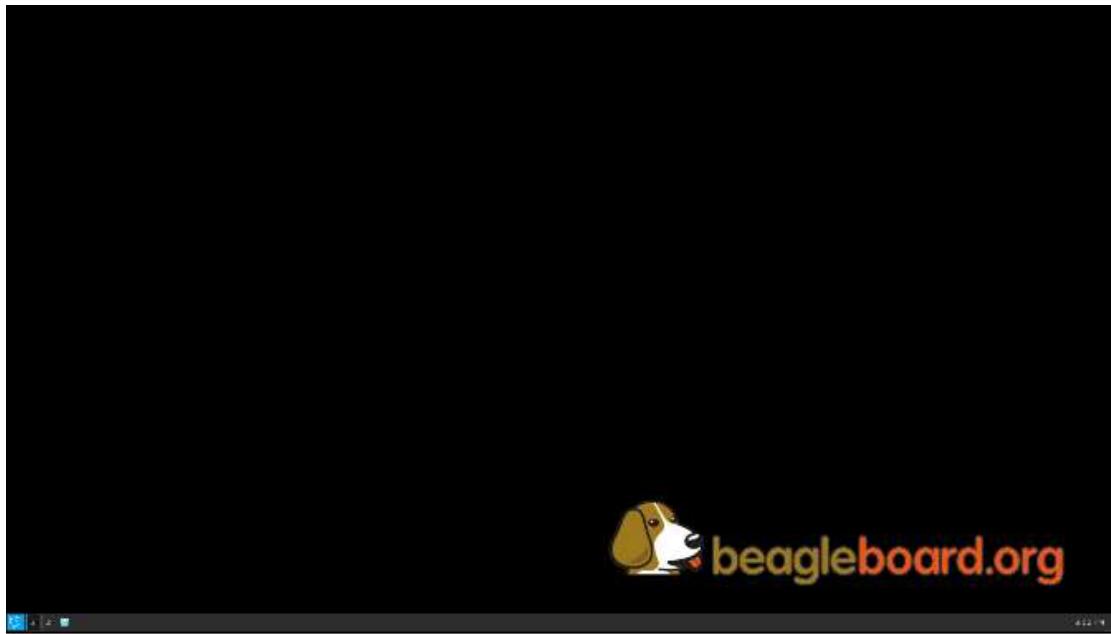


Figure 20 - Debian Desktop

---

## ETHERNET

Assuming the Ethernet cable is connected to one of the ENET ports on the BEAGLEBOARD-X15 a quick test can be performed by pointing the mouse to the bottom left corner of the Desktop and clicking the Debian menu logo. From here point to Internet → Chromium Browser.

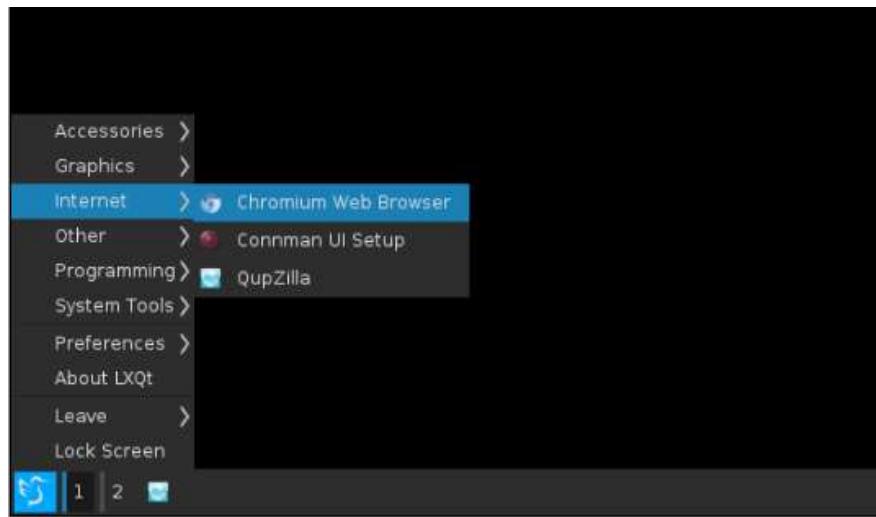


Figure 21 - Open Web Browser

The browser window will open and if there is an internet connection, the browser will go to the homepage.

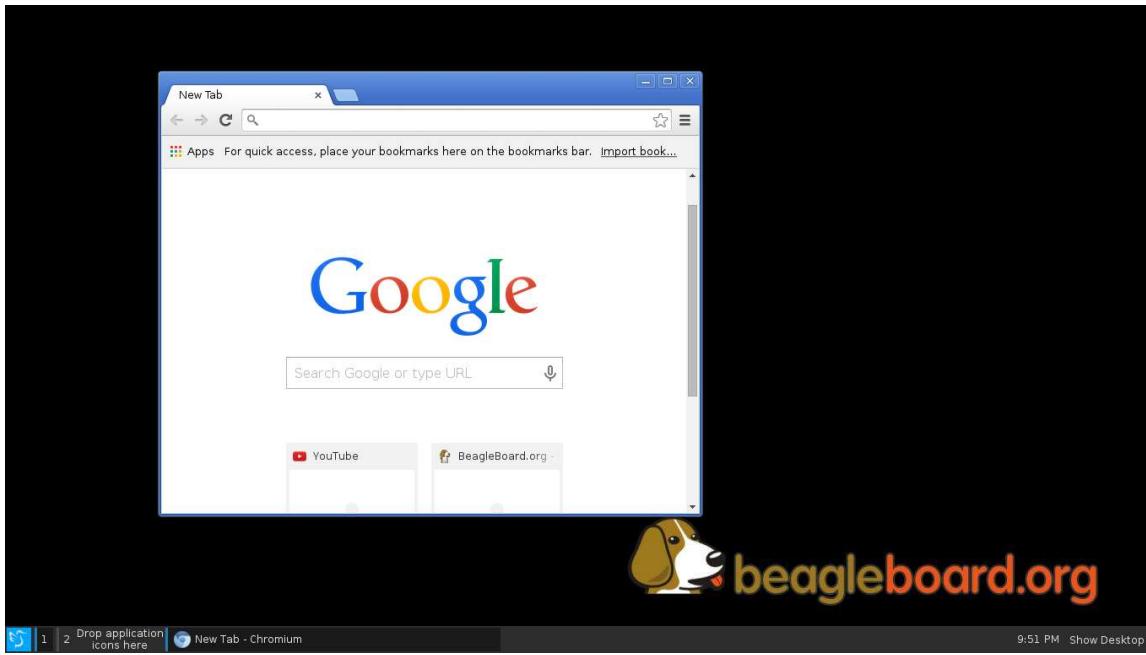


Figure 22 - Browser opens to the home page

The second Ethernet port can be similarly tested by moving the cable from ENET0 to ENET1. See **Figure 1**

---

#### SPEAKERS

To test the sound of your BEAGLEBOARD-X15 you can open a sound file or via file and play it back. In the example below, a simple file is played via the Chromium Web browser. Inserting a USB drive into the USB3.0 ports is one option.

On the Debian Desktop a window will pop-open and ask you if you want to see the contents of the newly installed flash drive. Also on the Tera Term console you can also read the logs associated with the insertion of the drive.

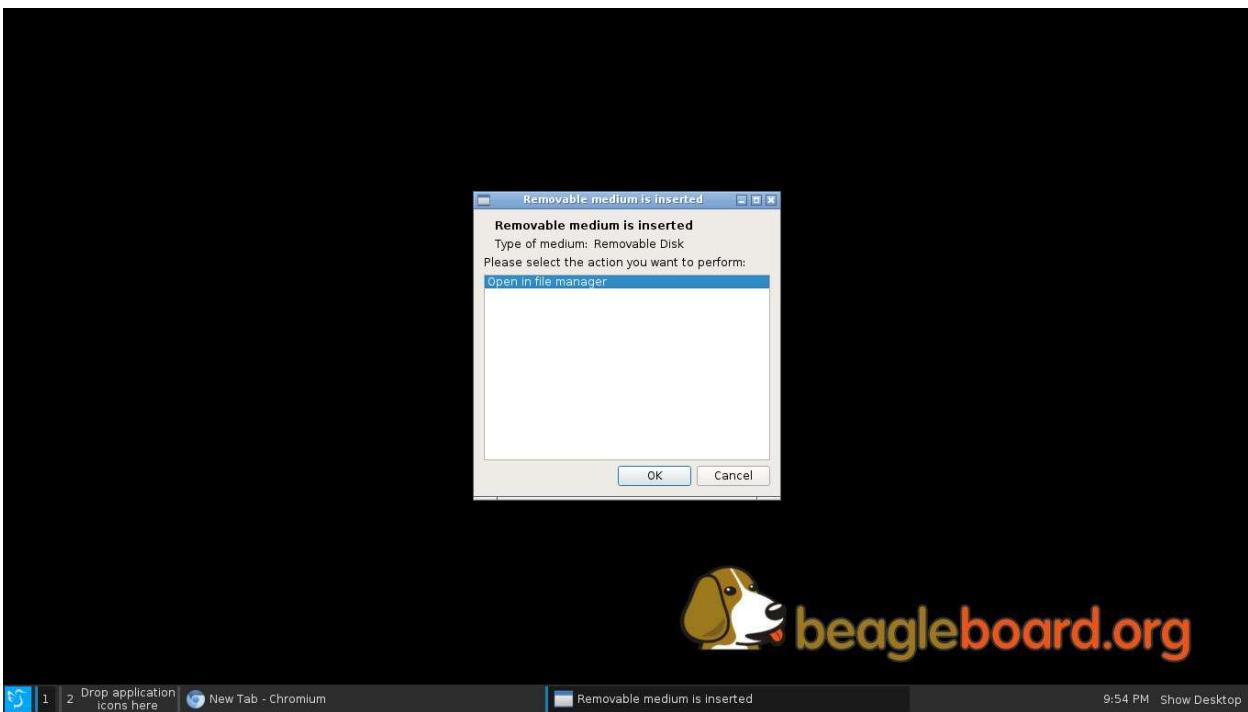


Figure 23 - Media Inserted window

Click 'Open in file Manager' to see the contents of the flash drive. Proceed to open the sound file. In case there is no music player installed yet, open the wav file with Chromium Brower. Then click play.


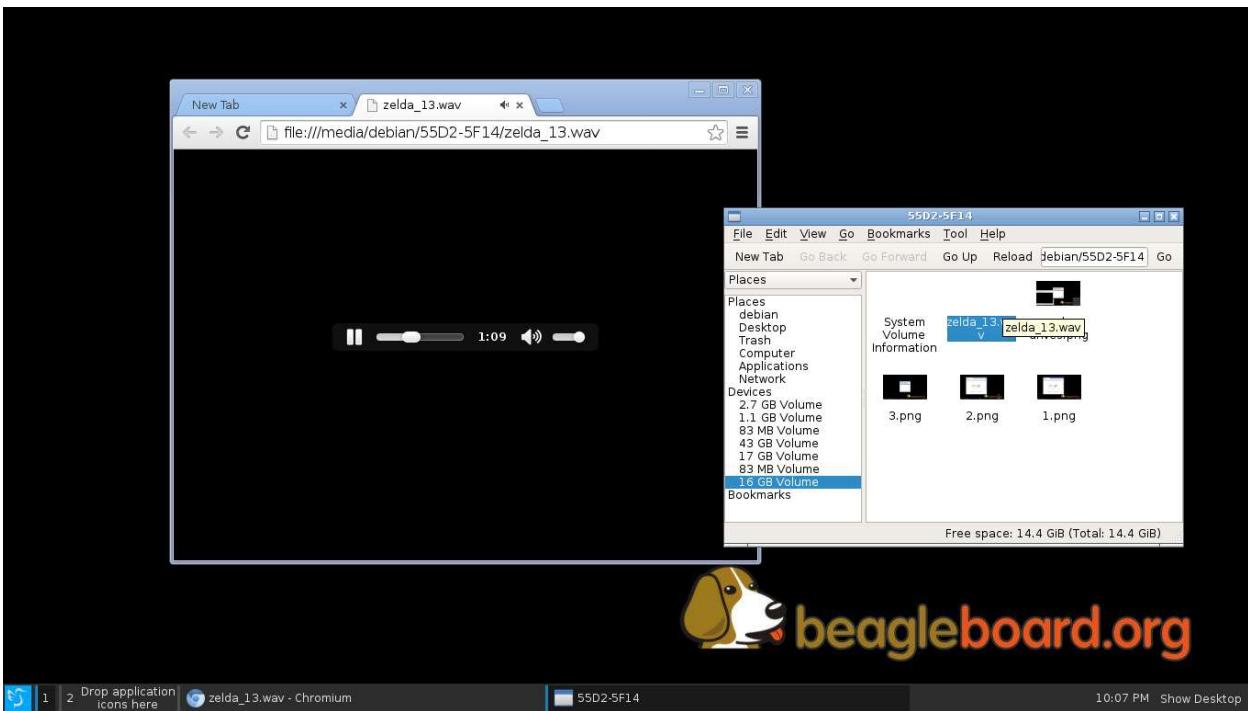


Figure 24 - Open and Play sound file

To adjust volume make sure your speakers are connected and the speaker volume is turned to a nominal volume. The BEAGLEBOARD-X15 volume can be adjusted by clicking on the lower right hand side left of the clock (icon missing in this example) and adjusting the volume lever up and down.

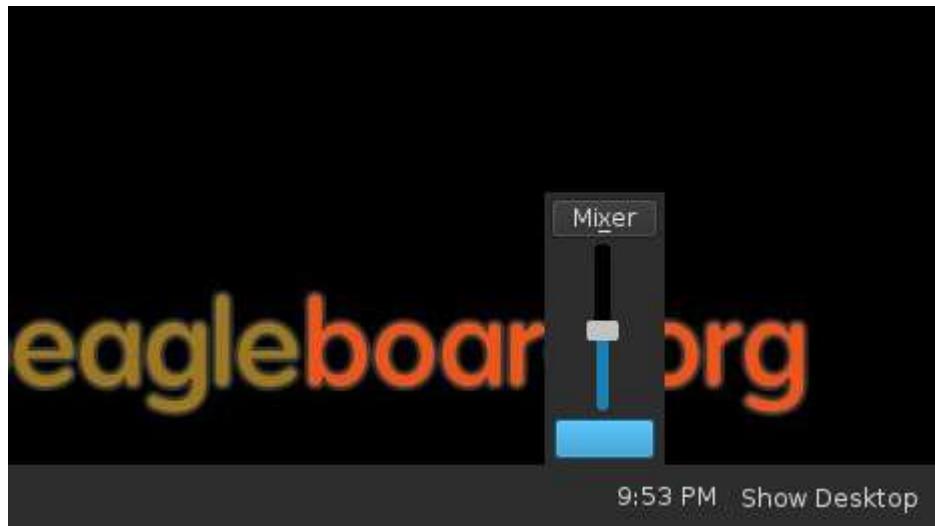

**Figure 25 -** Debian Volume adjustment

Audio In can be similarly tested by using a 3.5mm to 3.5mm audio cable between a PC playing a sound file and the BEAGLEBOARD-X15 recording it via connector jack P9.

---

#### ESATA

To test the eSATA interface you will need a cable and drive as described in **Table 1**. Simply plug in the cable into connector P6 and the drive will be detected. The connector also accepts a USB 2.0 flash drive or other USB 2.0 devices.



Figure 26 - Plug in eSATA cable and SSD

When plugged in the eSATA or USB will be listed on the Debian Desktop as shown below:

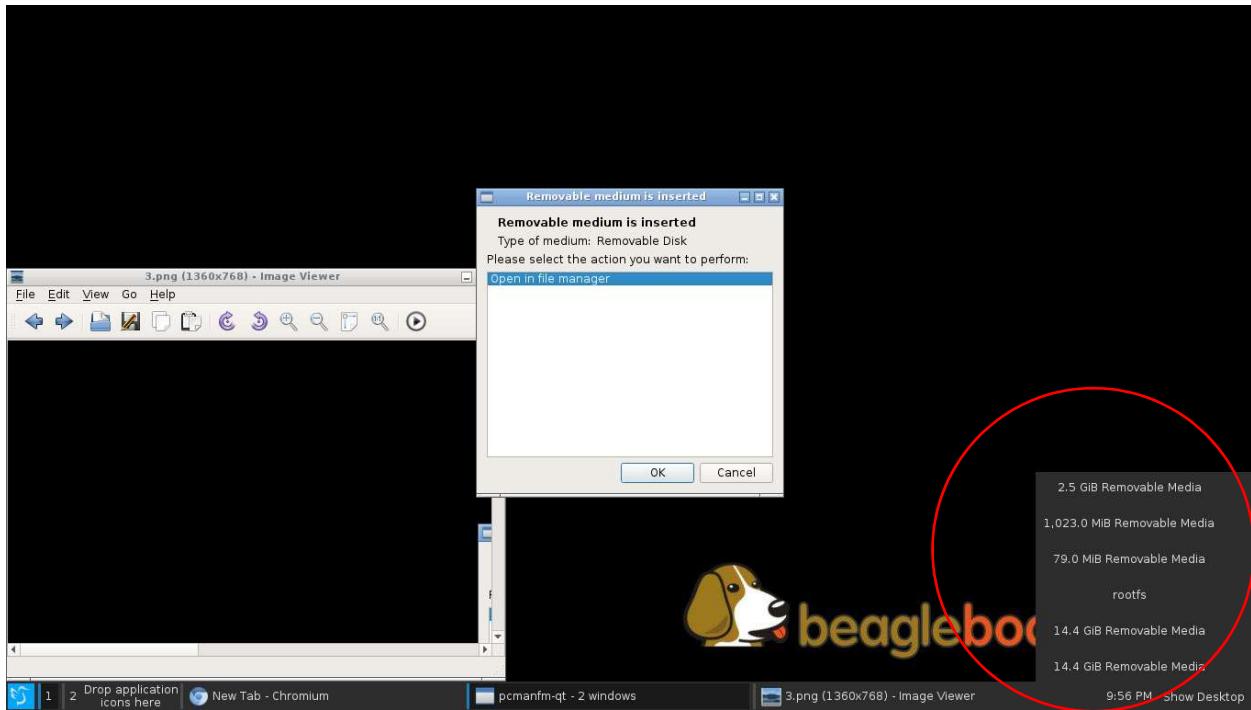



Figure 27 - Attached drives show up in Debian pop-up window

---

#### POWER ON AND RESET

To power OFF the board you can Press-and-Hold the power button for 12 seconds.

Another way to power off the board is to use the ‘shutdown’ command at the terminal prompt. The board will then start powering off.

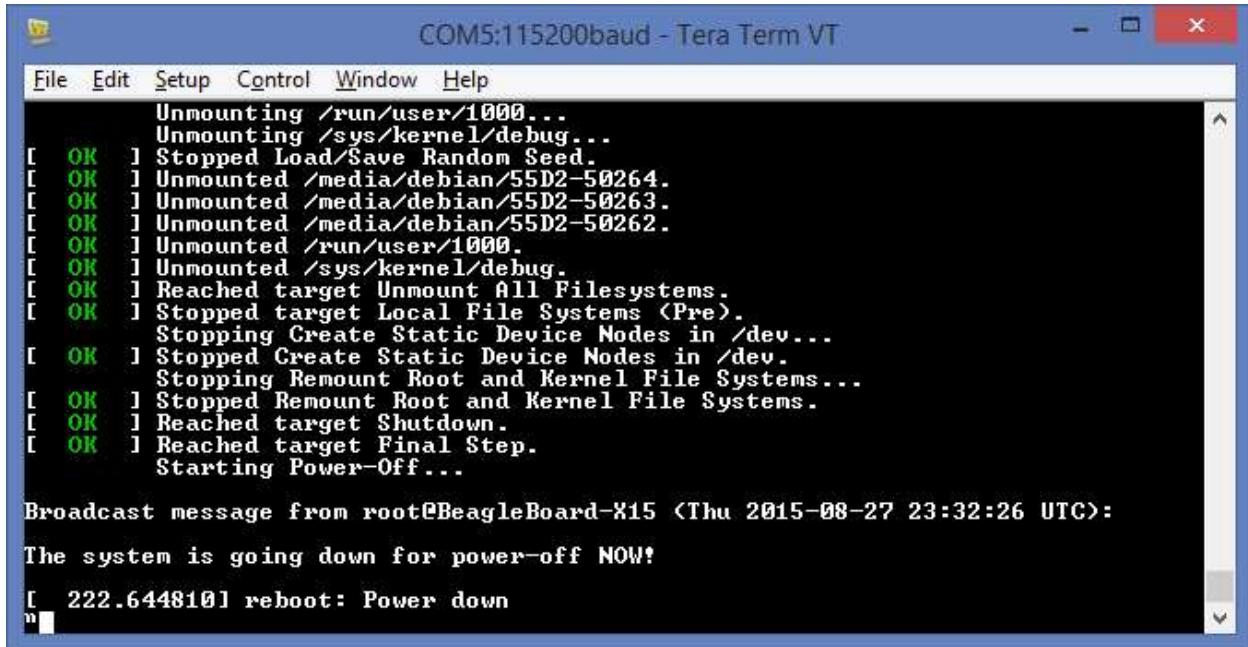

The screenshot shows a terminal window titled "COM5:115200baud - Tera Term VT". The window contains the following text:

```
Unmounting /run/user/1000...
Unmounting /sys/kernel/debug...
[ OK ] Stopped Load/Save Random Seed.
[ OK ] Unmounted /media/debian/55D2-50264.
[ OK ] Unmounted /media/debian/55D2-50263.
[ OK ] Unmounted /media/debian/55D2-50262.
[ OK ] Unmounted /run/user/1000.
[ OK ] Unmounted /sys/kernel/debug.
[ OK ] Reached target Unmount All Filesystems.
[ OK ] Stopped target Local File Systems (Pre).
Stopping Create Static Device Nodes in /dev...
[ OK ] Stopped Create Static Device Nodes in /dev.
Stopping Remount Root and Kernel File Systems...
[ OK ] Stopped Remount Root and Kernel File Systems.
[ OK ] Reached target Shutdown.
[ OK ] Reached target Final Step.
Starting Power-Off...

Broadcast message from root@BeagleBoard-X15 (Thu 2015-08-27 23:32:26 UTC):
The system is going down for power-off NOW!
[ 222.644810] reboot: Power down
```

Figure 28 - Powering OFF using the shutdown command

To **RESET** the board you can press the RESET button S2. Pressing once should reboot the board.




Figure 29 - The RESET Button P2

---

FAN

The BEAGLEBOARD-X15 does not come with a heatsink or fan installed but they can be added if required. The heatsink can be applied to the processor prior to sticking it onto the processor. The fan will connect to the socket located on the top side of the board, on the left edge as shown in **Figure 36**. **NOTE, under some conditions the area close to the processor can get very hot to touch. Observe cautions: SEE Figure 3.**

To install a fan you will need the following additional hardware:

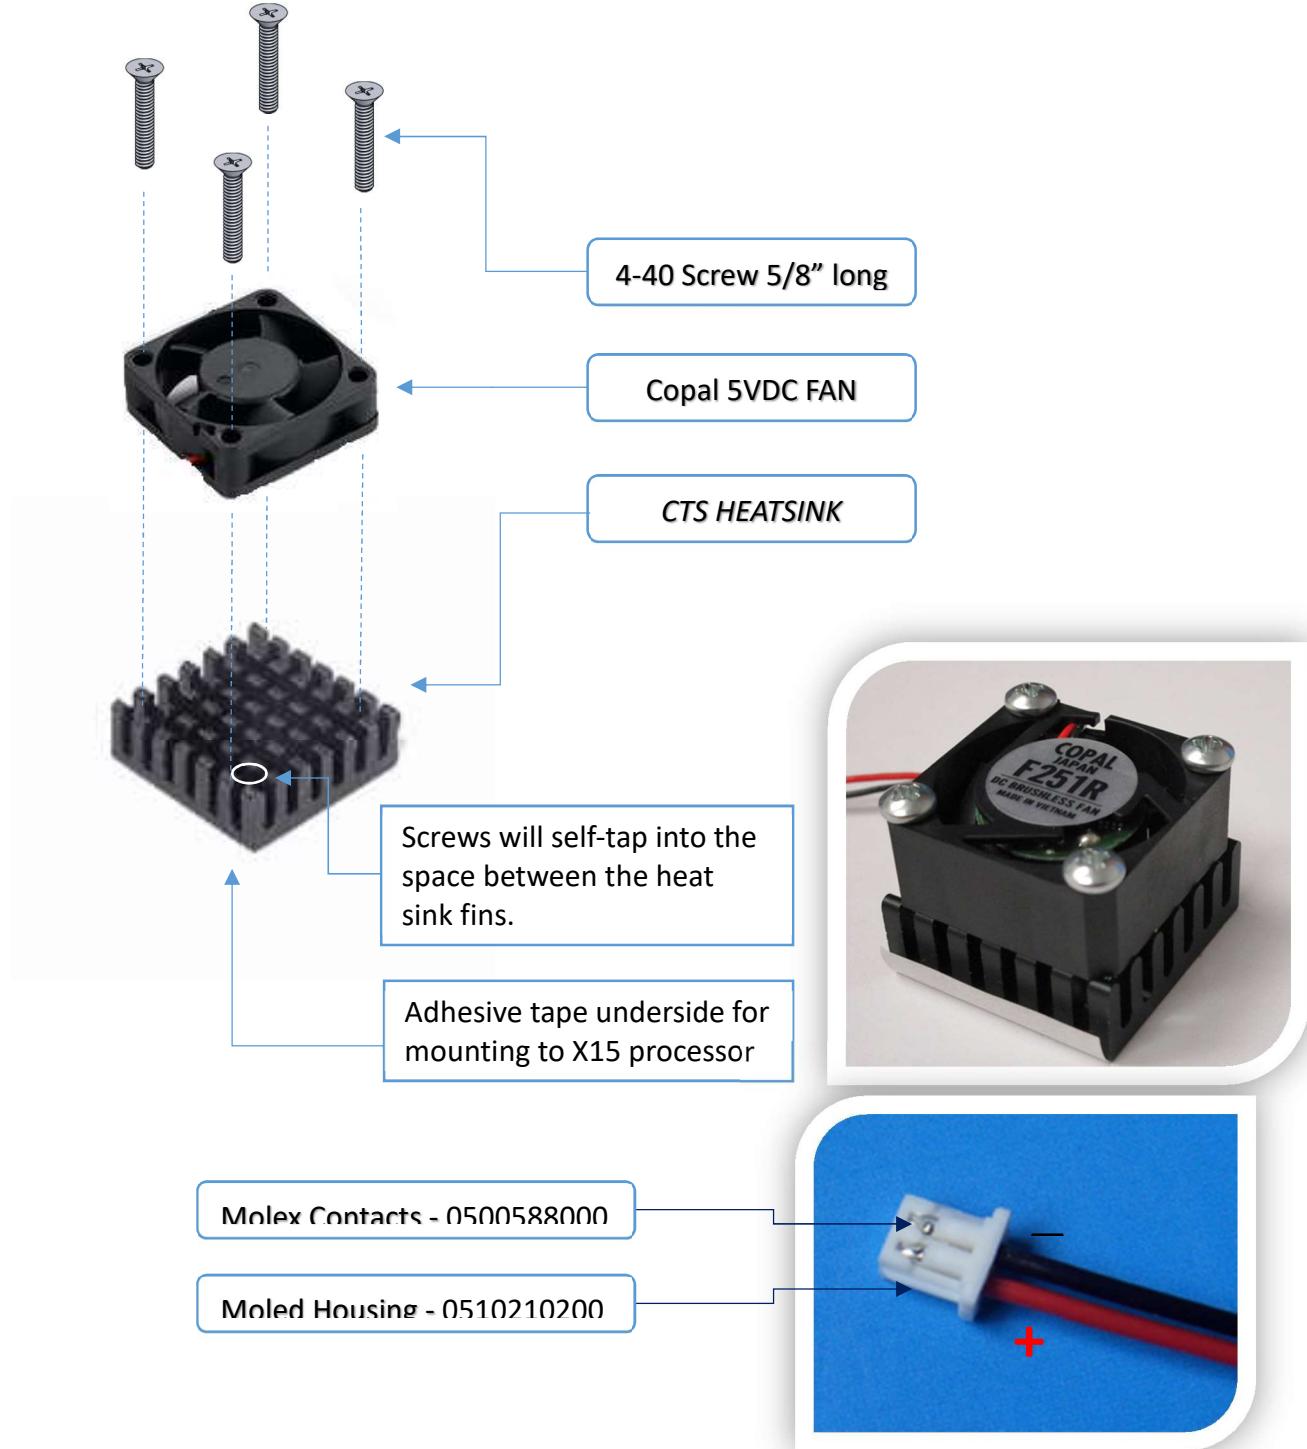

**Table 2** shows the parts list for the BEAGLEBOARD-X15 Heatsink and Fan Assembly.


**Table 2 – Heatsink and Fan Bill of Materials**

1	1	FAN	COPAL	F251R-05LB	FAN AXIAL 25X10MM 5VDC WIRE
2	4	Machine Screw	McMaster	96640A059	Box of 100 4-40 Flat head Machine screws 5/8" Black
3	1	Connector Housing	MOLEX	0510210200	CONN HOUSING 2POS 1.25MM NATURAL
4	2	Contact	MOLEX	0500588000	CONN TERM FEMALE 28-32AWG TIN
5	1	Heatsink	CTS Thermal Management	BDN10-3CB/A01	HEATSINK w/ADHESIVE CPU1.01" SQUARE

**Figure 6** shows the connection for the fan cable.

Connector Assembly Instructions:

Attention must be paid to the orientation of the crimped contact inside the plastic jacket. Follow insertion direction shown by the picture on the right. NEG (-) wire as shown on the previous page.

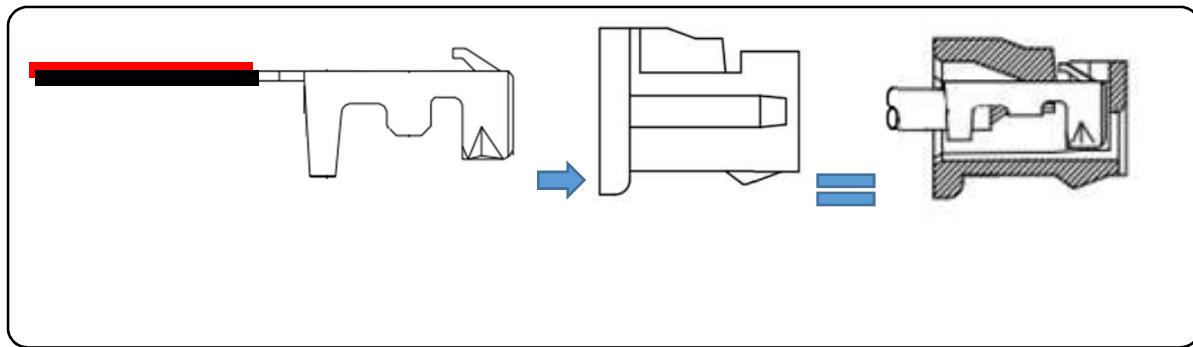

**Figure 30 - Polarity details for Fan connector**