JURALCO

JURALCO EDGETEC INFINITY® BALUSTRADE SYSTEM

ISSUE 2-25 v1

Producer statement cover sheet for Pool Fencing / Barrier

One cover sheet must be provided for each balustrade system

Auckland Council
Te Kaunihera o Tāmaki Makaurau

PART 1: TO BE COMPLETED BY THE DESIGN PROFESSIONAL / MANUFACTURER SUPPLYING THE GLASS SYSTEM

Cover sheet issued on behalf of:	Royal Glass
In respect of (system type):	Mini Post Glass Balustrade
Supplied to:	Auckland Council
Client / designers name:	
Description of work:	
Address of property:	

PART 2: CONSTRUCTION DETAILS *(tick boxes that apply)*

Deck / balcony / stairs construction:	☐ Timber	☐ Precast	☐ Concrete	☐ Steel	☐ *Please specify*

Maximum fall height:	< 1 (m)	**Note:** If barrier is not protecting a fall of more than 1.0m, barrier required to be designed for wind load only – no additional safety features required

PART 3: GLASS DETAILS *(tick boxes that apply)*

Type:	☐ Toughened	☐ Toughened laminated	☐ Toughened laminated with stiff interlayer

Thickness:	(mm)	Width of pane:	1.8 (m)
Height above floor:	(m)	Height above fixing:	(m)

Note: If barrier extends more than 1.2m above fixing point, test reports must be provided

Supplier:	

PART 4: BARRIER DETAILS

System name:	Mini Post Glass Balustrade
Drawings (ref page number)	
Engineers name:	Lautrec Technology Group
Hardware (type):	316 Stainless Steel

Drawings must show the type of hardware being used to support the glass (i.e. channel, discs, etc.)

PART 5: SAFETY FEATURES *(tick all boxes that apply; not required if fall height <1.0m)*	N/A ☐
	☐ Continuous interlinking rail (show how fixed to building and each pane of glass)
	☐ Continuous interlinking top cap (show how fixed to building and each pane of glass)
	☐ Clamps, brackets or point fixings (show how fixed to building and each pane of glass)
	☐ Framed with structural sealant min. 2 edges (show how fixed to building and each pane of glass)
	☐ Glass with stiff interlayer
	☐ Two or three glass edges supported by continuous clamps
	☐ Structural post to fix interlinking rail to deck
	☐ Other (specify)
Engineers name:	Lautrec Technology Group
Drawings (ref page number)	
Comments:	

PART 6: COVER SHEET COMPLETED BY	
Name:	Roxy Huang
Signature:	
Date:	
Contact number:	0800 769 254
Email:	info@royalglass.co.nz

NAME: Josh Harrison

ADDRESS:

DATE: 14/05/2025 **CONSENT AUTHORITY: Auckland Council**

THIS PS1 DOES NOT CONSTITUTE A SITE SPECIFIC REVIEW BY THE ENGINEERING COMPANY BELOW AND IS ONLY APPLICABLE FOR STANDARD FIXINGS AND DESIGN PARAMETERS AS DETAILED IN THE RELEVANT MANUAL

Building Code Clause(s) B1, F2, F4, F9

PRODUCER STATEMENT – PS1 – DESIGN

ISSUED BY: Lautrec Technology Group Limited
(Design Firm)

TO: Juralco Aluminium Building Products Limited
(Owner/Developer)

TO BE SUPPLIED TO: All Building Consent Authorities in NZ (Auckland Council Author Number: 1385)
(Building Consent Authority)

IN RESPECT OF: Juralco Edgetec® Infinity Balustrade System
(Description of Building Work)

AT: N/A (all locations within NZ Wind Zone)
(Address)

Town/City:.................. **LOT**.................. **DP**.................. **SO**..................
(Address)

We have been engaged by the owner/developer referred to above to provide:

Specific Engineering Design Structural Components Only
(Extent of Engagement)

services in respect of the requirements of Clause(s) B1, F2, F4, F9 of the Building Code for:

☐ All or ☒ Part only (as specified in the attachment to this statement), of the proposed building work.

The design carried out by us has been prepared in accordance with:

☒ Compliance Documents issued by the Ministry of Business, Innovation & Employment B1/VM1; AS/NZS 1170:2021; AS/NZS 1664.1:1997; NZS AS 1720.1:2022; NZS 3101:2006; NZS 3404:1997; NZS 4223.3:2016; NZS 4223.4:2008; NZS 8500:2016 or
(verification method/acceptable solution)

☐ Alternative solution as per the attached schedule.

The proposed building work covered by this producer statement is described on the report titled:
"PS1 Report - Juralco Edgetec® Infinity Balustrade System_27.02.25" together with product manual "Juralco Edgetec® Infinity Balustrade System Issue 2-25 v1";
together with the specification, and other documents set out in the schedule attached to this statement.

On behalf of the Design Firm, and subject to:
(i) Site verification of the following design assumptions assumed adequate support structure by others
(ii) All proprietary products meeting their performance specification requirements;

I believe on reasonable grounds that a) the building, if constructed in accordance with the drawings, specifications, and other documents provided or listed in the attached schedule, will comply with the relevant provisions of the Building Code and that b), the persons who have undertaken the design have the necessary competency to do so. I also recommend the following level of construction monitoring/observation:

☐ CM1 ☐ CM2 ☐ CM3 ☐ CM4 ☐ CM5 (Engineering Categories) or ☒ as per agreement with owner/developer (Architectural)

I, Kevin Brown am: ☒ CPEng # 140404
(Name of Design Professional)

I am a member of: ☒ Engineering New Zealand **and hold the following qualifications:** BE, CMEngNZ, CPEng, IntPE(NZ), MBA

The Design Firm issuing this statement holds a current policy of Professional Indemnity Insurance no less than $200,000*.
The Design Firm is a member of ACE New Zealand: ☒

SIGNED BY Kevin Brown (Signature)
(Name of Design Professional)

ON BEHALF OF Lautrec Technology Group Limited Date 27/02/2025
(Design Firm)

Note: This statement shall only be relied upon by the Building Consent Authority named above. Liability under this statement accrues to the Design Firm only. The total maximum amount of damages payable arising from this statement and all other statements provided to the Building Consent Authority in relation to this building work, whether in contract, tort or otherwise (including negligence), is limited to the sum of $200,000.*

This form is to accompany **Form 2 of the Building (Forms) Regulations 2004** for the application of a Building Consent.

Lautrec Technology Group Ltd.
Professional Consulting Engineers

LAUTREC
CONSULTING ENGINEERS

2/11/2024

To the Building Official,

B2 COMPLIANCE - JURALCO EDGE® BALUSTRADE SYSTEMS
at ***Residential occupancy type A, A other, and C3;*** at ***any location in New Zealand that falls within the scope of this PS1 - see supporting PS1 report for scope***

We have been asked to provide a PS1 for Clause B2 of the Building Code - Structural Durability

We are not able to provide this because there is no effective verification method for B2 contained within the New Zealand Building Code.

As these systems can be installed in a variety of settings, including internal and exposed environments, it is not deemed practical to specify durability requirements for the sub structure. Timber treatments, mild steel corrosion protection coatings, and concrete and masonry covers are therefore up to the building designer to specify in accordance with the relevant recognised standards.

However, we can confirm that for the structural elements shown in the attached documentation:

Material	Means of compliance	Details
Juralco Edge® Balustrade Systems - Aluminium and Stainless Steel	Alternative Solution	Stainless steel components conform to SS316. Aluminium extrusions, components, and hardware conform to 6060 T5. Non-structural cladding has a durability requirement not less than 50 years for this project. Note that the industry proven life of Aluminium, Stainless Steel, and Glass would satisfy a 50-year design life requirement. We note that this is on a time to first maintenance basis.
Connections - Stainless Steel fixings	Alternative Solution	All bolt and screw fixings within Juralco Edge® Balustrade Systems shall be minimum SS316. Non-structural fixings that are difficult to replace has a durability requirement not less than 50 years for this project. Note that the industry proven life of Stainless Steel would satisfy a 50-year design life requirement.

It is assumed that these structural elements are fixed to adequate structures by others.

Minor tea staining may occur in coastal environments. Refer to Juralco Edge® Balustrade Systems manual issue 10-24 v1 for the supplier's maintenance requirements.

Yours faithfully,

Managing Director
Kevin Brown
BE, CMEngNZ, CPEng, IntPE(NZ), MBA

Juralco Aluminium Building Products Ltd designs and distributes specialist aluminium joinery systems through a national network of franchised fabricators and agents. For more than 25 years we have been at the forefront of specialist aluminium door and window products suitable for New Zealand joinery and building methods. Our comprehensive product range includes security and insect screens, balustrades and gates, shutters and awnings, shower screens, wardrobe doors and organisers and internal doors. The Juralco Edgetec Infinity® Balustrade system is designed for Frameless Glass, from 12mm to 17.52mm, either Top or Faced fixed and for Residential or Commercial use. An Interlinking Top Rail (depending on Glass type) must be used. The system is extremely versatile and can be made in a range of configurations to suit most modern architectural requirements.

The Infinity Semi Frameless Glass system features heavy duty internal clamps at regular intervals all covered by continuous cover extrusions front and back, giving a streamlined minimal look. For Top or Face fixing.

- Juralco Edgetec Infinity® Balustrade System
- Glass Panels from 12mm Toughened Safety Glass to 17.5mm SentryGlas®
- Tested to NZ standard NZS4203 and NZS1170
- Conforms to NZS 4223.3.2016
- Top Interlinking Rail to conform to NZS 4223.3.2016
- Clamps spaced at 400mm - 500mm centres depending on the application and Glass type
- Simple installation. Allows horizontal and vertical glass adjustment.

Top Fix System + Interlinking Top Rail

Top Fix System + SentryGlas. Interlinking Top rail not required

Top Fix System + Interlinking Top Rail

Face Fix System + Interlinking Top Rail

Juralco Edgetec Infinity® Balustrade Patent #NZ 630364

Complies With AS/NZS 1170:2002, NZS 4223.3.2016, NZ Building Code B1, B2, F2, F4 and F9

For Domestic and Residential Occupancy types A, A Other and C3 and for Commercial Occupancy Types B, E, A Other and C3 Occupancy Types as per AS/NZ 1170.1.2002. Not suitable for Commercial C1/C2, C5 and D applications

Code	Type of Occupancy for part of the building or structure	Specific Uses	Glass
A	Domestic and Residential activities	All areas within or serving exclusively one dwelling including stairs, landings etc, but excluding external balconiesand edges of roofs.	Residential,12mm Toughened Glass, 15.2 mm Laminated or 13.52mm SentryGlas®
B, E	Offices and work areas not included elsewhere including storage areas.	Light access stairs and gangways not more than 600mm wide Fixed platforms, walkways, stairways and ladders for access Areas not susceptible to overcrowding in office and institutional buildings; also industrial and storage building.	Commercial,15mm Toughened Glass, 17.2 mm Laminated or or 17.52mm SentryGlas®
A Other, C3	Areas without obstacles for moving people and not susceptible to over crowding	Stairs, landings, external balconies, edges of roofs etc.	Residential or Commercial as detailed above

Note 1 **All for 12mm or 15mm Toughened, 15.2mm or 17.2mm Laminated and 13.52mm or 17.52mm SentryGlas® . All edges polished.**

Note 2 **Juralco Balustrade Systems building code compliance documentation requires all balustrade installations are to be completed in accordance with the requirements of our authorised installer certification.**

Note 3 **Frameless Glass Balustrades must conform to NZS 4223.3.2016**
See individual Layout pages for conformance details

masterspec partner
Section 4852JB

Note 4 **The Dulux powder coating warranty period is conditional upon the Balustrade being maintained in accordance with the Dulux 'Care and Maintenance Instructions'. See Page 5 for warnings concerning Coastal conditions.**
Contact your balustrade installer for a copy of the Care and Maintenance procedure.

Index

Juralco Aluminium Building Products Ltd (JABP)
Specifications for Juralco Edgetec Infinity® Balustrade System

1.Scope
- This specification details the documents the Juralco Edgetec Infinity® Balustrade System refers to in relation to the New Zealand Building Code, the manufacturer's documents, products used in the System, requirements in relation to fixing and surface finishing.

2. NZBC Compliance
- The Juralco Edgetec Infinity® Balustrade System has been reviewed by Lautrec Technology Group Ltd to demonstrate compliance with the structural requirements of the New Zealand Building Code and NZS 1170 : 2002 occupancy A, B, E ,A Other and C3, NZS 3604 Low, Medium, High, Very High and Extra High Wind Zones, to a maximum ULS wind load of 2.5kPa
- The Structural Engineering design includes the requirements of B1 Structure, B2 Durability, F2 Hazardous material and F4 Safety from falling, all from the Building Code.
- Verification Method B1 / VM1, B2/AS1, F4 / AS1
- All glass used in the Juralco Infinity® Balustrade System must conform to AS/NZS 2208. Complies with NZS 4223.3.2016
- Separation of dissimilar materials (as relates to B2 compliance) have been reviewed. For other combinations refer to NZS 3604:2011 Section 2.3.3 Separation and Section 4 Durability

3. Manufacturer's Documents
- The Juralco Edgetec Infinity® Balustrade System manual details all extrusions and components used for the fabrication and installation/fixing of the system.
- A Producer Statement 1(Design) is available.
  Copies of the above documents are available from:
  Juralco Aluminium Building Products Ltd
  48 Bruce McLaren Rd, Henderson, Auckland
  Phone 09 478 8018 Fax 09 478 7883 Email specify@juralco.co.nz
- Any deviation from the standard fabrication or installation/fixing must be accompanied by a site specific PS1 with site specific calculations and drawings

4. Products
- Only extrusions, components and hardware supplied by or specified by JABP may be used in the Juralco Edgetec Infinity® Balustrade System
- Aluminium extrusions, components and hardware – unless specified are manufactured to 6060 T5 specifications
- Stainless Steel components, hardware, fixings – all components to 304 or 316 grade
- Glass - all glass used in the Juralco Edgetec Infinity® Balustrade System must conform to the specifications as listed in the Juralco Edgetec Infinity® Balustrade System manual with each panel conforming to AS/NZS 2208 as confirmed by the Safety Stamp detailing the manufacturer's description and licence number.

5.Surface Finishing
- Juralco Aluminium Building Products Ltd is a Dulux Registered Applicator site, registration number 2101. JABP uses only Dulux branded powder coating materials
- Dulux Duralloy® powder coating systems are suitable for properties greater than 100m from high tide level AAMA 2603 performance. Residential buildings, 3 levels max. Warranty 10 yrs
- Dulux Duralloy Plus® powder coating systems are suitable for properties greater than 10m from high tide level. AAMA 2603 performance. Residential and Light commercial buildings, 3 levels max. Warranty 15 yrs
- Dulux Duratec® powder coating systems are suitable for properties greater than 10m from high tide level AAMA2603 and 2604 performance. All Residential and Commercial buildings. Warranty 25 yrs

6. Installation and Fixing
- The Juralco Edgetec Infinity® Balustrade System must only be installed in accordance with the Juralco Edgetec Infinity® Balustrade System manual
- Any deviation from that specified in the Juralco Edgetec Infinity® Balustrade System manual must only be in accordance with the site specific PS1 with site specific calculations and drawings listing the non standard details
- The Juralco Edgetec Infinity® Balustrade System must only be fabricated/installed by a Juralco approved fabricator
- Upon completion of the installation the fabricator must supply the Council with a PS3 (Construction)

Important information - Powder Coating systems.

Powdercoat Systems The new standard Dulux powder coating system used by Juralco is Duralloy Plus®. Also Duralloy® and Duratec®. All as per specs above. Juralco Powder coated prices are for Duralloy Plus® and Duralloy® (same pricing). Duratec® prices on application.

Attachment to structures A PVC Tape or similar material spacer must be used to separate powder coated aluminium items from all concrete and steel structures. Failure to do so can lead to the chemicals in the structure affecting the powder coating, leading to corrosion.

Swimming Pools The chlorinated water in swimming pools can cause the deterioration of powder coated surfaces, leading to corrosion of the underlying surface. It is recommended that Powder coated surfaces be 1200mm min from a pool.

Care The Dulux powder coating warranty period is conditional upon the surface being maintained in accordance with the Dulux 'Care and Maintenance Instructions'. Download from Dulux or refer to the back page of this manual.

Edgetec Infinity® Glass Clamps
Face Fix + Interlinking Rail

Glass must have a minimum strength of 100Mpa. All edges polished

Residential & Domestic only
Occupancy types A, A Other and C3

For 12mm Toughened Glass

VHWZ	**EHWZ**
- D max 500mm.	**- D max 500mm.**
- BH max 1200mm	**- BH max 1000mm**

For 15.2mm Toughened Laminated Glass

- D max 500mm.
- BH max 1150mm

Note: See individual Mounting pages for construction options

Max Tension load per Face fixing = 20kN

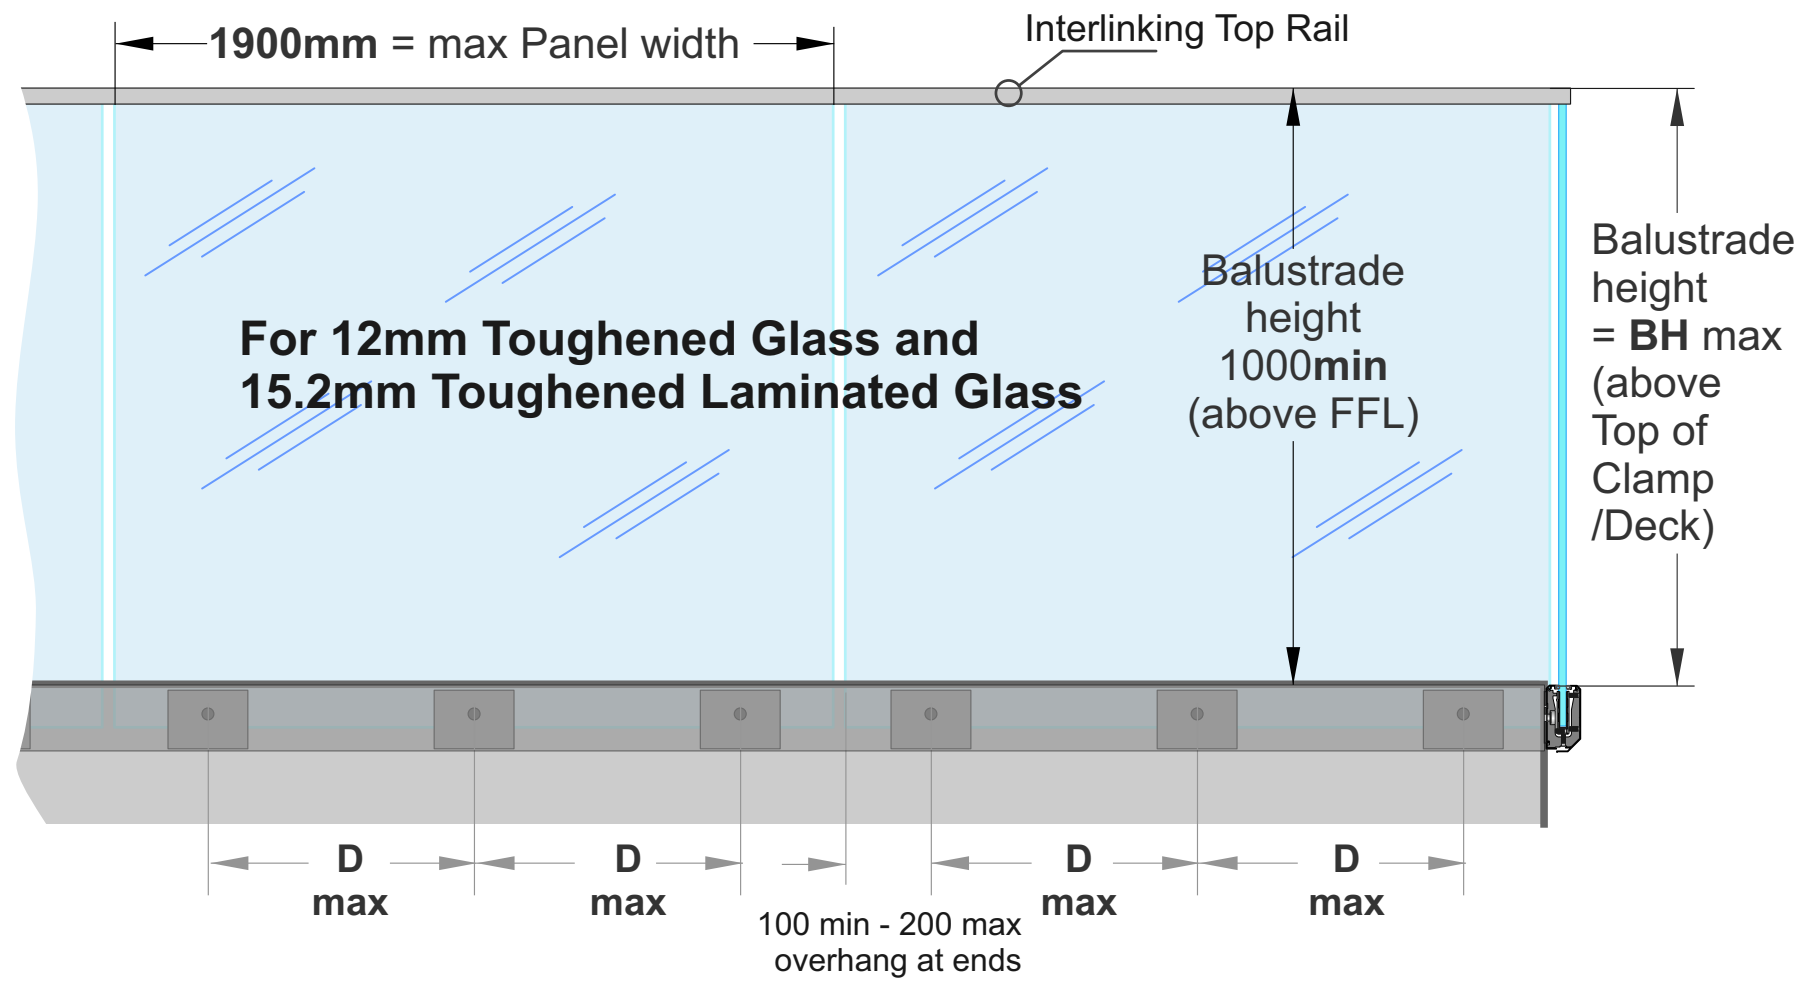

Exceeds the wind loading for all Wind Zones up to **and Including Extra High Wind Zone** as set out in NZS 3604:2011

Refer to the Interlinking Top Rail page for conformance to NZS 4223.3.2016.

Edgetec Infinity® Glass Clamps
Face Fix + Interlinking Rail

Glass must have a minimum strength of 100Mpa. All edges polished

Commercial Occupancy types B, E, and C3 only

For 15mm Toughened Glass and 17.2mm Toughened Laminated Glass

- D max 400mm
- BH max 1300mm

Note: See individual Mounting pages for construction options

Max Tension load per Face fixing = 23kN

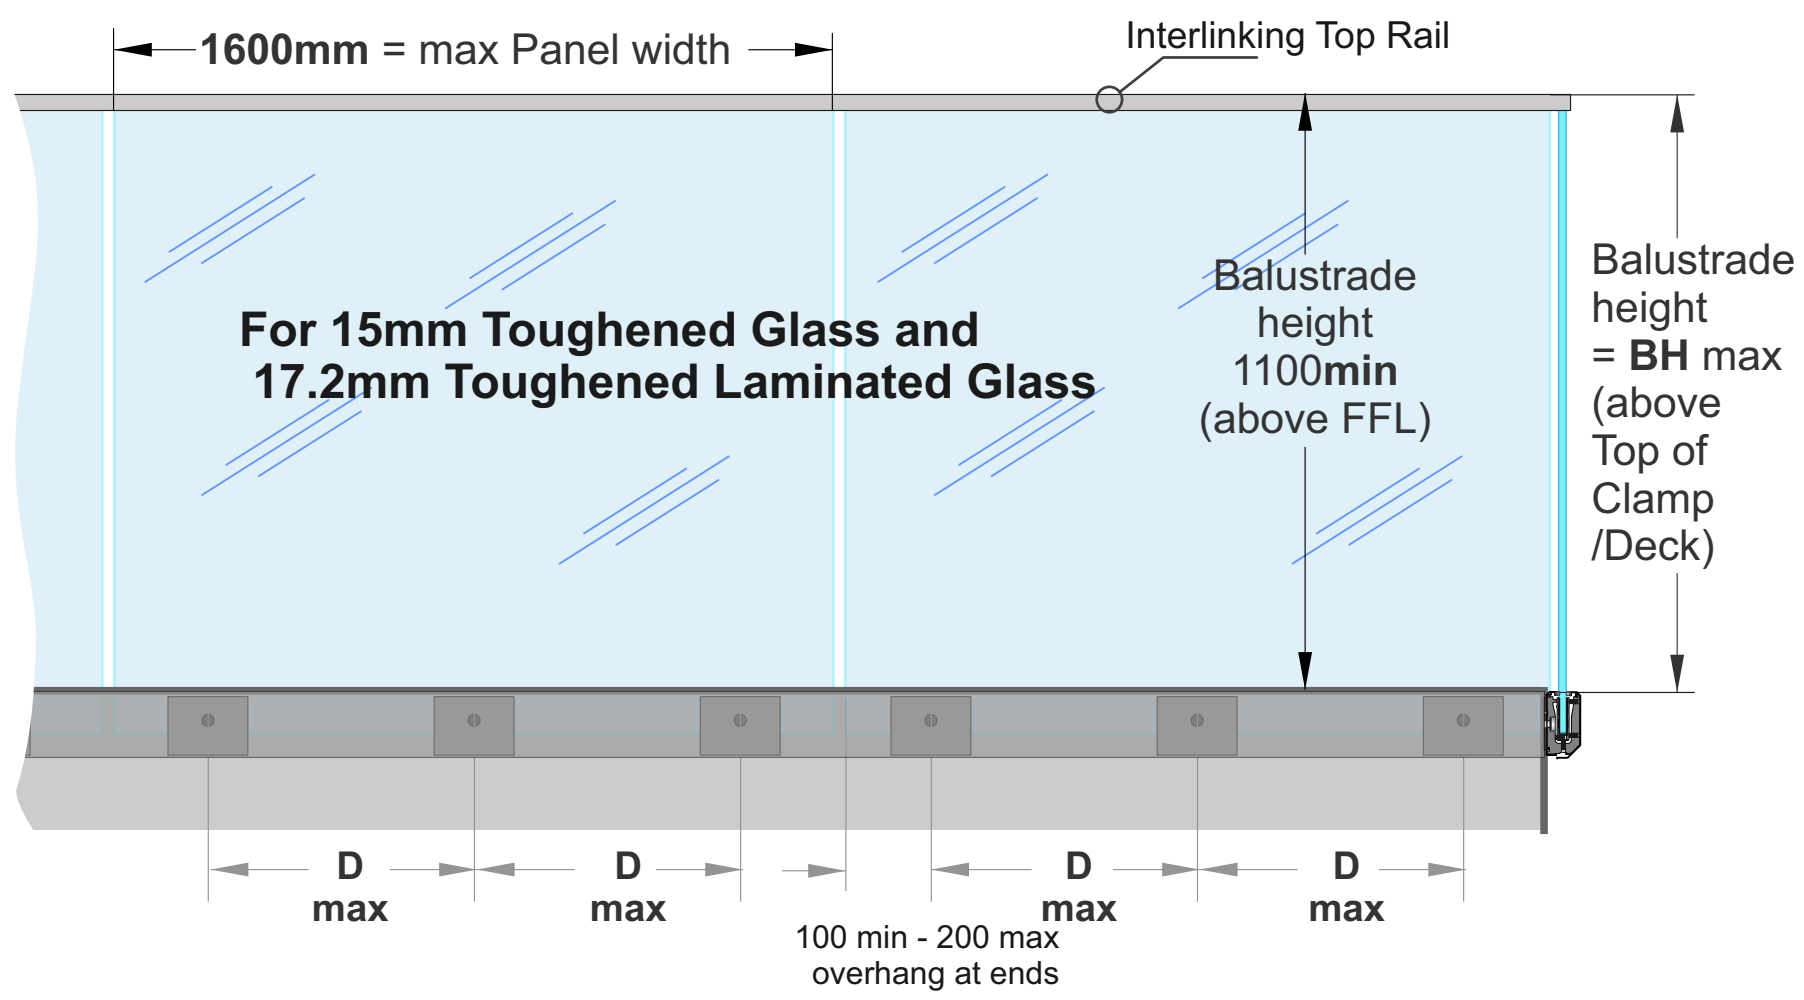

Exceeds the wind loading for all Wind Zones up to **and Including Extra High Wind Zone** as set out in NZS 3604:2011

Refer to the Interlinking Top Rail page for conformance to NZS 4223.3.2016.

Edgetec Infinity® Glass Clamps
Face Fix

POOL FENCING only

Glass must have a minimum strength of 100Mpa. All edges polished

Max Tension load per Face fixing = 27kN

Applies to Swimming Pools as of Jan 2017, complies with the Building Code clause F9 and section 162C of the Building Act.

Applies to Pool Fences not protecting a fall of 1.0m or more

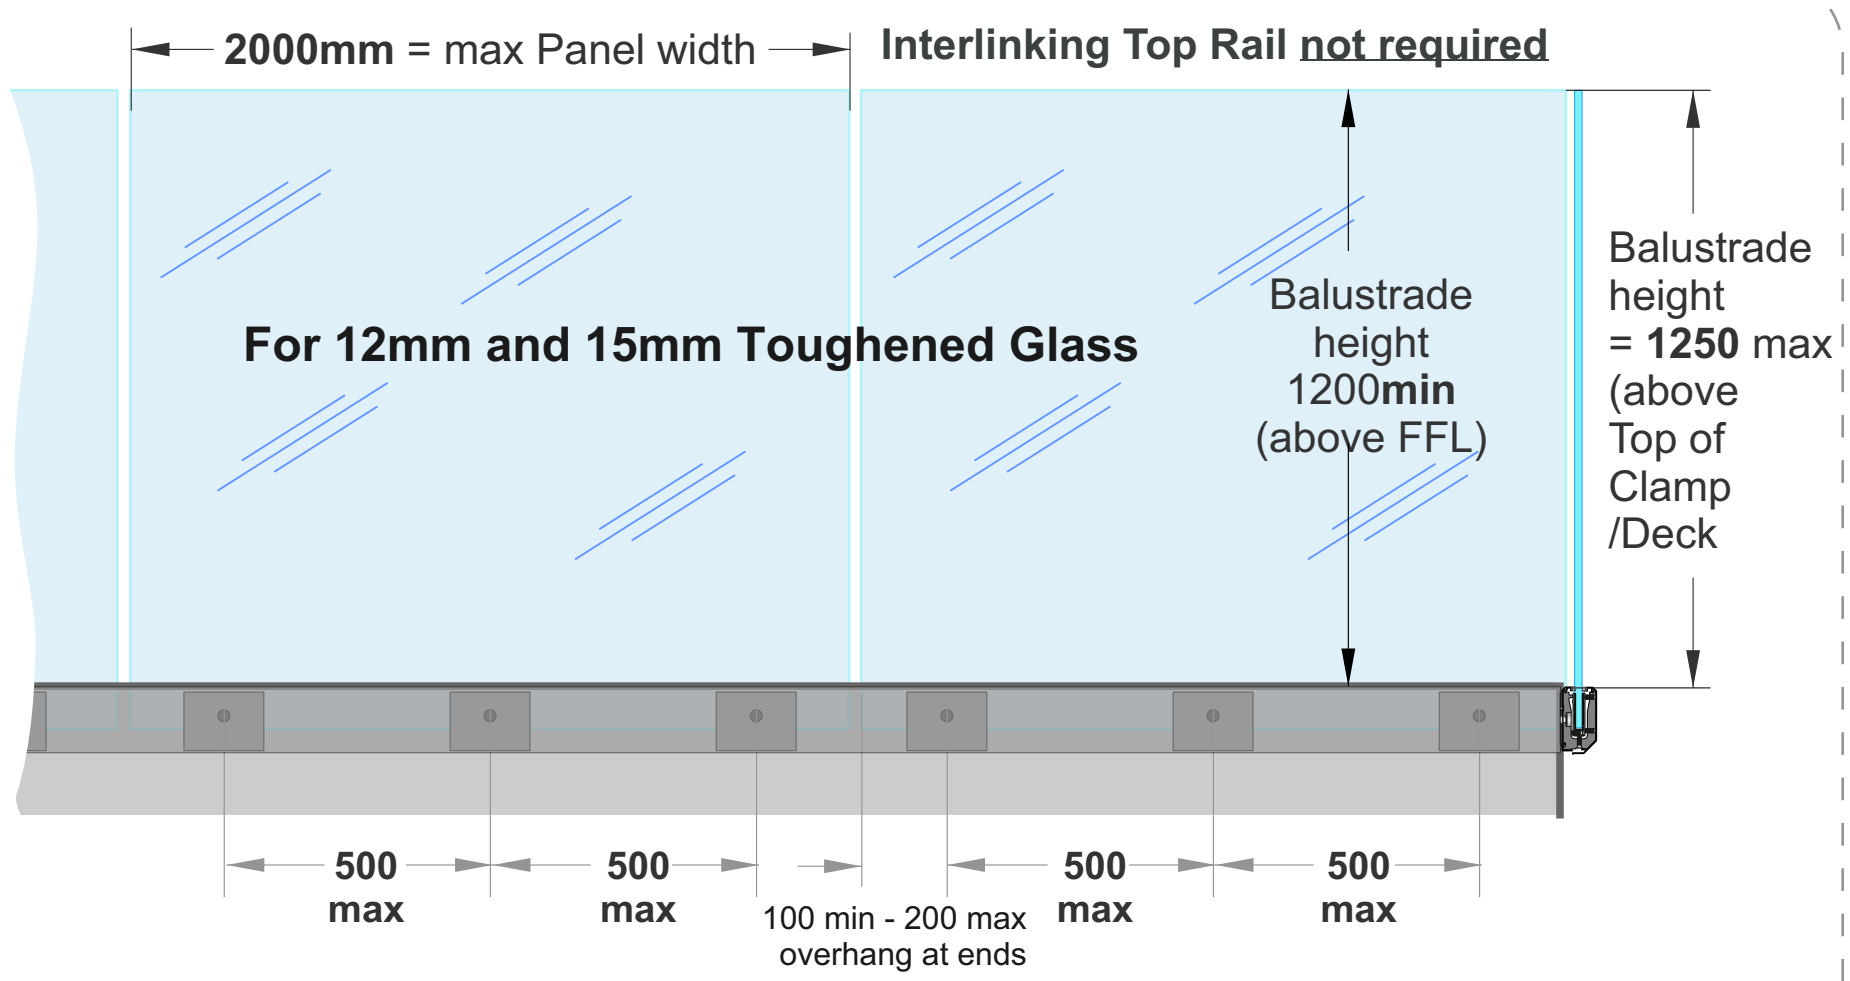

12mm Toughened - Up to and including Very High Wind Zone.	**15mm Toughened - Up to and including Extra High Wind Zone**

Juralco Edgetec Infinity® Balustrade System
Typical Layouts - Face Fix

Edgetec Infinity® Glass Clamps
Face Fix + Stiffener Brackets

Glass must have a minimum strength of 100Mpa. All edges polished

Residential & Domestic only
Occupancy types A, A Other and C3

For 15.2mm Toughened Laminated Glass

- **D max 500mm.**
- **BH max 1150mm**

For 13.52mm SentryGlas

- **D max 350mm.**
- **BH max 1050mm**

Note: See individual Mounting pages for construction options

Max Tension load per Face fixing = 20kN

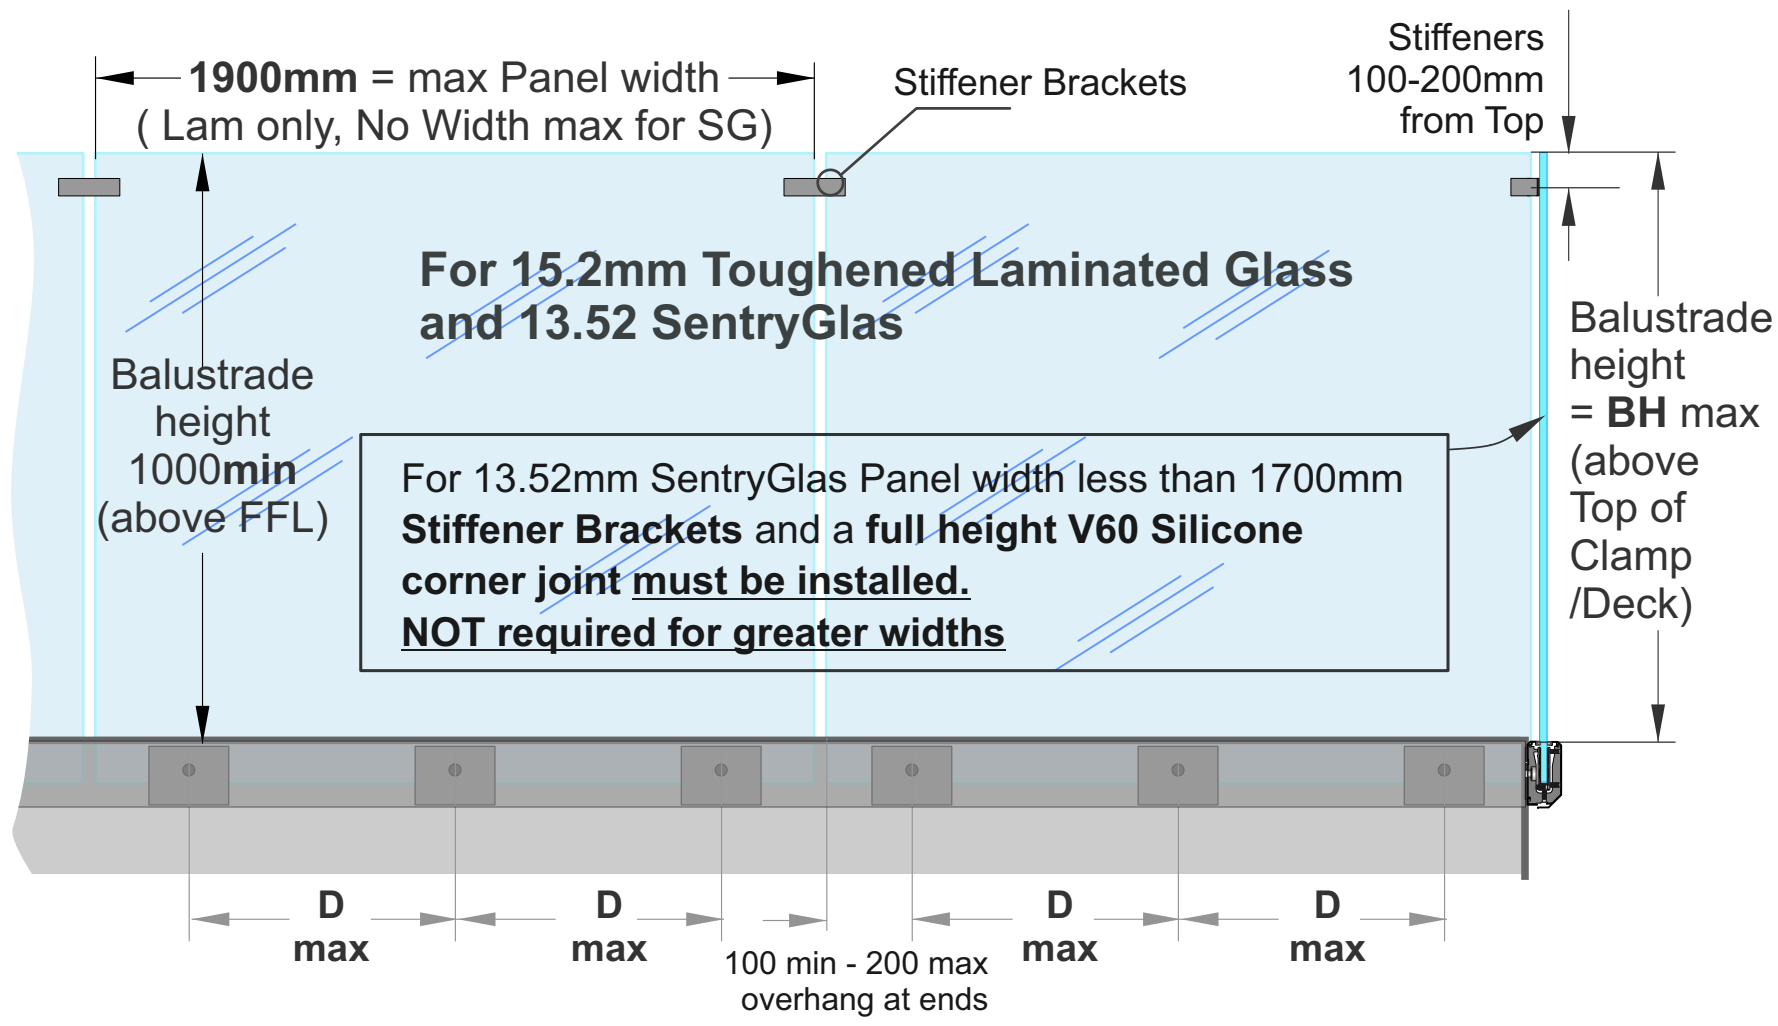

Exceeds the wind loading for all Wind Zones up to **and Including Very High Wind Zone** as set out in NZS 3604:2011

Refer to the Stiffener Bracket pages for conformance to NZS 4223.3.2016.

Edgetec Infinity® Glass Clamps
Face Fix + Stiffener Brackets

Glass must have a minimum strength of 100Mpa
All edges polished

Commercial Occupancy types B, E, and C3 only

For 17.2mm Toughened Laminated Glass

- **D max 400mm**
- **BH max 1300mm**

For 17.52mm SentryGlas

- **D max 350mm**
- **BH max 1200mm**

Note: See individual Mounting pages for construction options

Max Tension load per Face fixing = 23kN

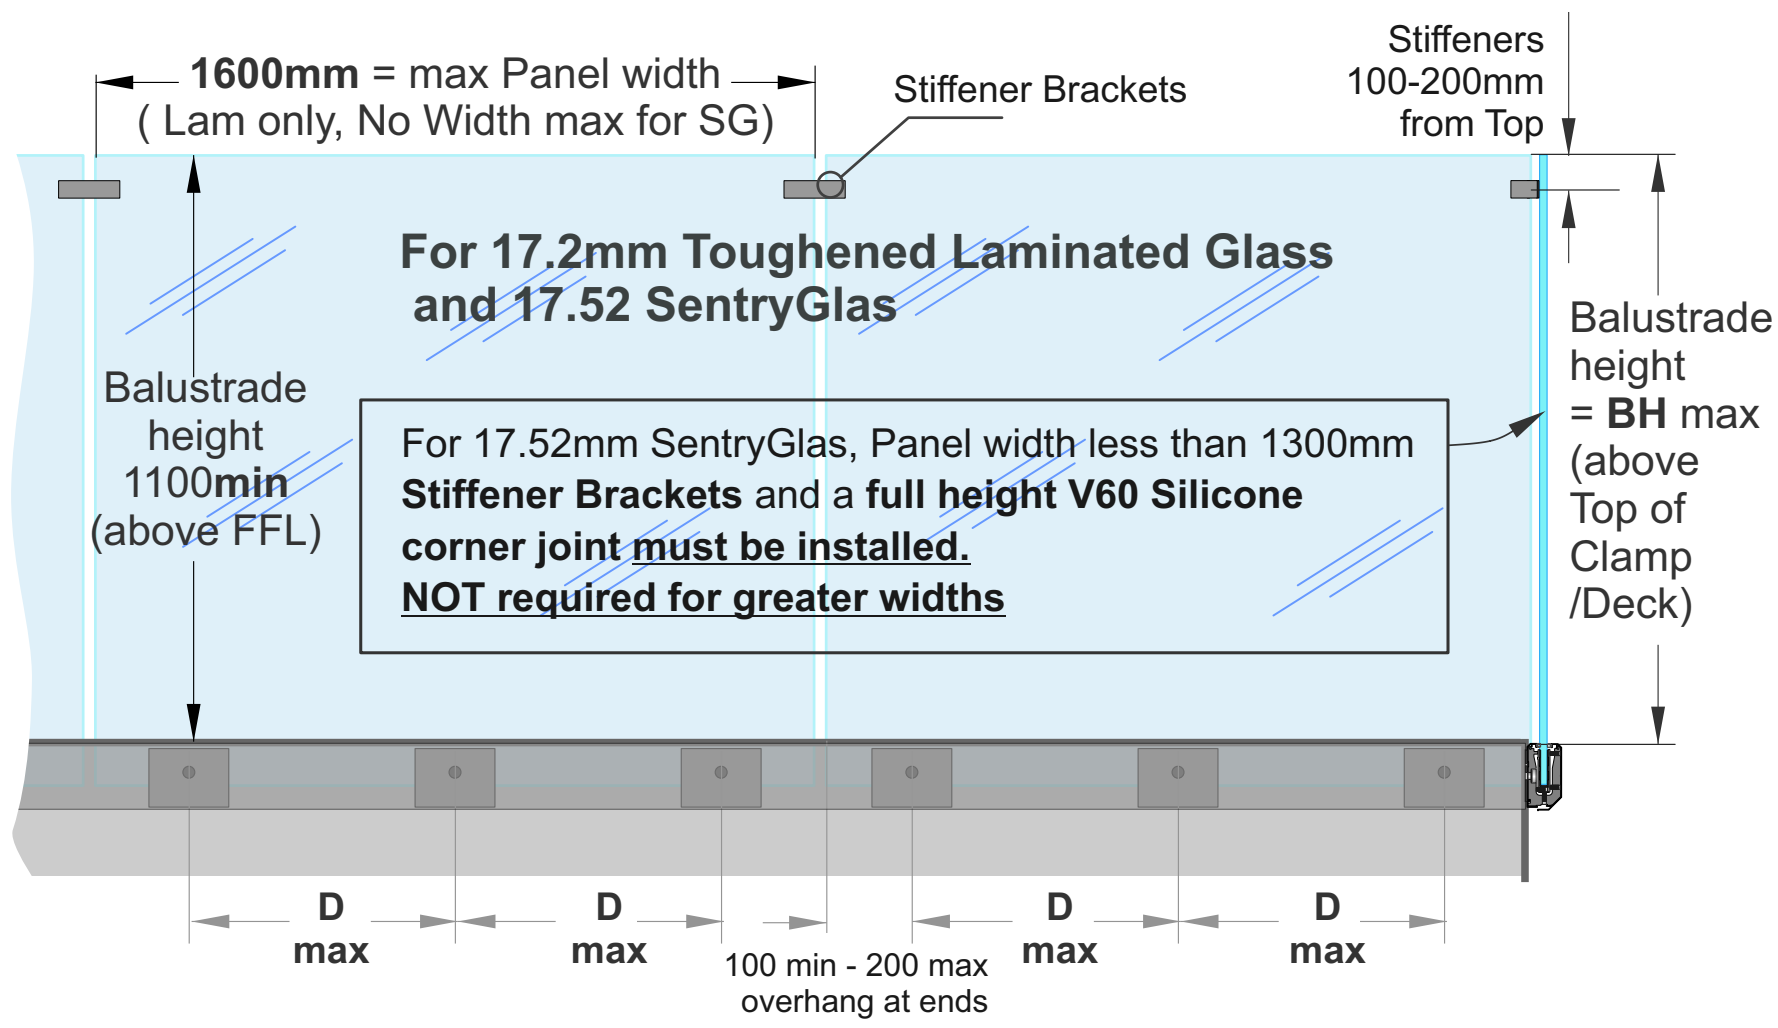

Exceeds the wind loading for all Wind Zones up to **and Including Extra High Wind Zone** as set out in NZS 3604:2011

Refer to the Stiffener Bracket pages for conformance to NZS 4223.3.2016.

SentryGlas® Glass Layers and Thickness Orientation

Glass Thickness (mm)	Inner Layer of Glass thickness (mm) Deckside	Interlayer thickness(mm) and Type	Outer Layer Glass thickness (mm)
13.52	6	1.52 SentryGlas®	6
17.52	8	1.52 SentryGlas®	8

Refers to previous page.
Laminated Glass Layers and Thickness Orientation

Glass Thickness (mm)	Inner Layer of Glass thickness (mm) Deckside	Interlayer thickness(mm) and Type	Outer Layer Glass thickness (mm)
15.2	8	1.2EVA	6
17.2	8	1.2EVA	8

Juralco Edgetec Infinity® Balustrade System
Typical Stair Layout

Edgetec Infinity®
Stairs, Face Fix

Stair structure to be designed by others to resist Balustrade actions as per NZS1170.1 Table 3.3

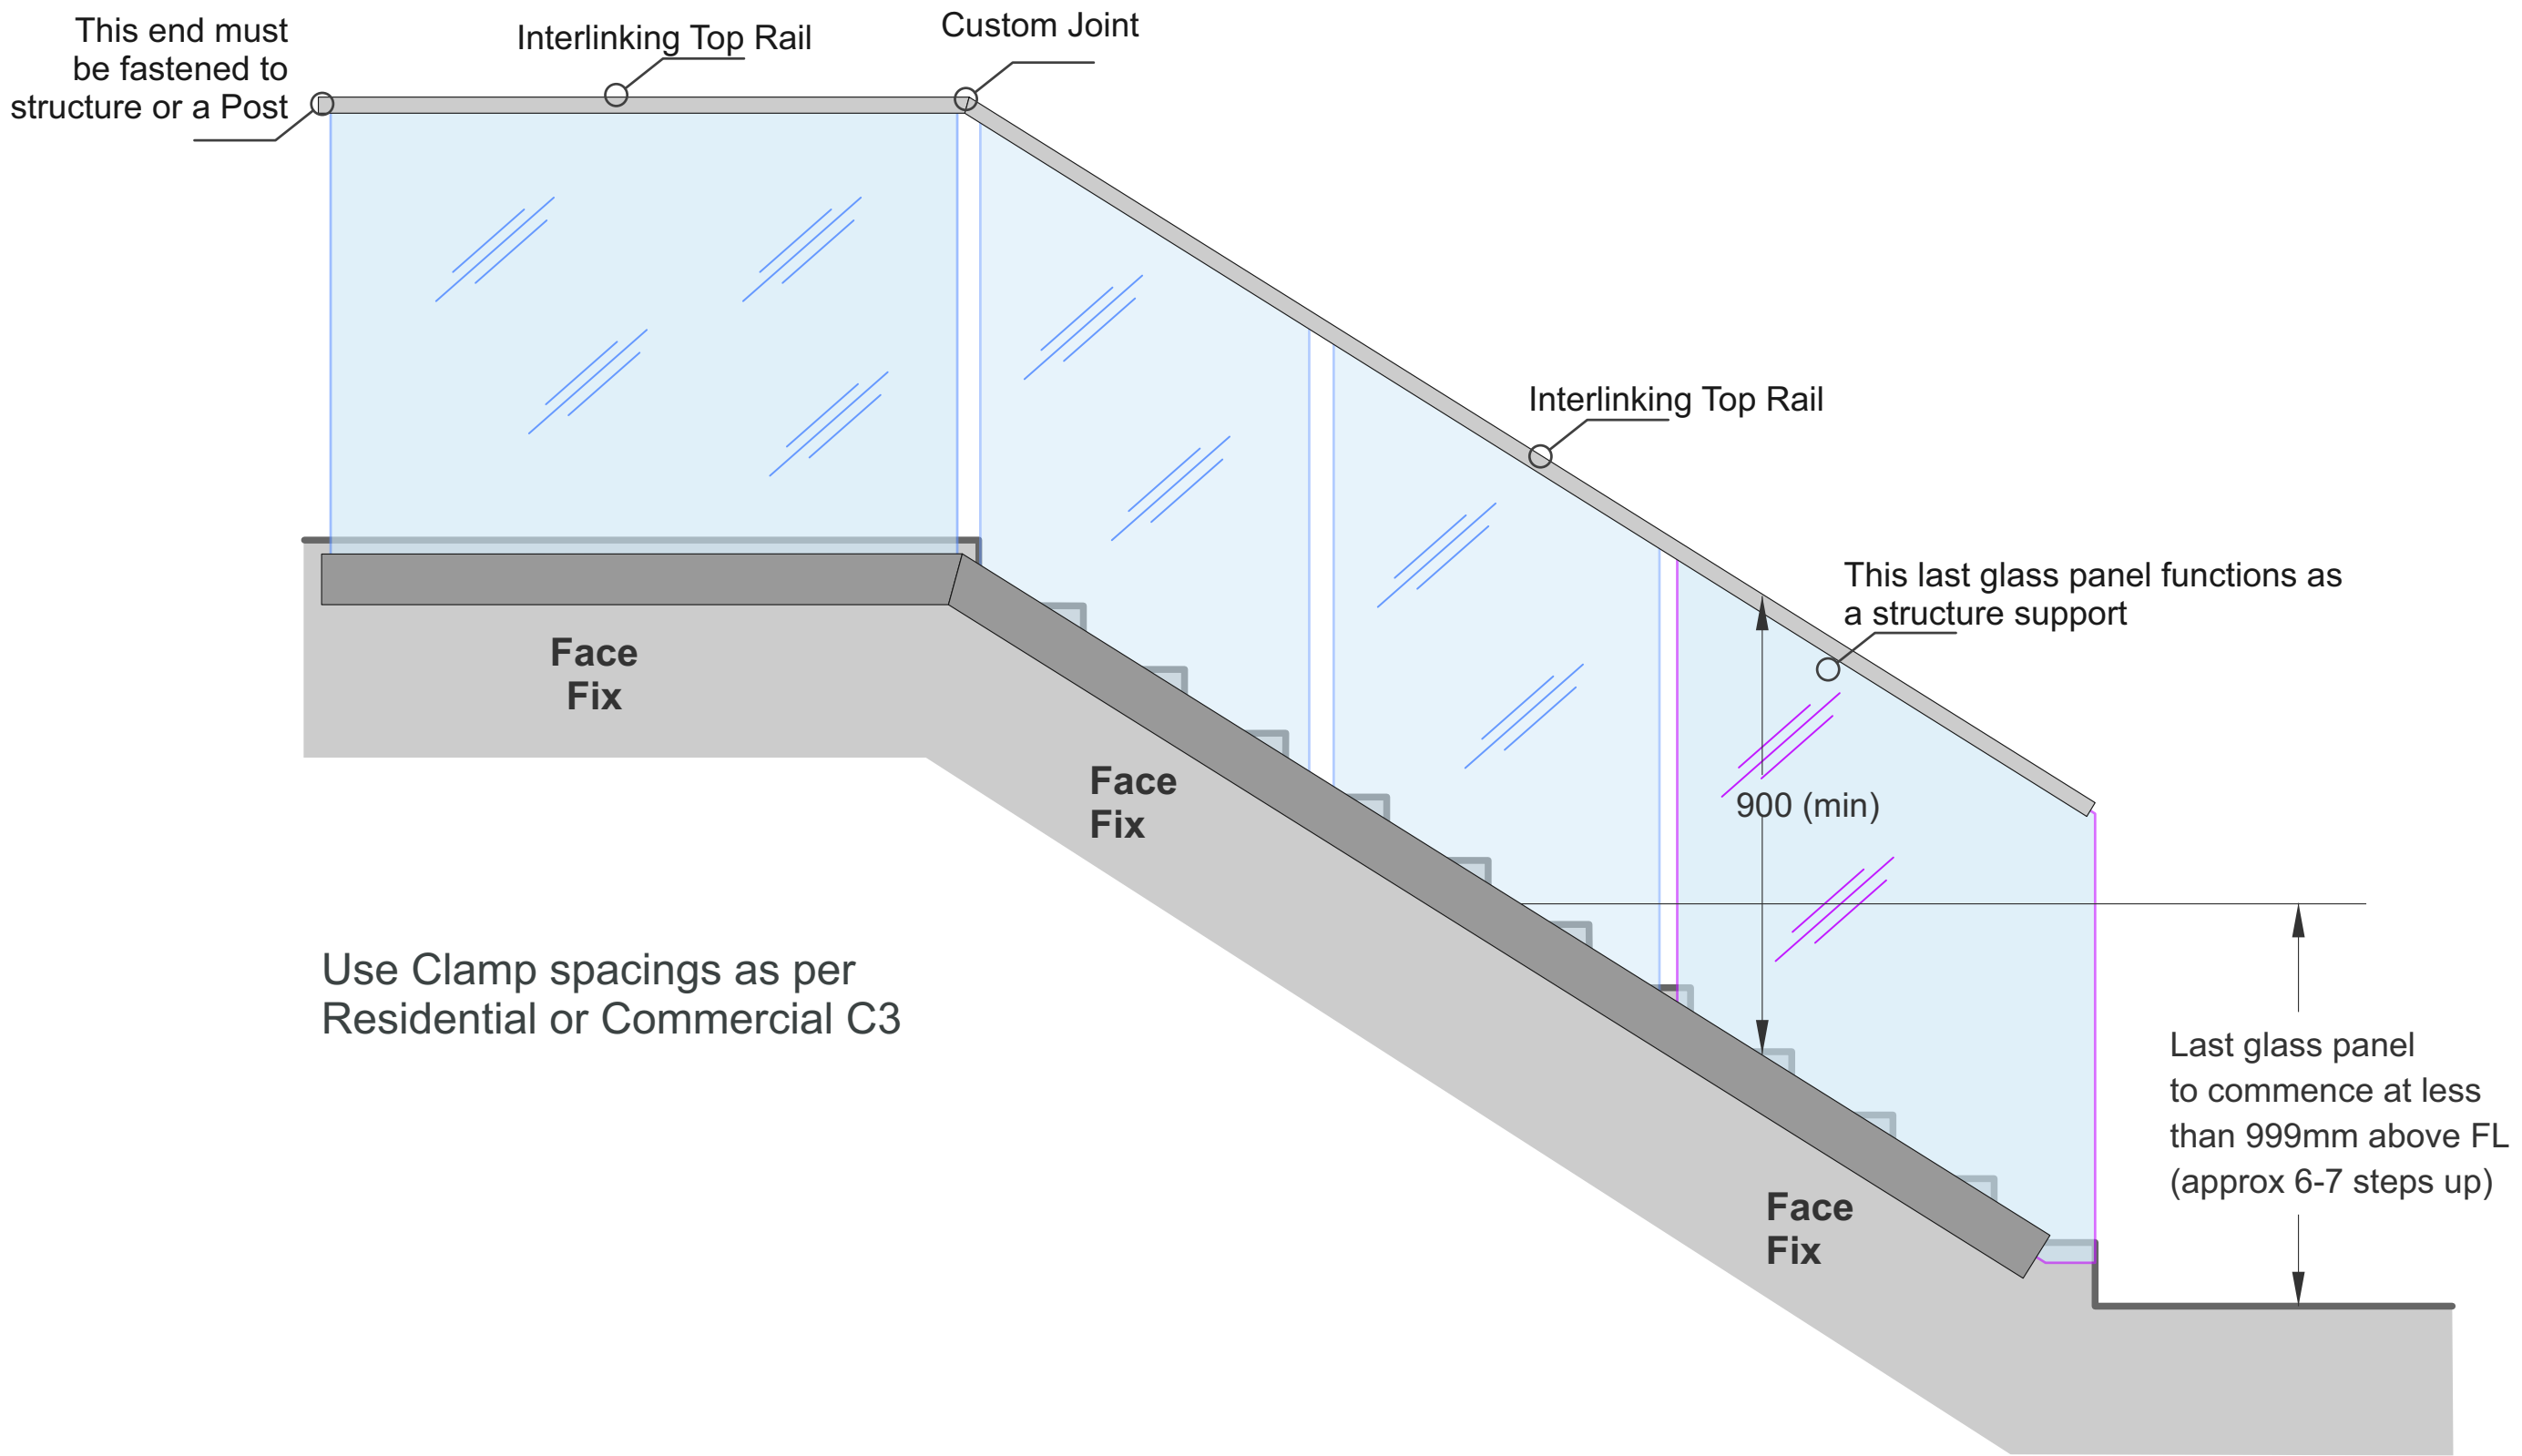

Edgetec Infinity®
Face Fix only
Stair Stringer Detail

Stair structure to be designed by others to resist Balustrade actions as per NZS1170.1 Table 3.3
For Internal use only, Residential Type A

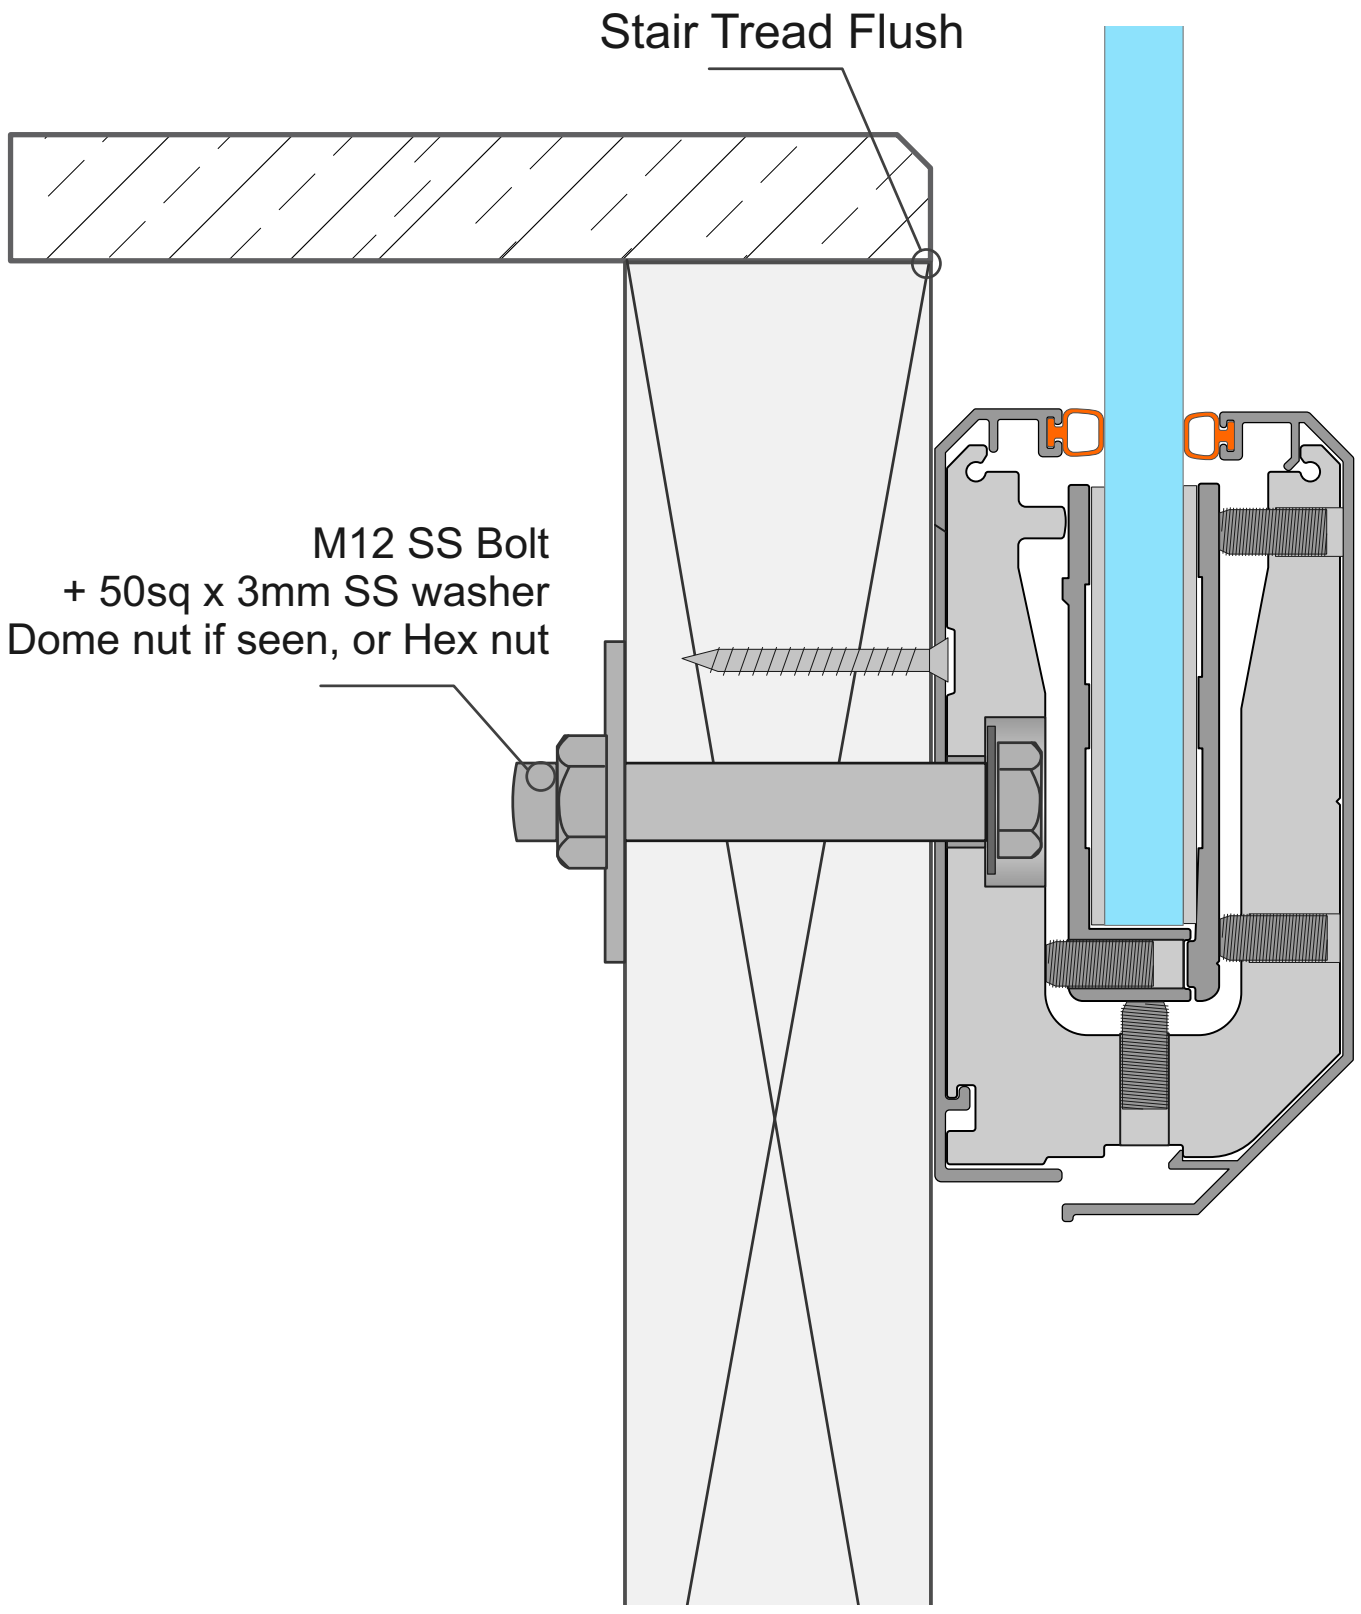

Edgetec Infinity®
Glass Clamp
Face Fix
(12mm Glass Shown)

The Balustrade Clamp comes as a kit;
Clamp Extrusion, Front and Rear Gasket Extrusions
Gaskets, Glass bottom Packer and all adjusting screws.
(M12 Fastener not included)

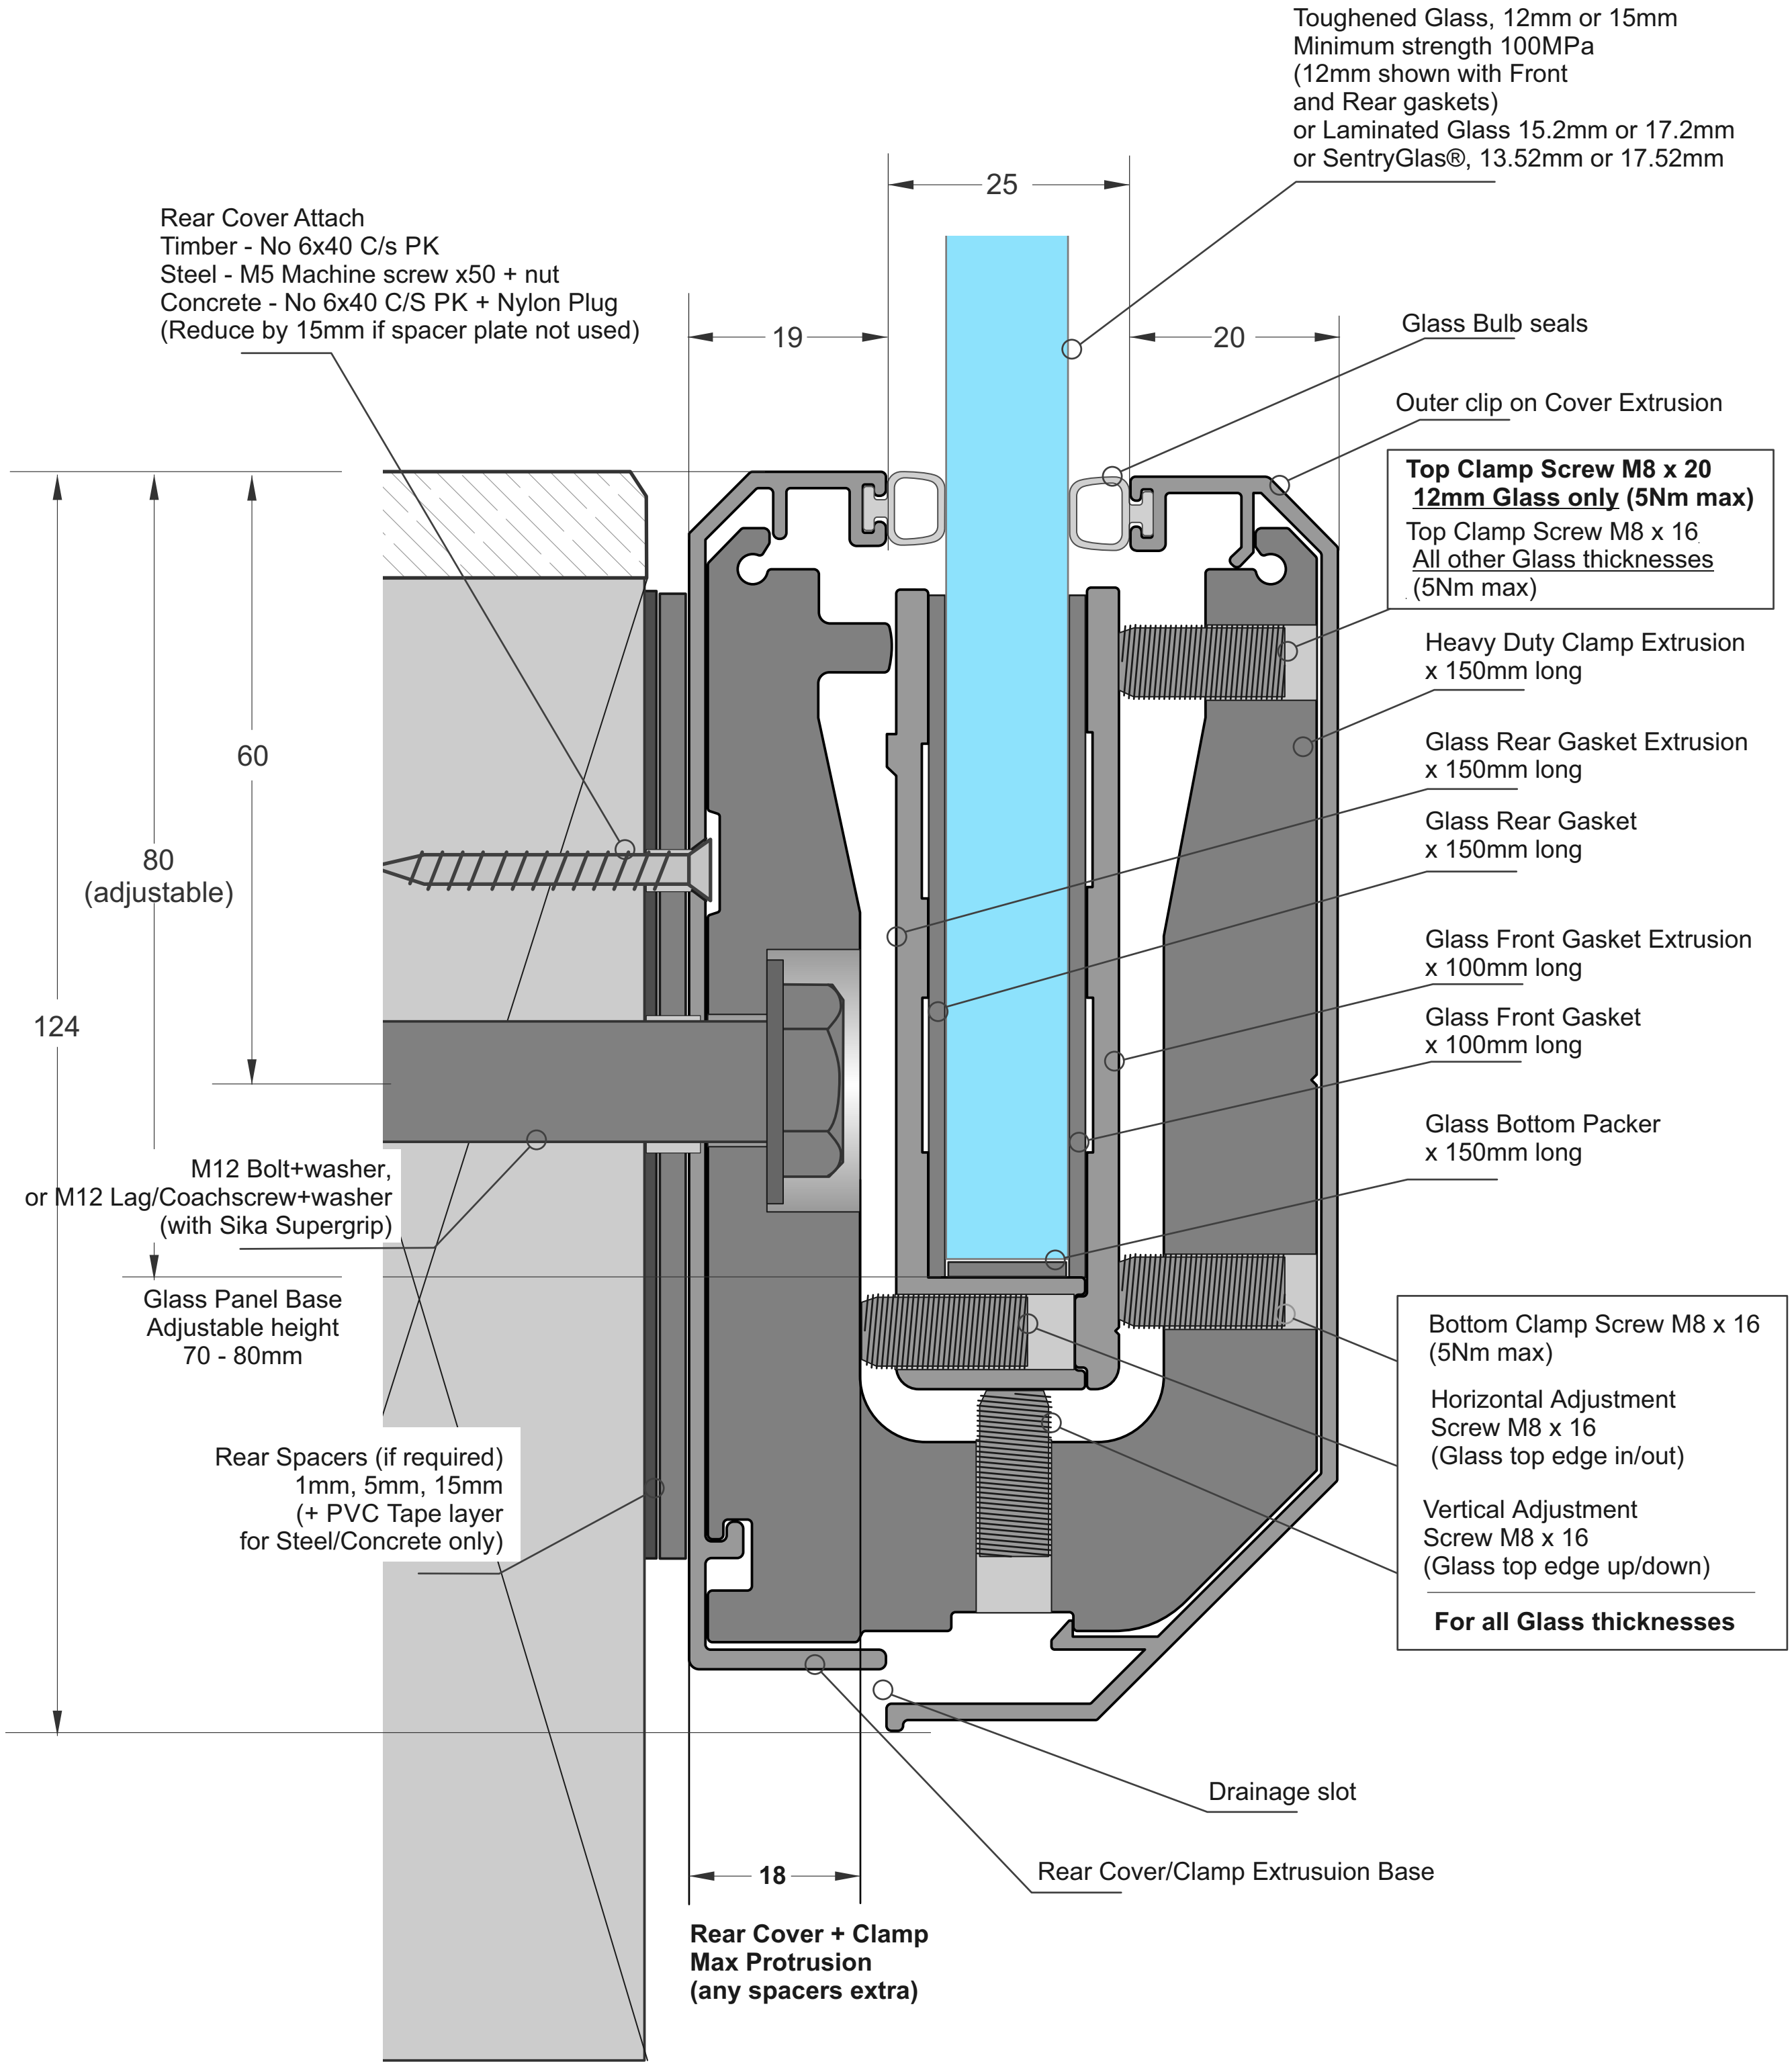

Elevation showing the Main Features

Juralco Edgetec Infinity® Balustrade System
Face Fix Components

Heavy Duty Clamp Extrusion
Part No JET/IB/CB
Face Fix

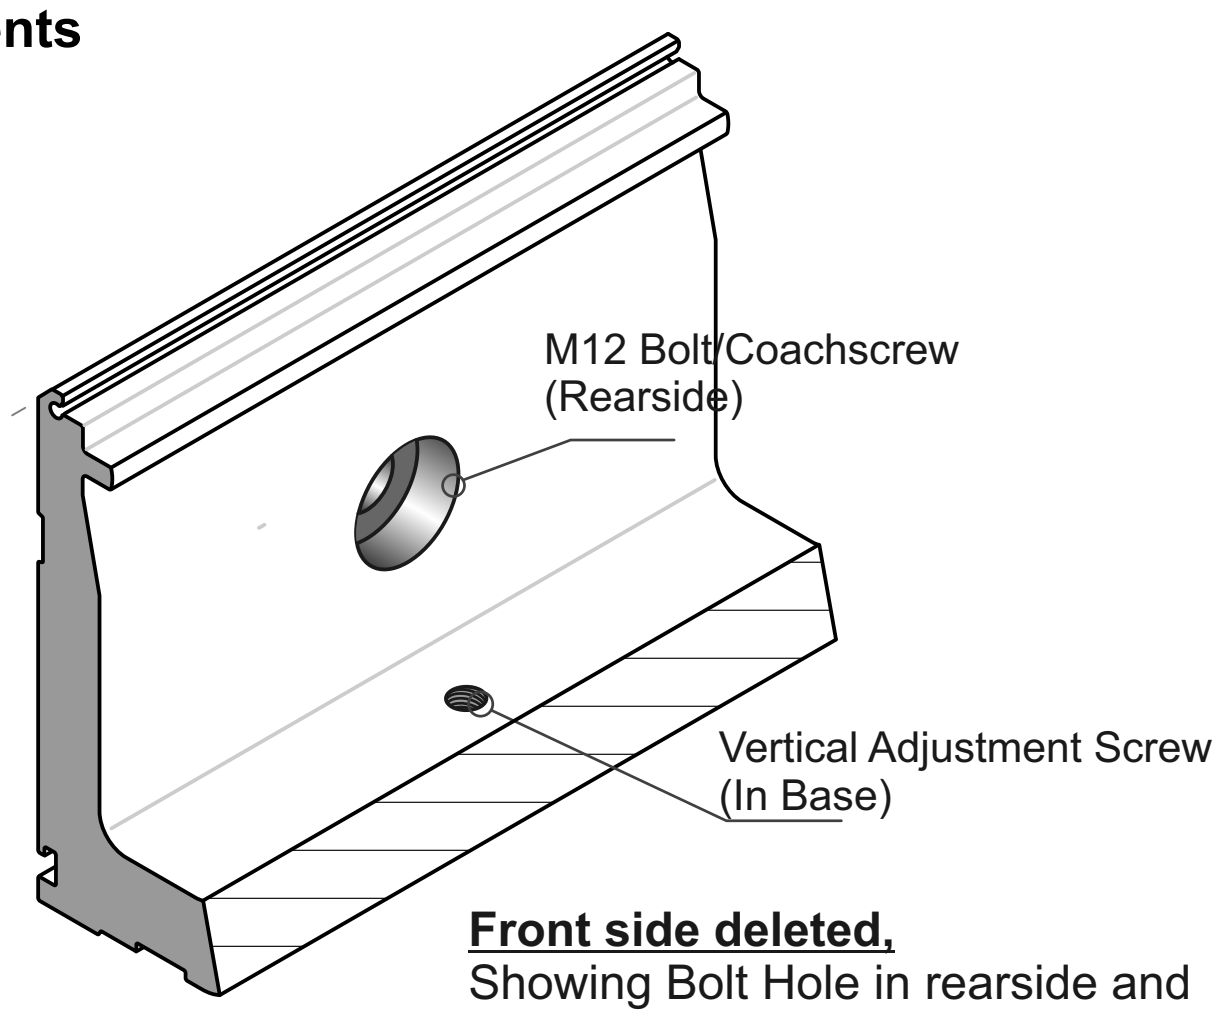

Front side deleted,
Showing Bolt Hole in rearside and
Height adjusting screw

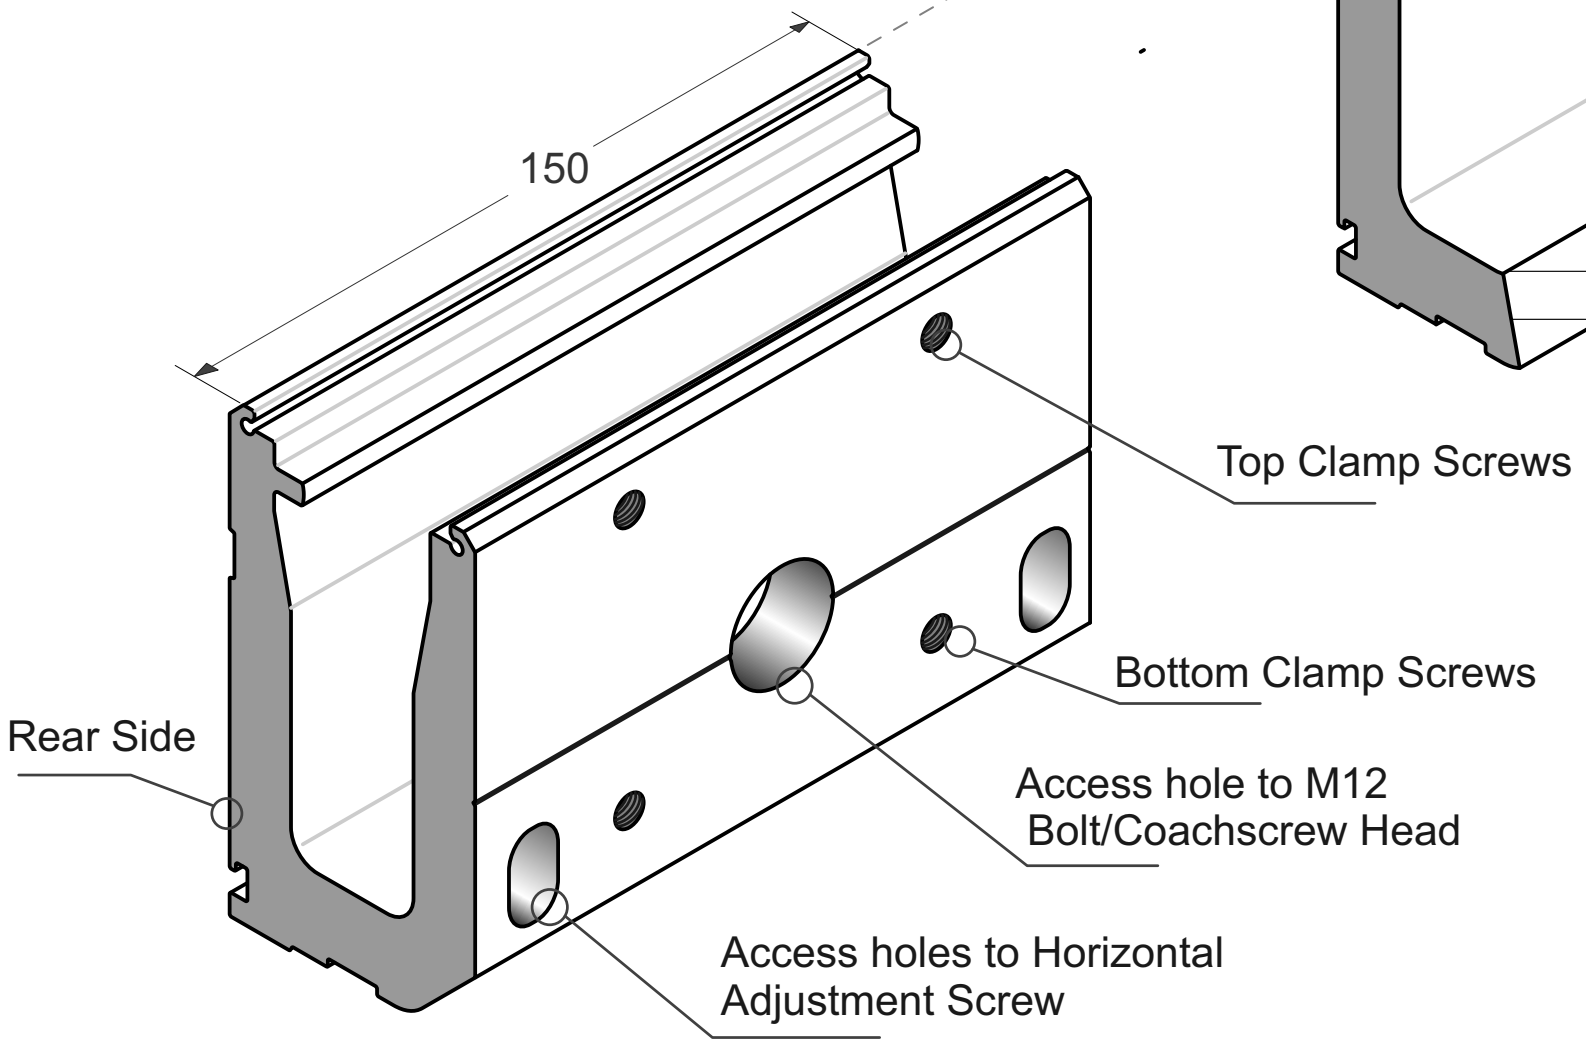

Heavy Duty Clamp Extrusion
90deg Internal Corner
Part No JET/IB/INCNRBLK
Face Fix

Note: These corners are used only
to align the mitered Rear and Front cover corners.
They are not supplied with Glass Clamps
or adjusting screws

Heavy Duty Clamp Extrusion
90deg External Corner
Part No JET/IB/EXCNRBLK

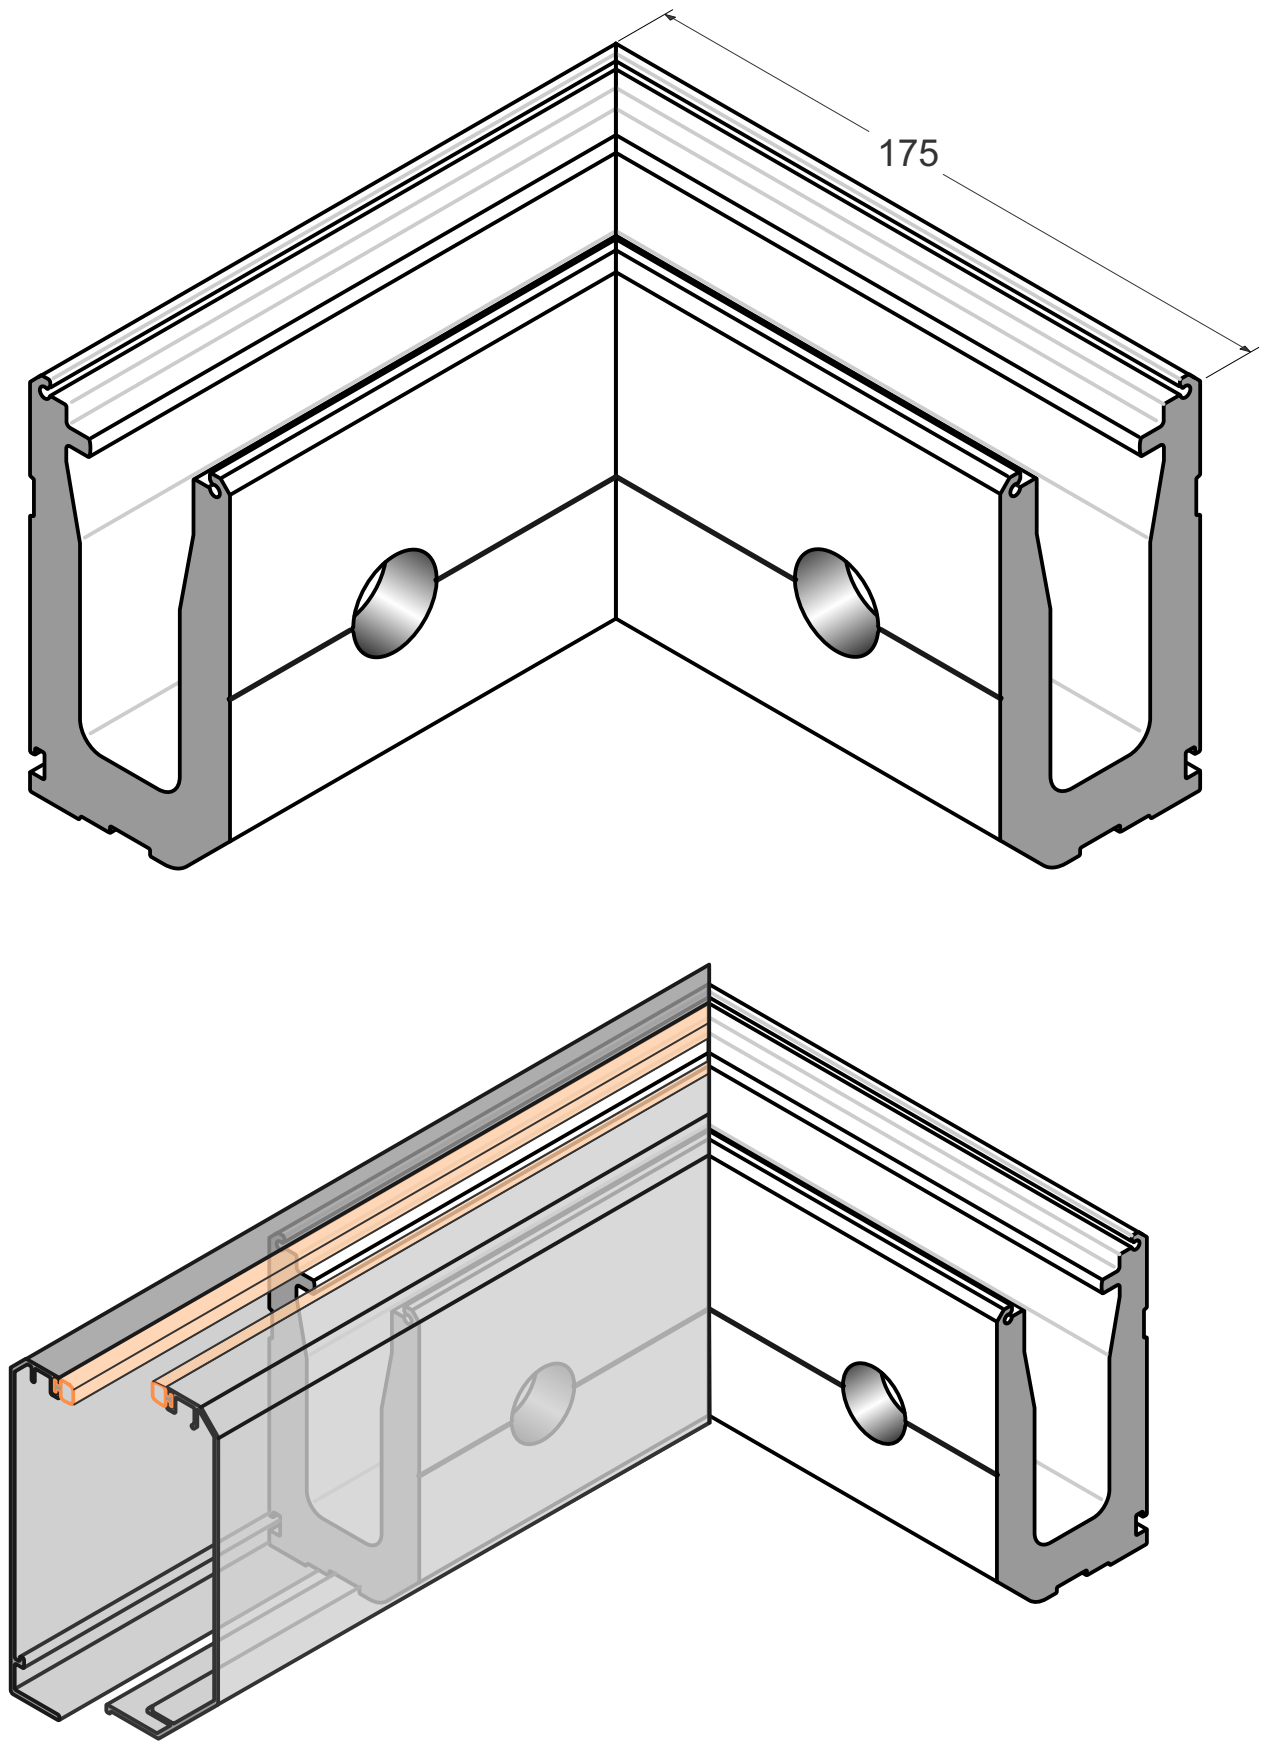

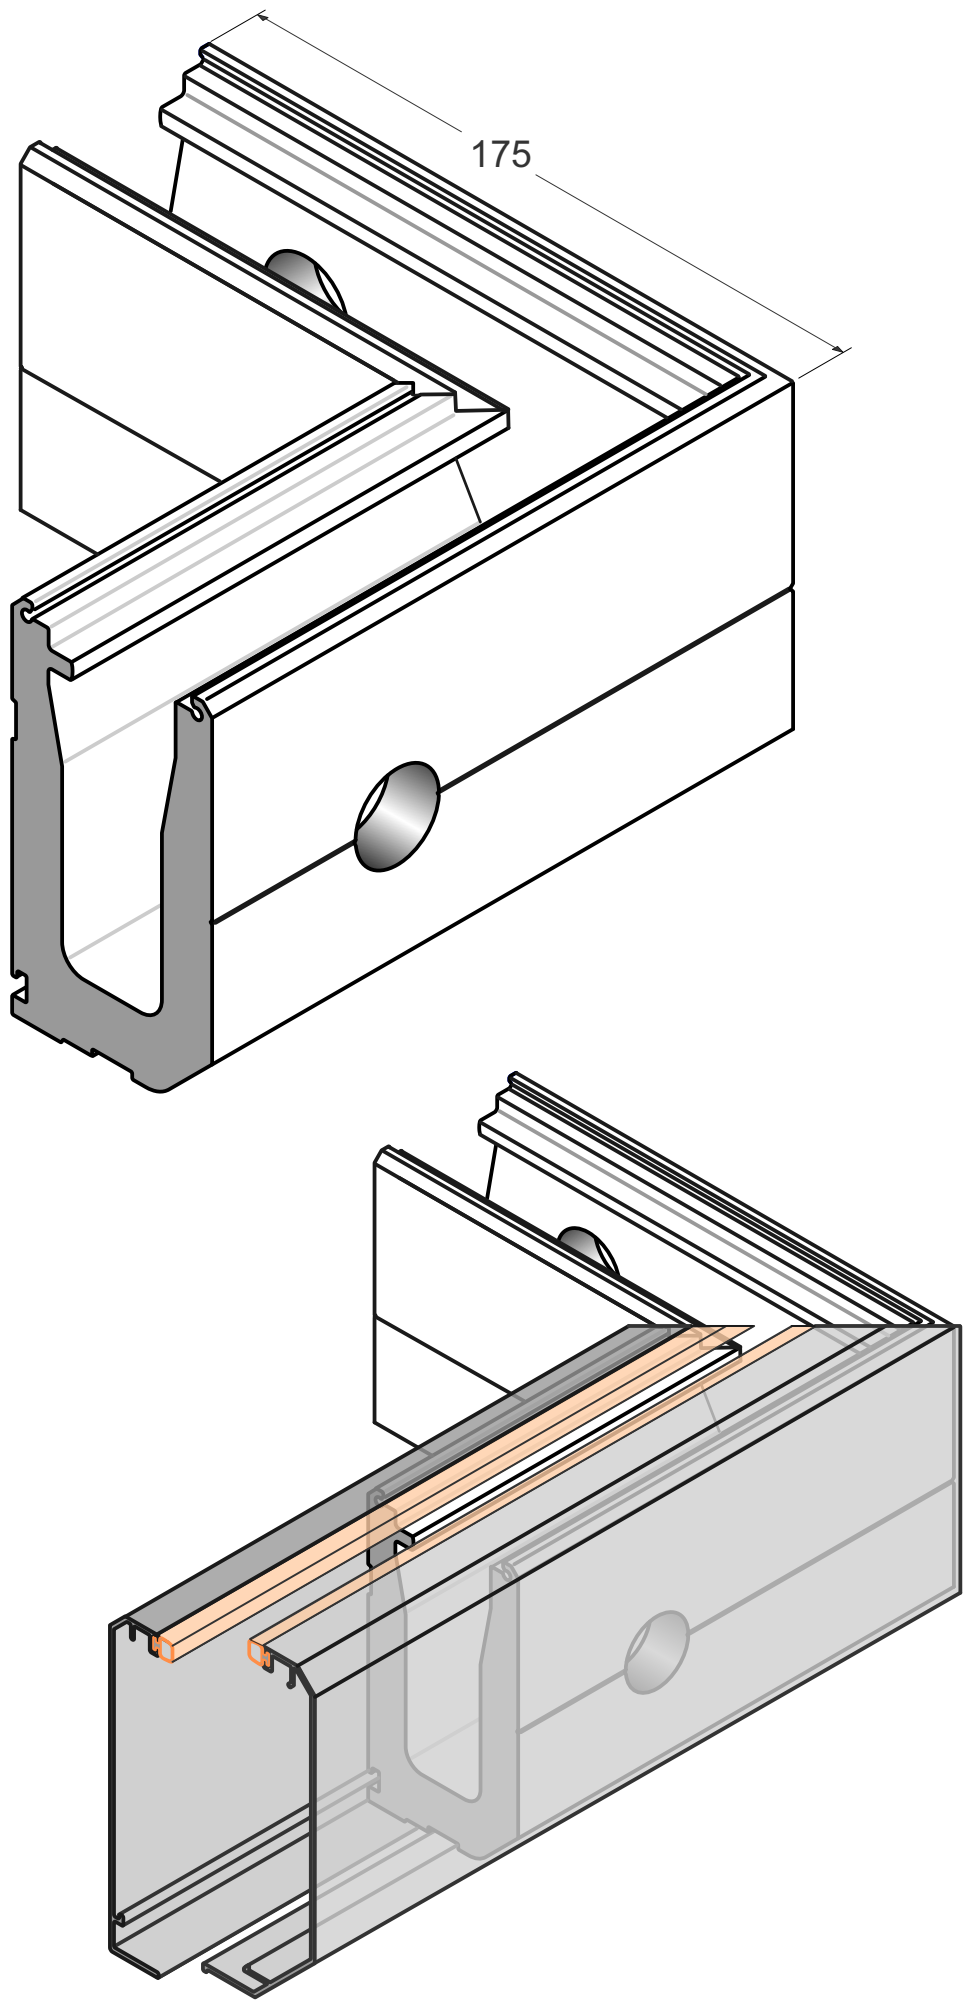

Juralco Edgetec Infinity® Balustrade System
Face Fix Extrusions

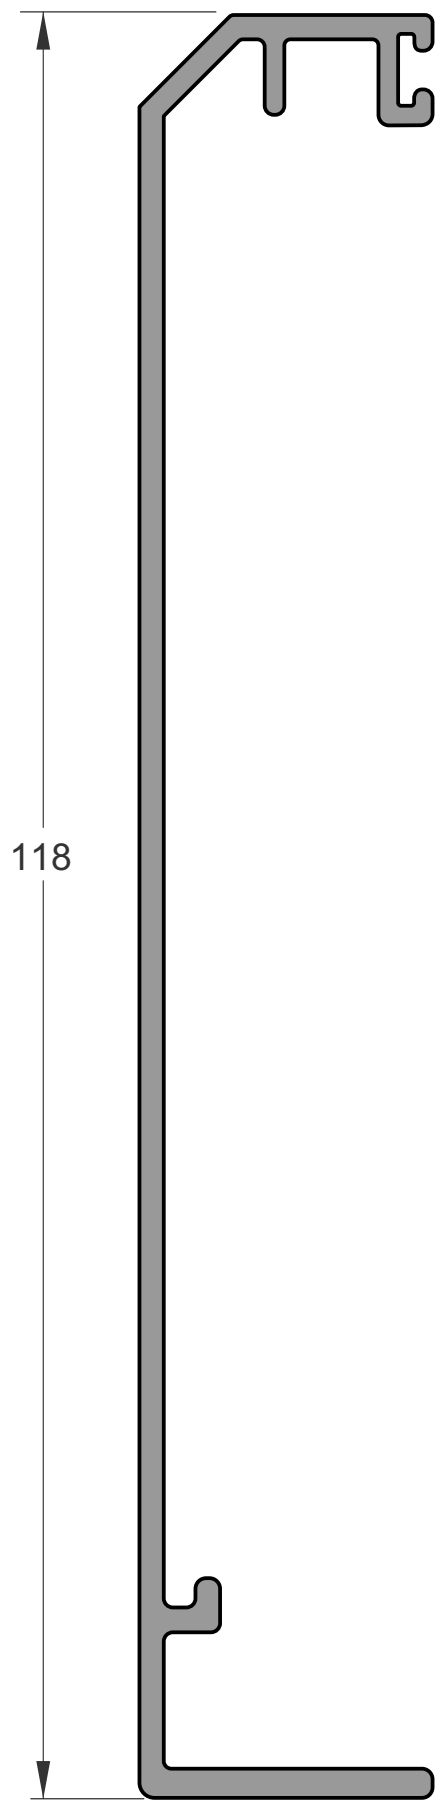

Rear Cover/clamp Base
JET/IB/IC

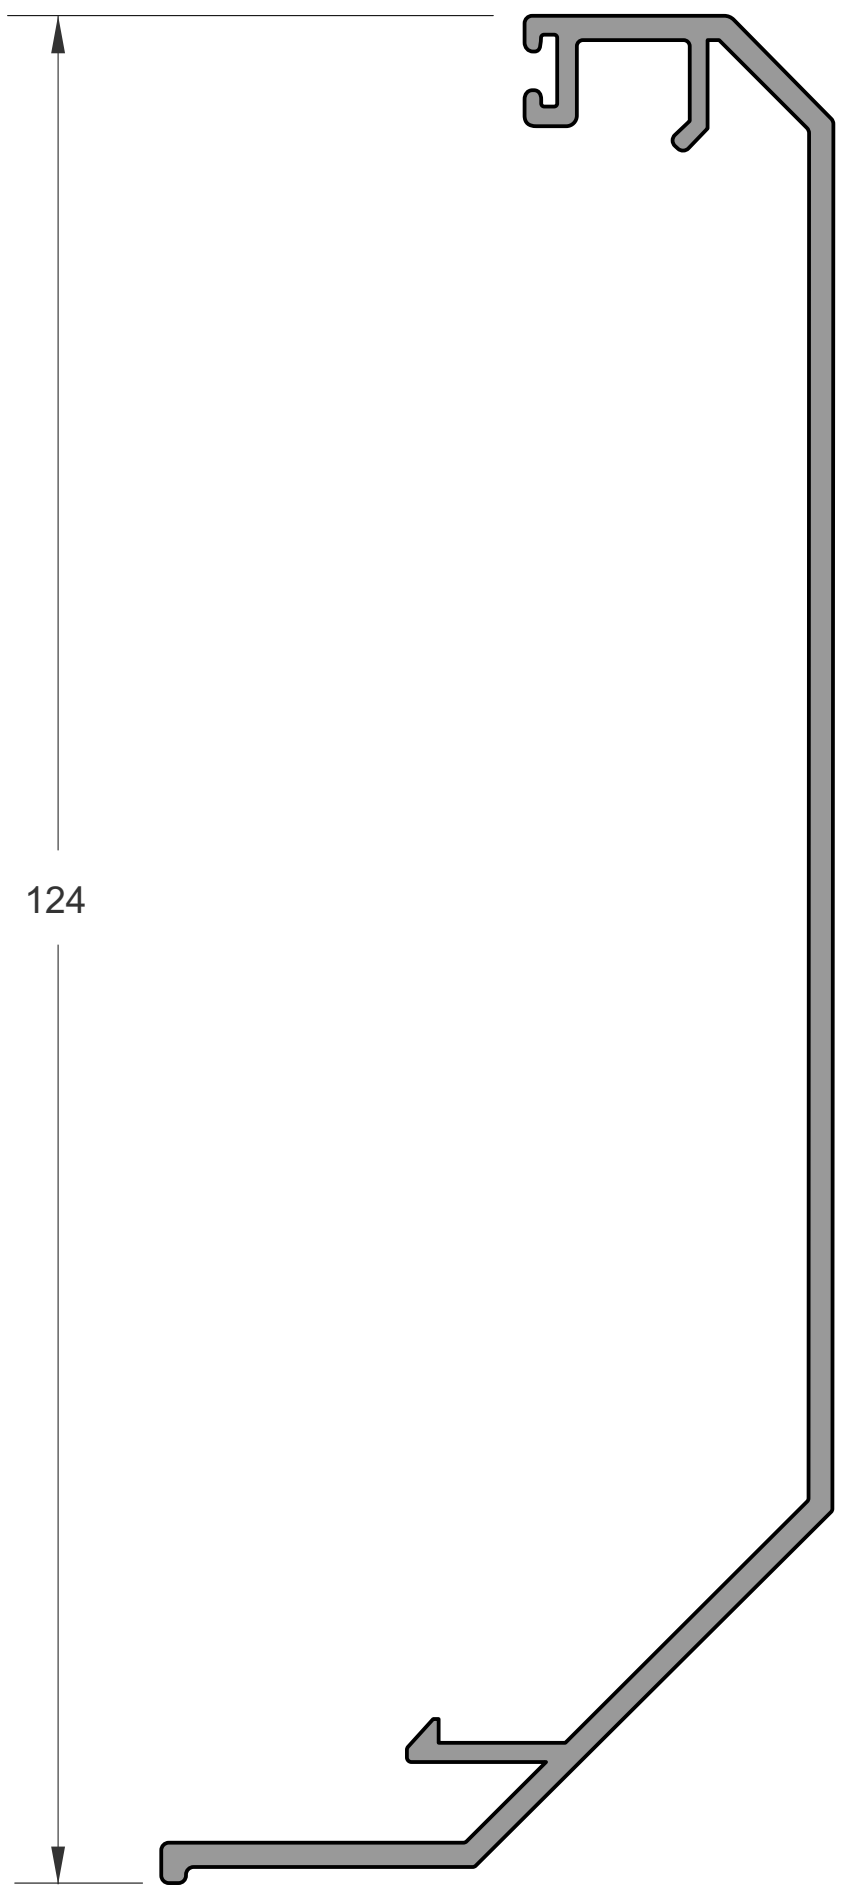

Outer Clip On Cover
JET/IB/OC

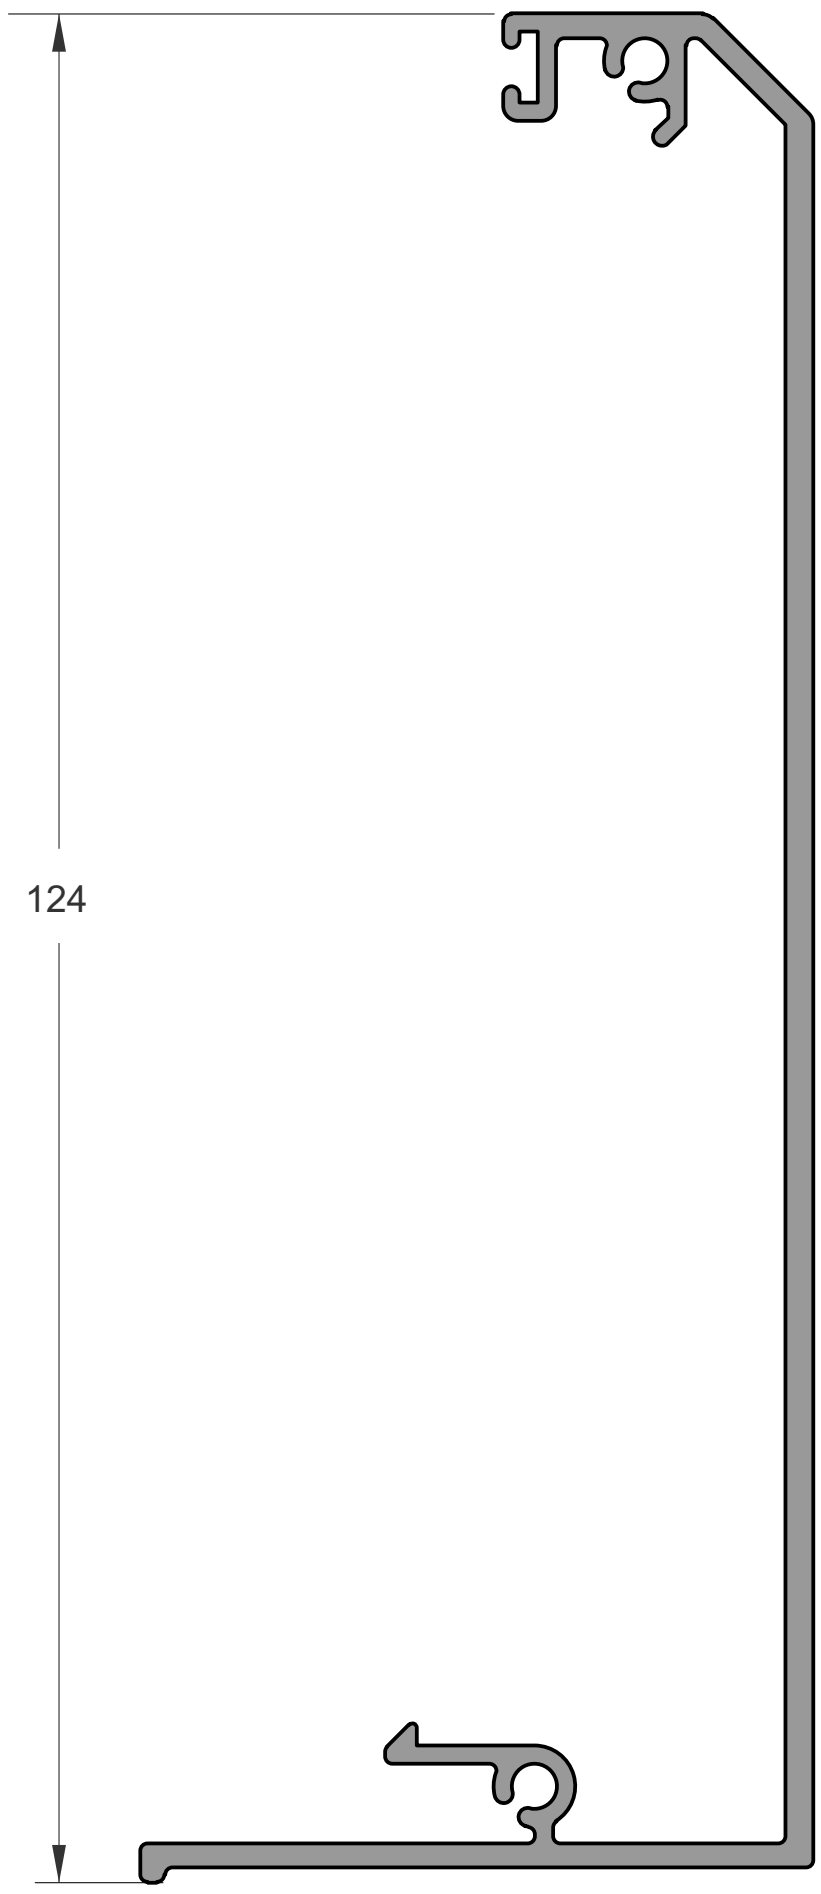

Flat Outer Clip On Cover
JET/IB/FOC

End Plate Fastening
with JET/IB/EPKIT
Face Fix

Note: Exactly the same procedure for the Flat Cover

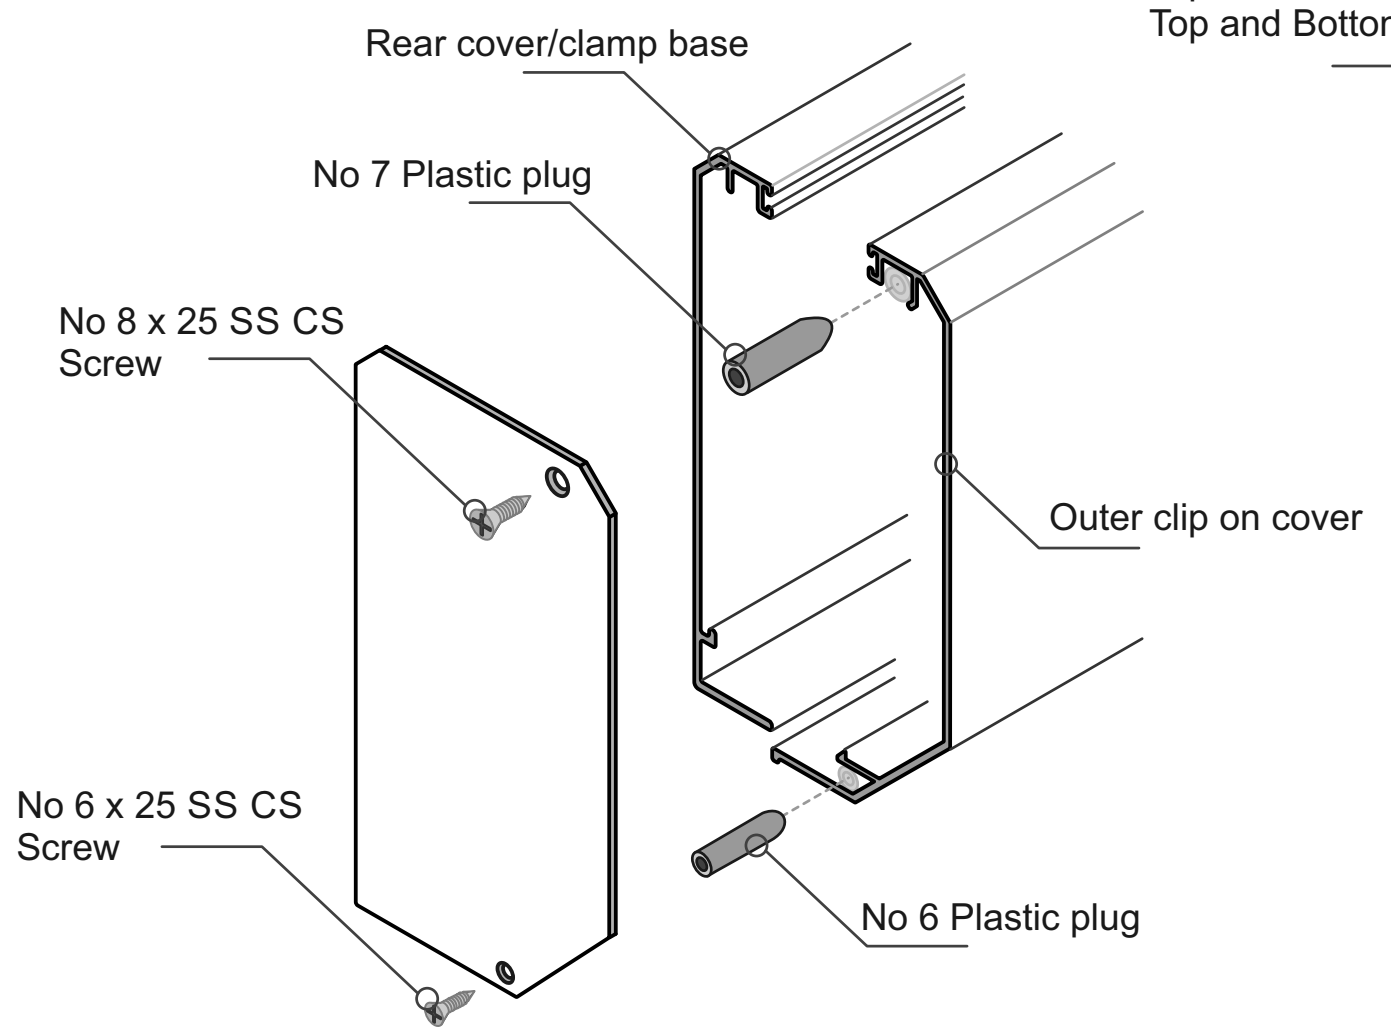

1 - EPKIT Components

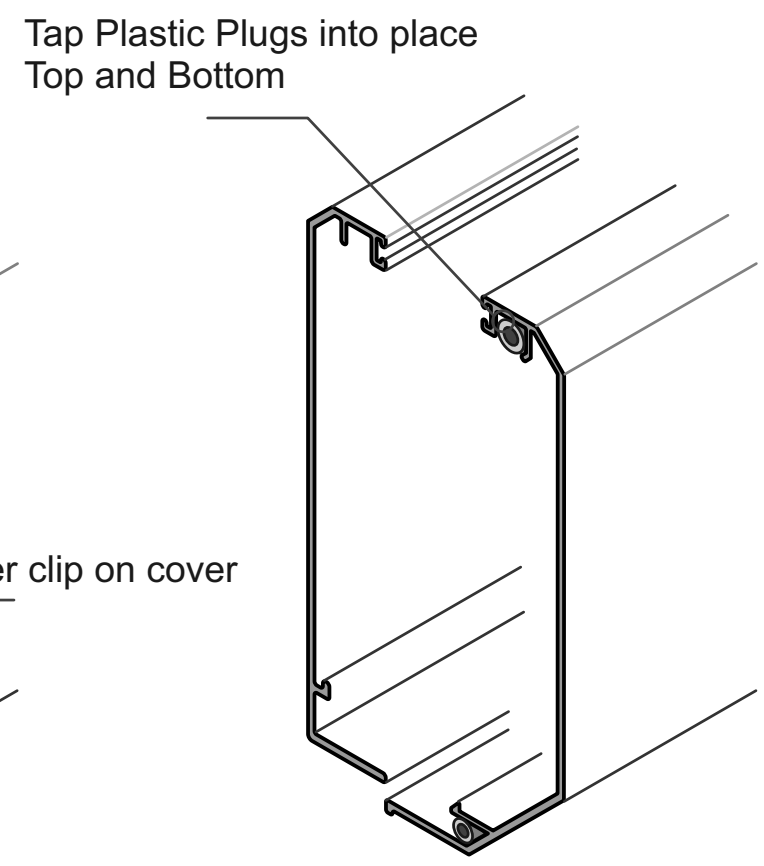

2 - Plastic Plugs tapped into place

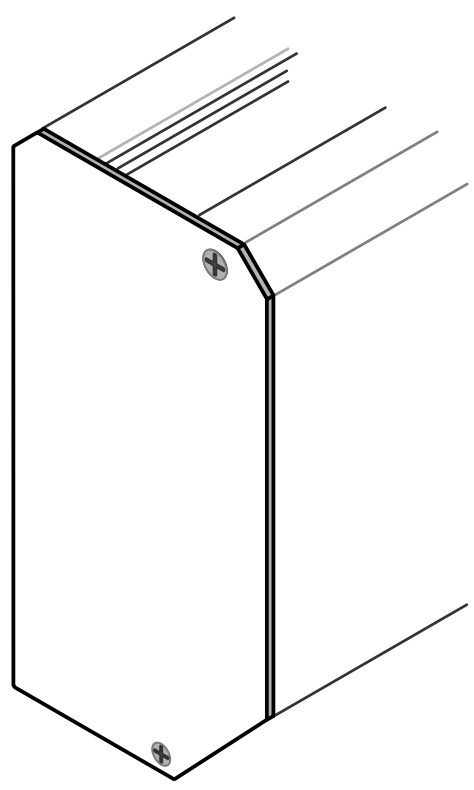

3 - End Plate screwed into place

Juralco Edgetec Infinity® Balustrade System
Face Fix Components

Clip on cover at Joint
0.9mm aluminium
Part No JET/IB/OC/E180

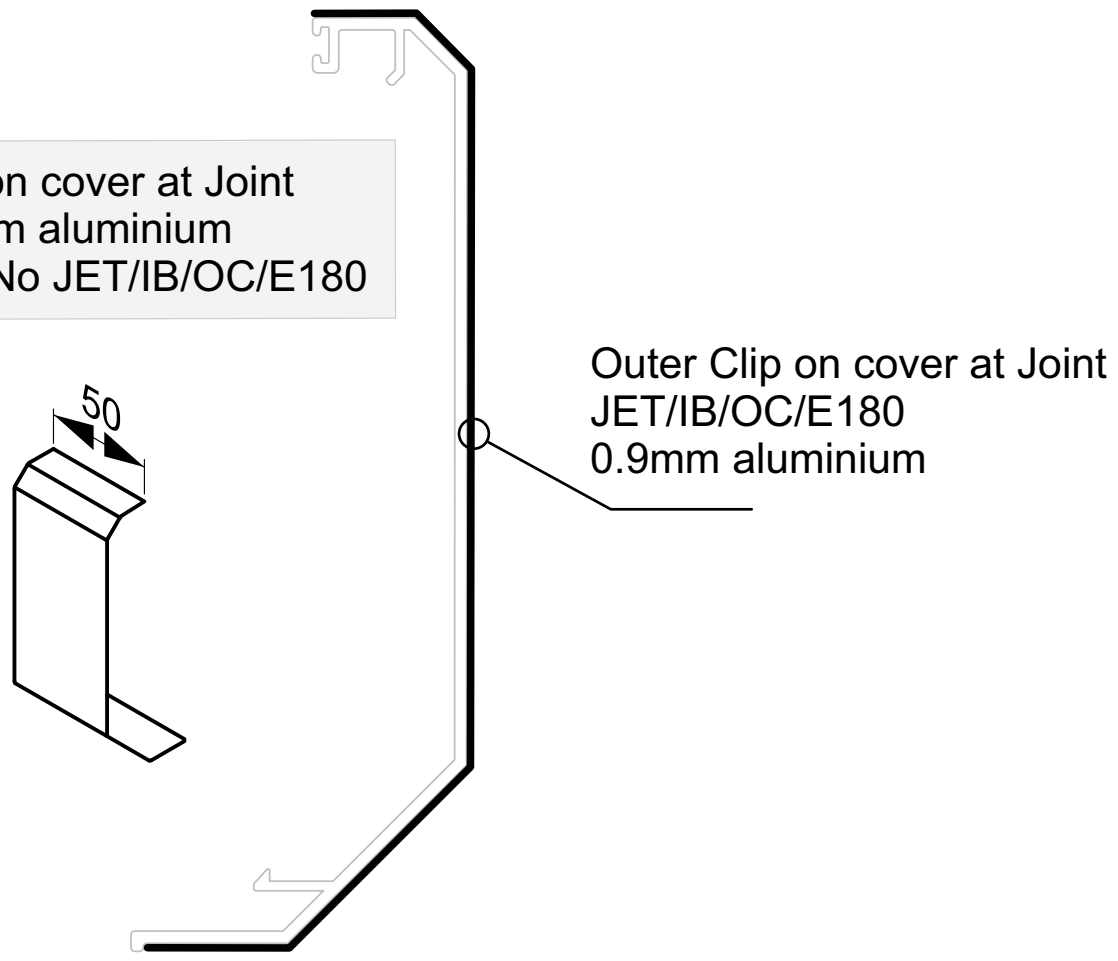

Flat clip on cover at Joint
0.9mm aluminium
Part No JET/IB/FOC/E180

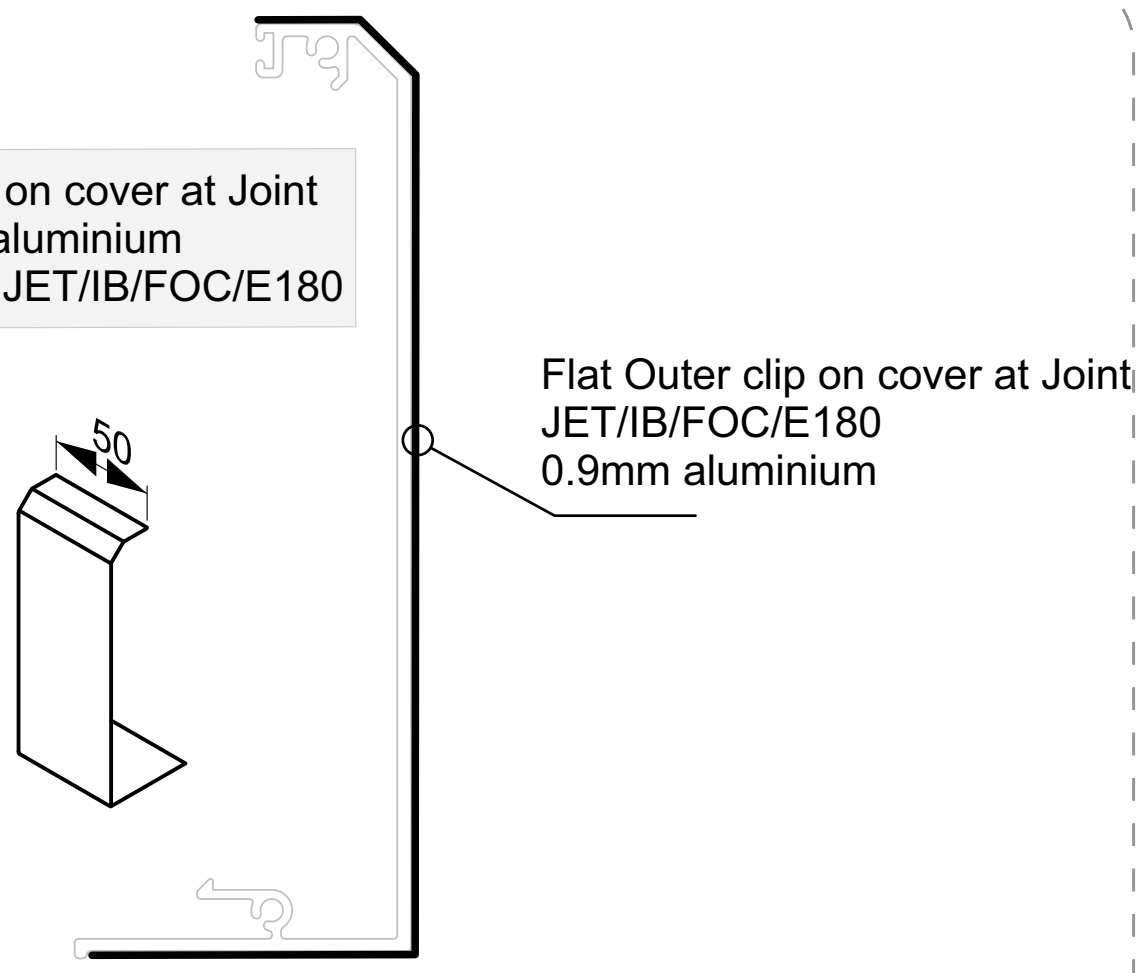

Infinity outer cover
External 90 corner
Part No JET/IB/OC/E90

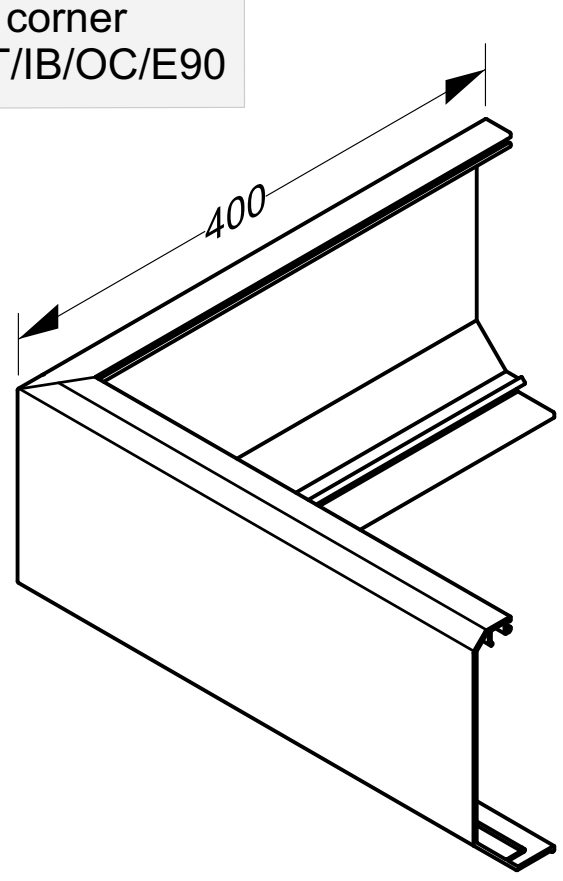

Infinity outer cover
Internal 90 corner
Part No JET/IB/OC/I90

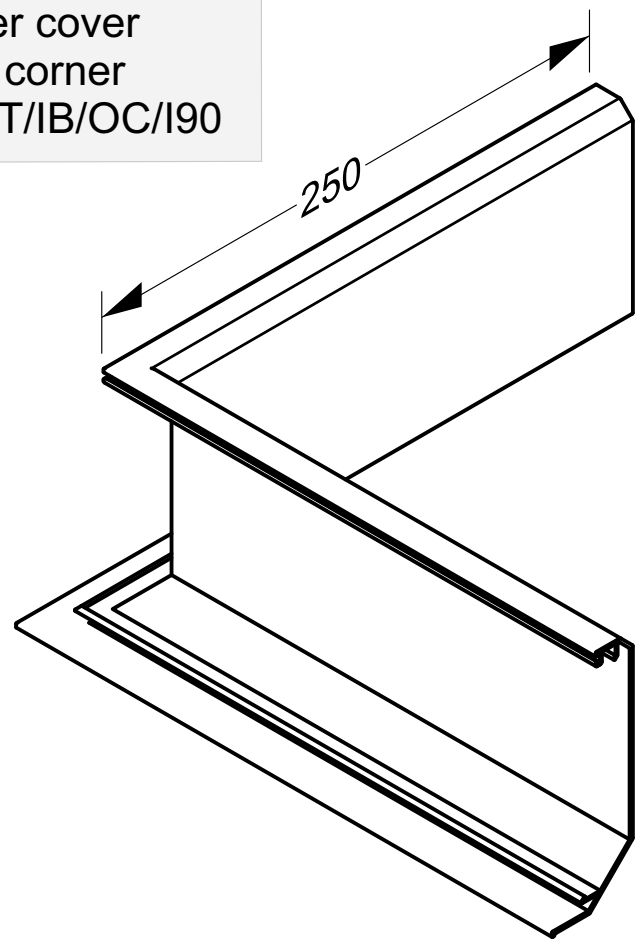

Infinity SQ outer cover
External 90 corner
Part No JET/IB/FOC/E90

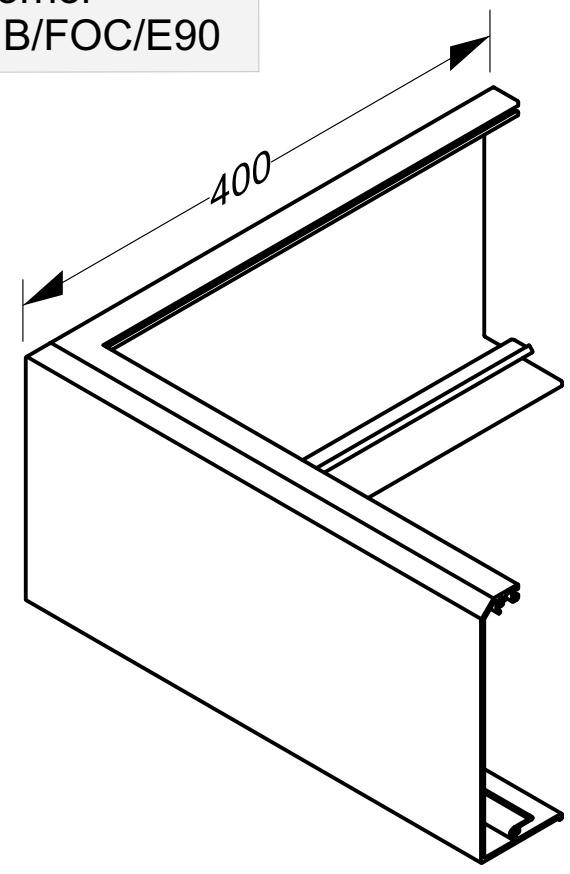

Infinity SQ outer cover
Internal 90 corner
Part No JET/IB/FOC/I90

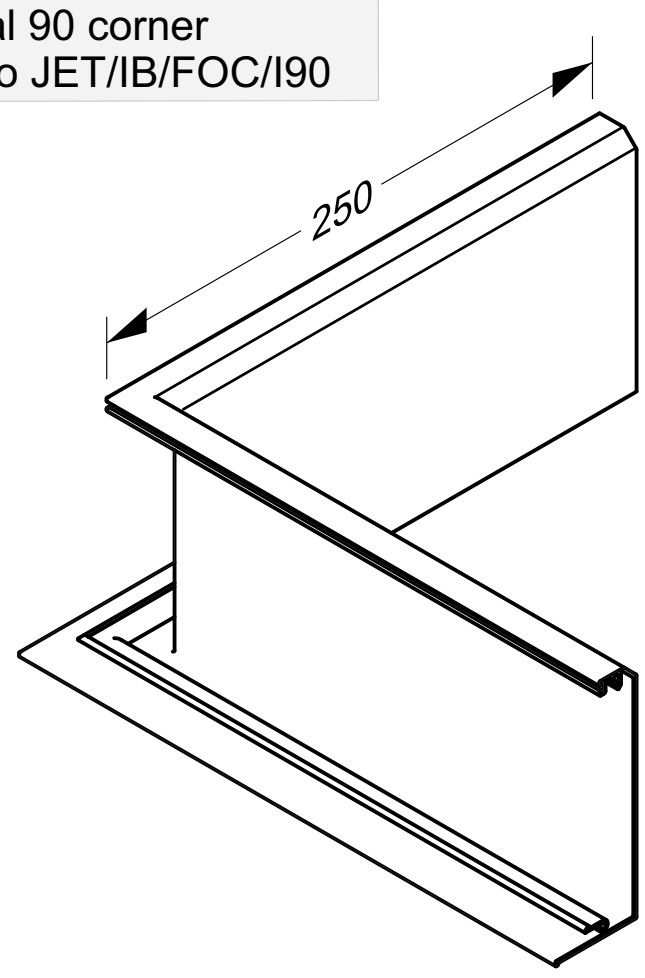

Juralco Edgetec Infinity® Balustrade System
Face Fix Components

Extrusion End Plate
Part No JET/IB/EPKIT



Kit Includes
No7 Plastic plug + 8g x 25 SS CS Screw
No 6 Plastic plug + 6g x 25 SS CS Screw

Flat Cover End Plate
Part No JET/IB/FEP



For Flat Outer Cover - Kit Includes
No7 Plastic plug + 8g x 25 SS CS Screw
No 6 Plastic plug + 6g x 25 SS CS Screw

Rear Spacer Plate
100 wide x 94 deep

Use only if required



1mm thick Plate - Part No JET/IB/CSP/1.0
5mm thick Plate - Part No JET/IB/CSP/5.0

Glass Gasket Extrusions
Front and Rear

Front 100 wide, Part No JET/IB/GS/12
Rear 150 wide, Part No JET/IB/GS/15

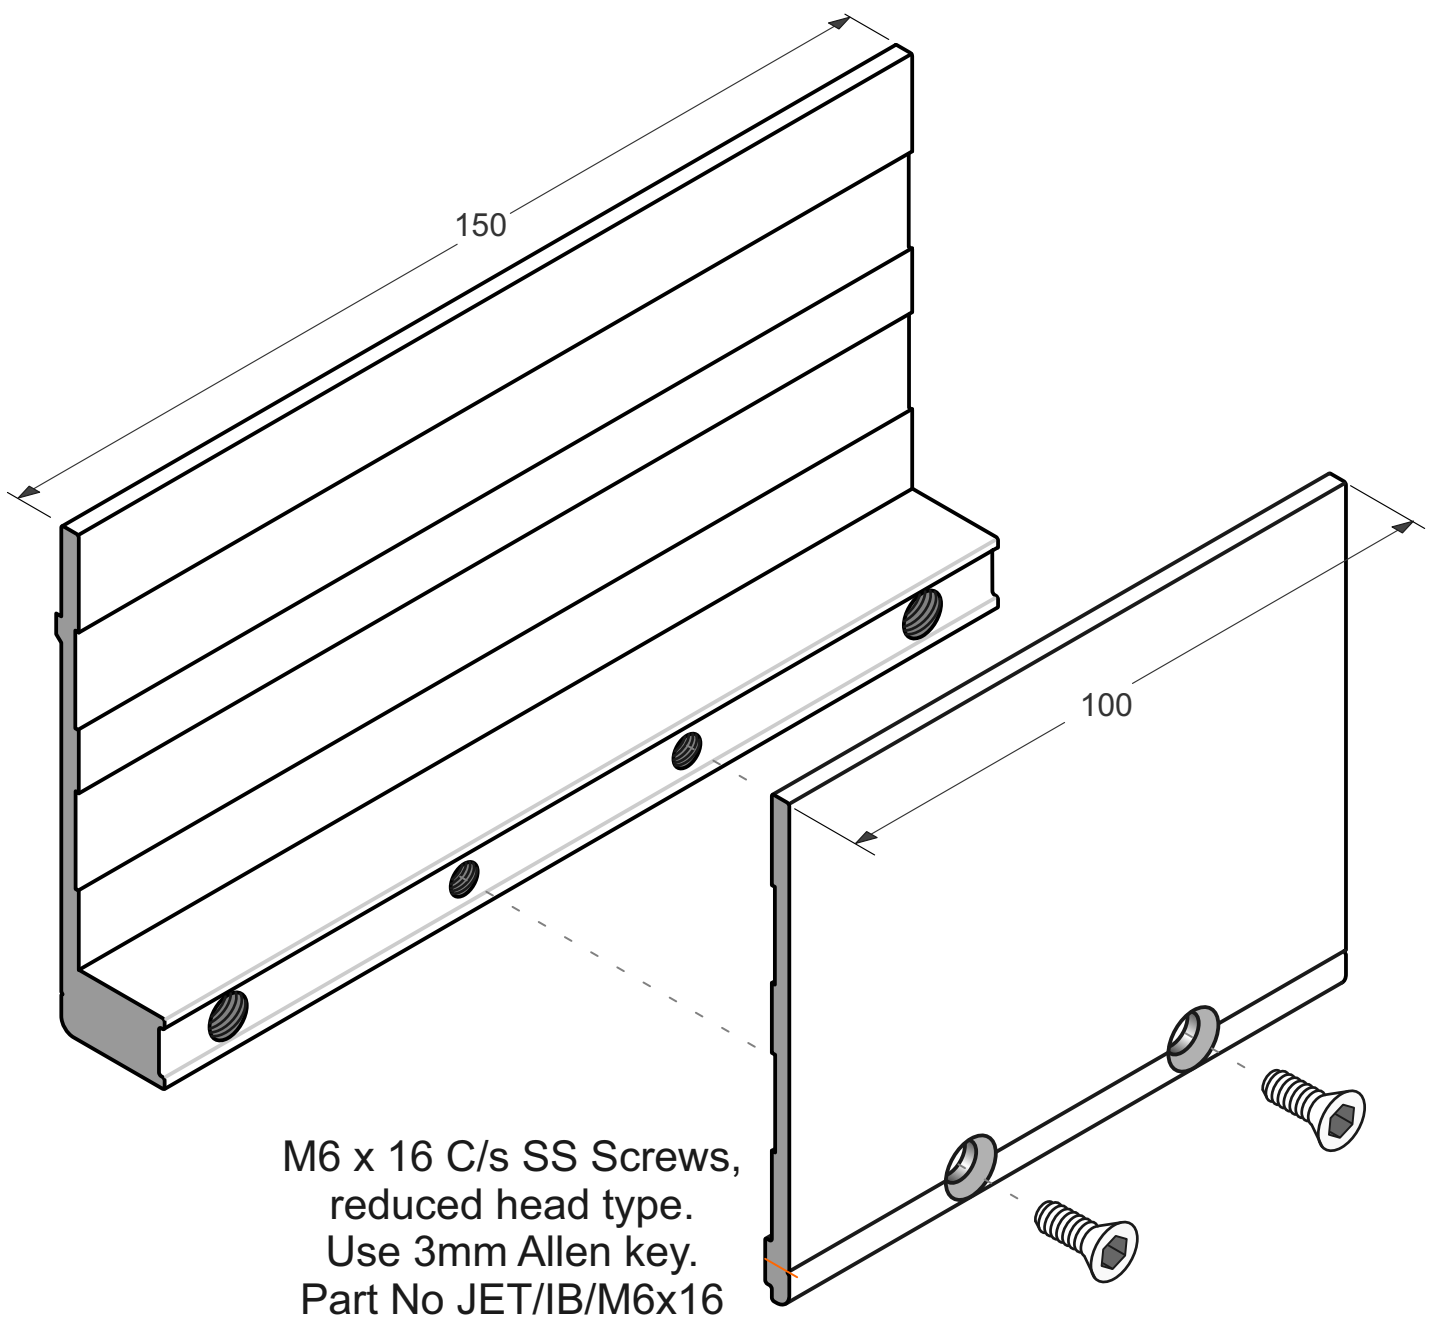

M6 x 16 C/s SS Screws,
reduced head type.
Use 3mm Allen key.
Part No JET/IB/M6x16

Rear Spacer Plate 15mm
Part No JET/IB/CSP/15

For use on Timber Decks



100 wide x 94 high x 15mm thick

Glass Bulb Seal
Part No JET/IB/CVRBLB250



Glass Gaskets
1mm and 2mm

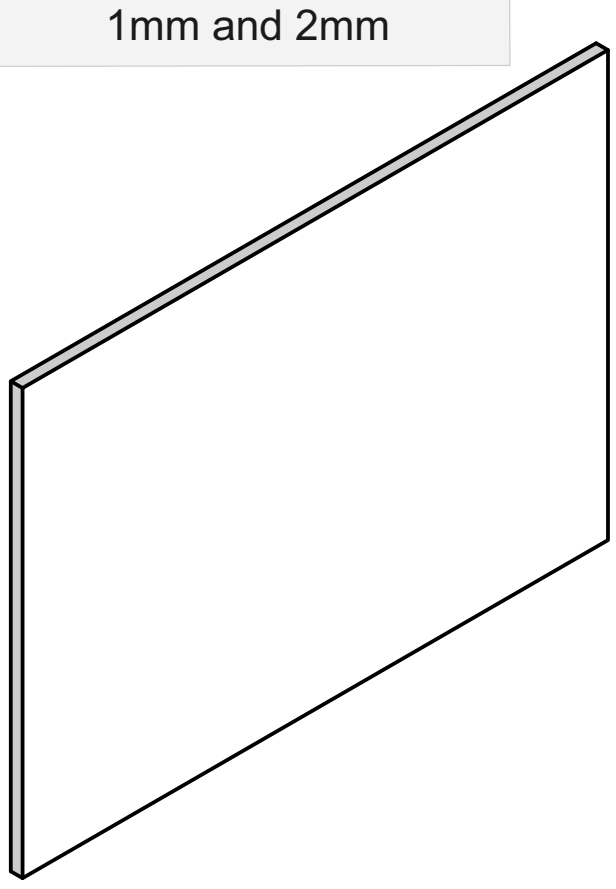

Gasket Schedule	
12mm Toughened	Use 2 x 2mm Gaskets
13.52mm SentryGlas	
15mm Toughened	Use 2 x 1mm Gaskets
15.2mm Laminated	
17.2mm Laminated	
17.52mm SentryGlas	

Gasket 2mm Thick	Front 100 wide, Part No JET/IB/GGF2 Rear 150 wide, Part No JET/IB/GGR2

Gasket 1mm Thick	Front 100 wide, Part No JET/IB/GGF1 Rear 150 wide, Part No JET/IB/GGR1

SIKA Supergrip
Part No JECSUPERGRIP30



For All Coachscrews fixings

Rhodorsil V60 Clear Silicone
Part No H/RTV419098



Construction Silicone

Approved Timber Construction Options

Face Fix into Double Joist

M12 SS Bolts or Threaded Rod - All Wind Zones
M12 SS Lagscrews - All Wind Zones
M12 SS Coachscrews - Up to and Incl Very High Wind Zone only
Note: All Lag/Coachscrews 90mm min Screw engagement into Joists

Approved Timber Construction Options

Face Fix into Triple Joist

M12 SS Bolts or Threaded Rod - All Wind Zones
M12 SS Coachscrews - All Wind Zones
Note: All Coachscrews 130mm min Screw engagement into Joists

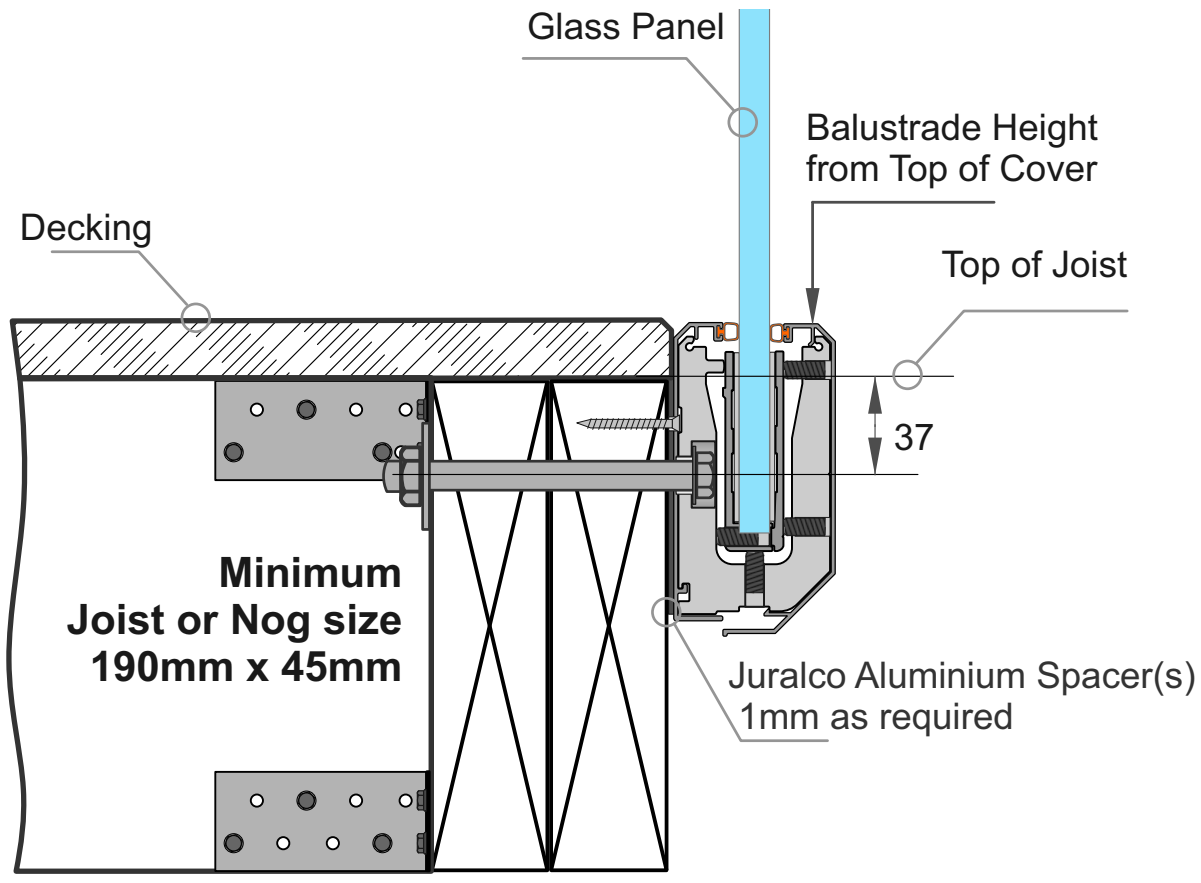

1 - Attach Directly to Double or Triple Joists using 1mm alignment Spacers

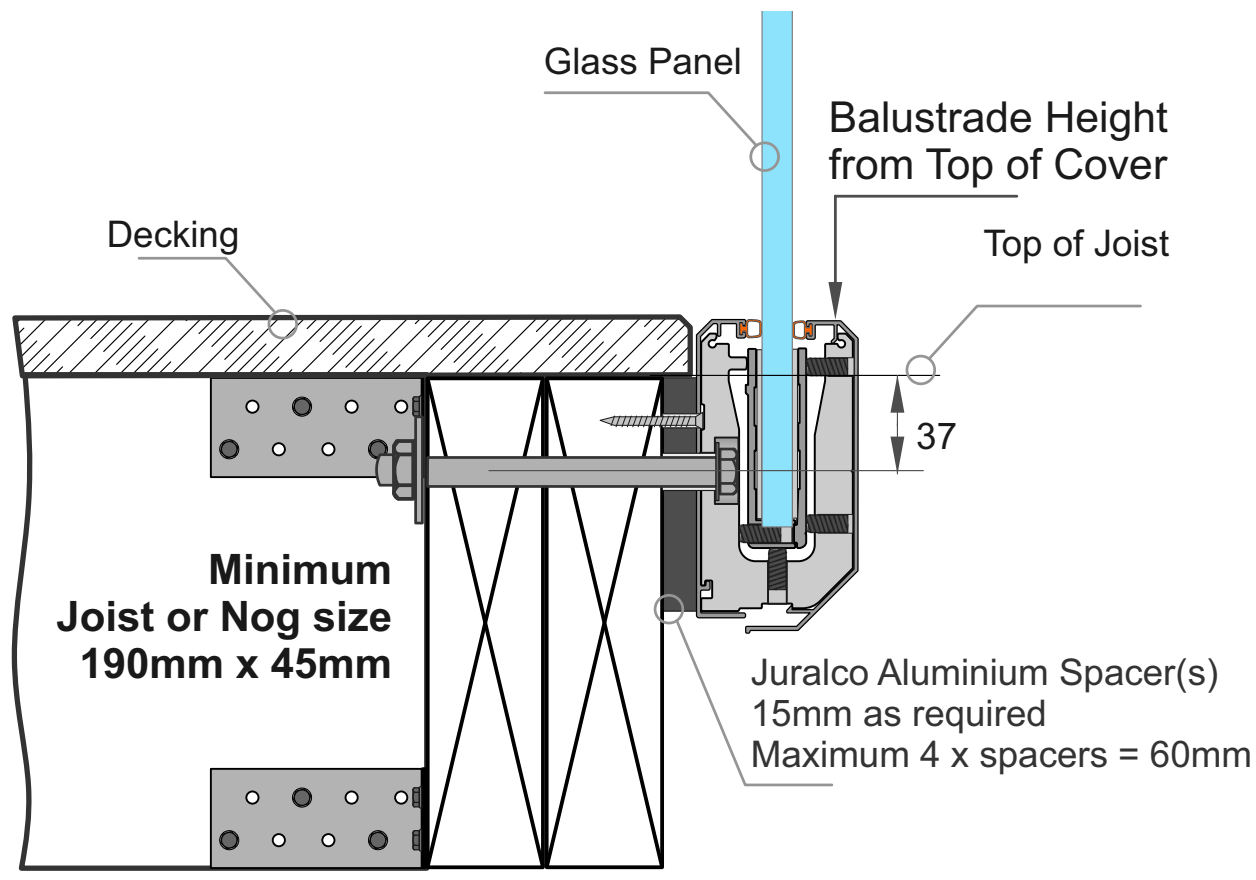

2- Attach Directly to Double or Triple Joists using 15mm Spacers.

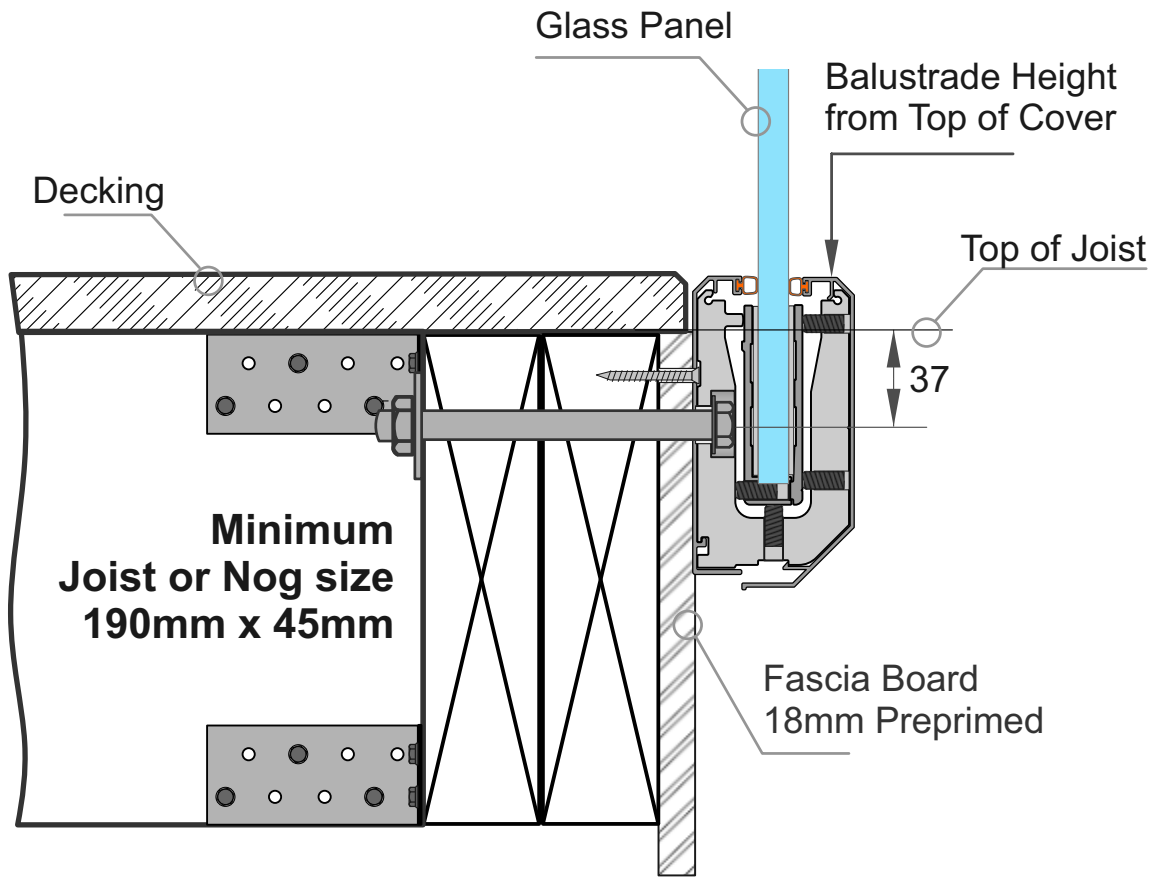

3 - Attach Directly to a Fascia then Double or Triple Joists

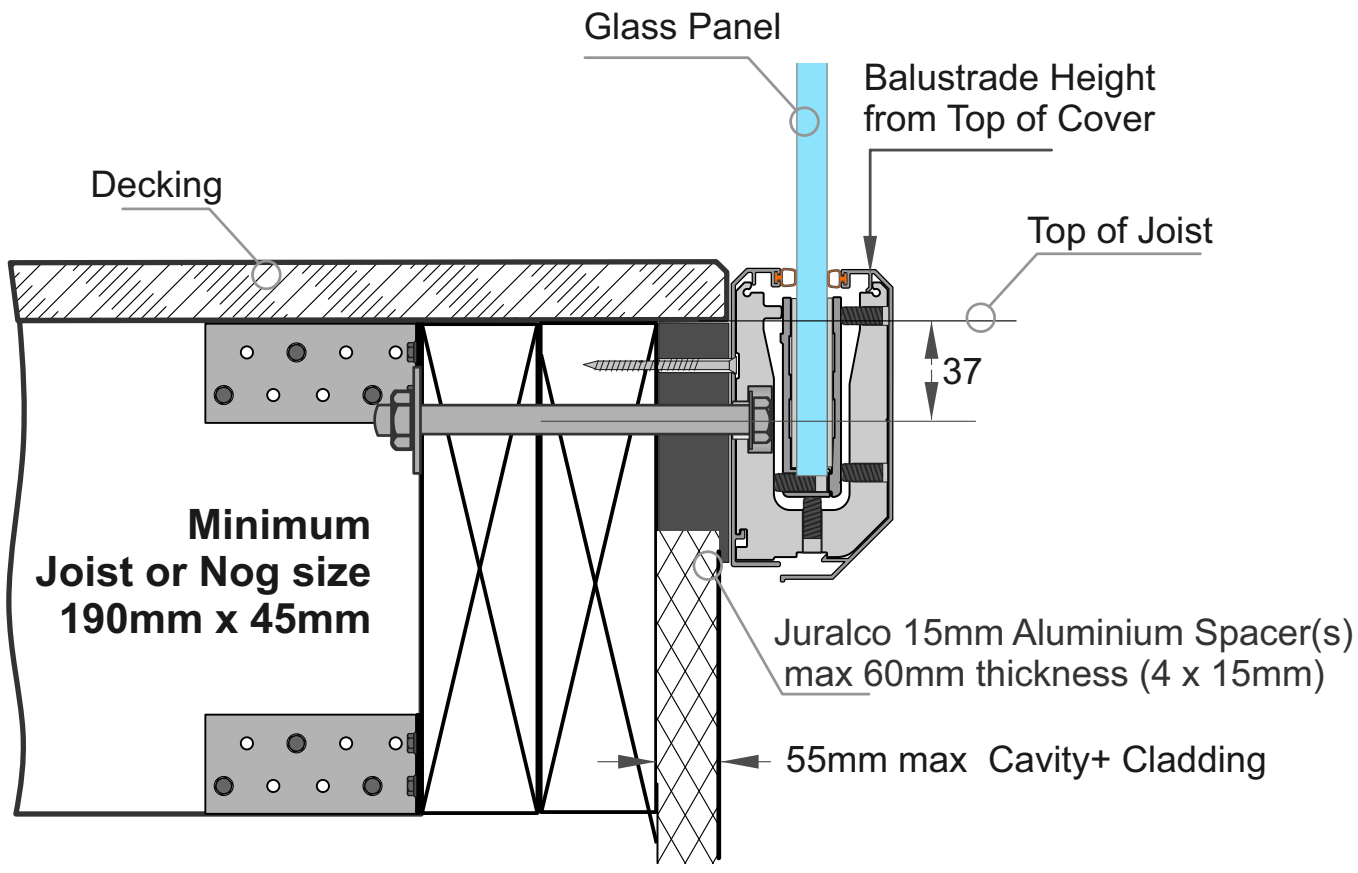

4 - Attach through Cavity Wall to Double or Triple Joists using 15mm Spacers (60mm max)

Rear Spacer Plates
94 high x 100 wide



1mm thick Plate
Part No JET/IB/CSP/1.0

5mm thick Plate
Part No JET/IB/CSP/5.0



15mm thick Plate
Part No JET/IB/CSP/15

Typical FACE Fix to Timber - M12 SS Lag/Coachscrew

Complies with NZS3604:2011 - Double Boundary Joists

Up to and including Very High Wind Zone Residential A, A Other and C3 only			Up to and including Extra High Wind Zone Residential A, A Other and C3 only		
Glass Thickness, Type	Balustrade Height (max)	Clamp Spacing (max)	Glass Thickness, Type	Balustrade Height (max)	Clamp Spacing (max)
12 T	1200	500	12 T	1000	500
15.2 L	1150	500			
13.52SG	1050	350			

All these, incl Pools Lag/Coachscrew attach OK

Height/Spacings for this mounting type only

Up to and including Very High Wind Zone Pool Fence only			Up to and including Extra High Wind Zone Pool Fence only		
Glass Thickness, Type	Fence Height (max)	Clamp Spacing (max)	Glass Thickness, Type	Fence Height (max)	Clamp Spacing (max)
12T	1250	500	15T	1250	500

Applies to Pool Fences not protecting a fall of 1.0m or more

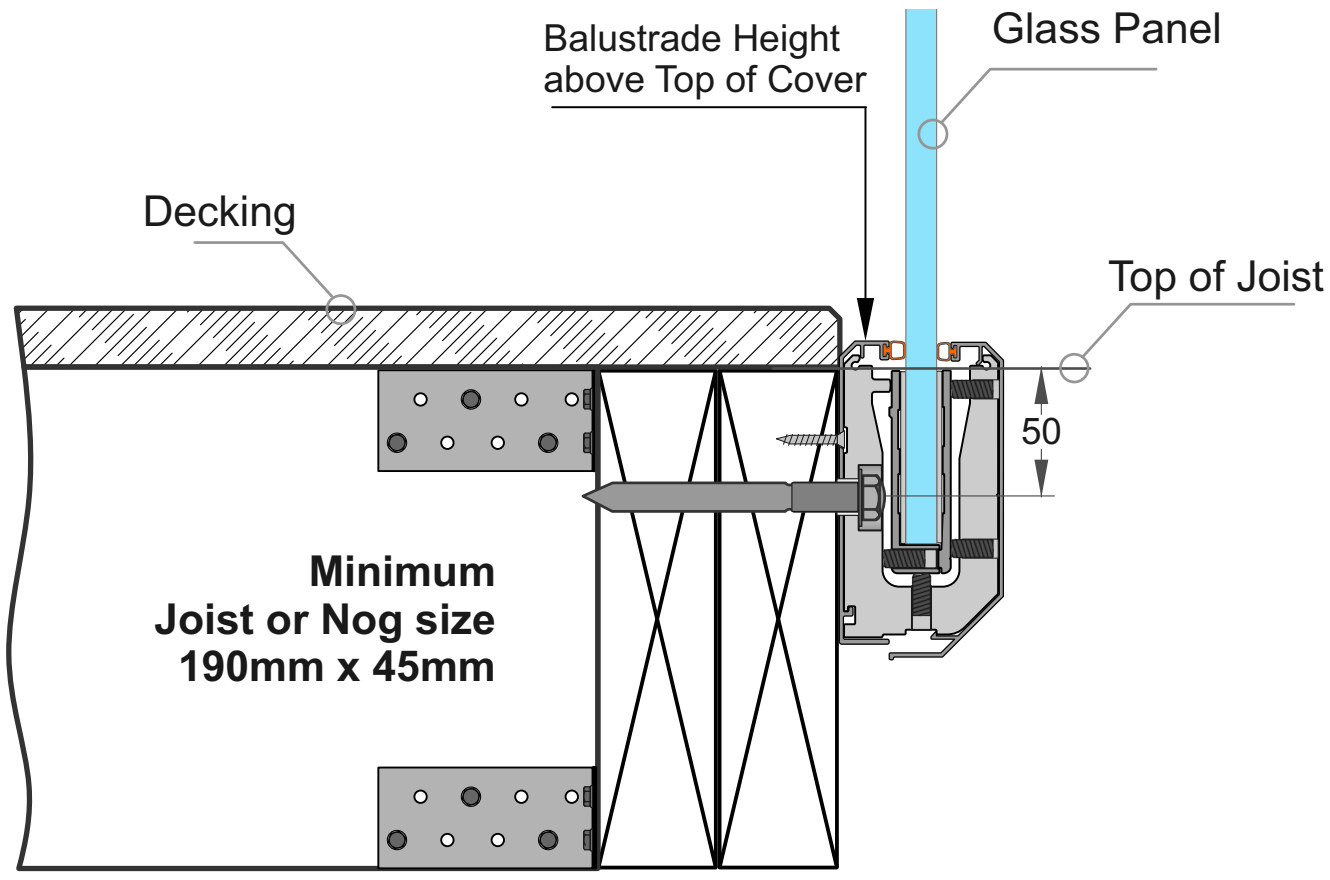

See Approved Face Fix Options page

General Notes:

1 - Glass thickness, mm
Glass type T= Toughened, L = Laminated, SG = SentryGlas
2 - All measurements mm
3 - Refer to Elevations for Max Panel widths.
Use of Top Interlinking Rails (T and L only) or Stiffener Brackets (L and SG only)

Important Installation notes:
1 - The Project Engineer must ensure the structure can support the appropriate loads
2 - Substructure shown indicatively only. Timber SG8 minimum strength
3 - Lagscrew / Coachscrew 90mm min engagement into joists, predrill 6mm holes.
4 - Bond all Screws with SIKA Supergrip to full depth
5 - All Fixings must be Stainless steel

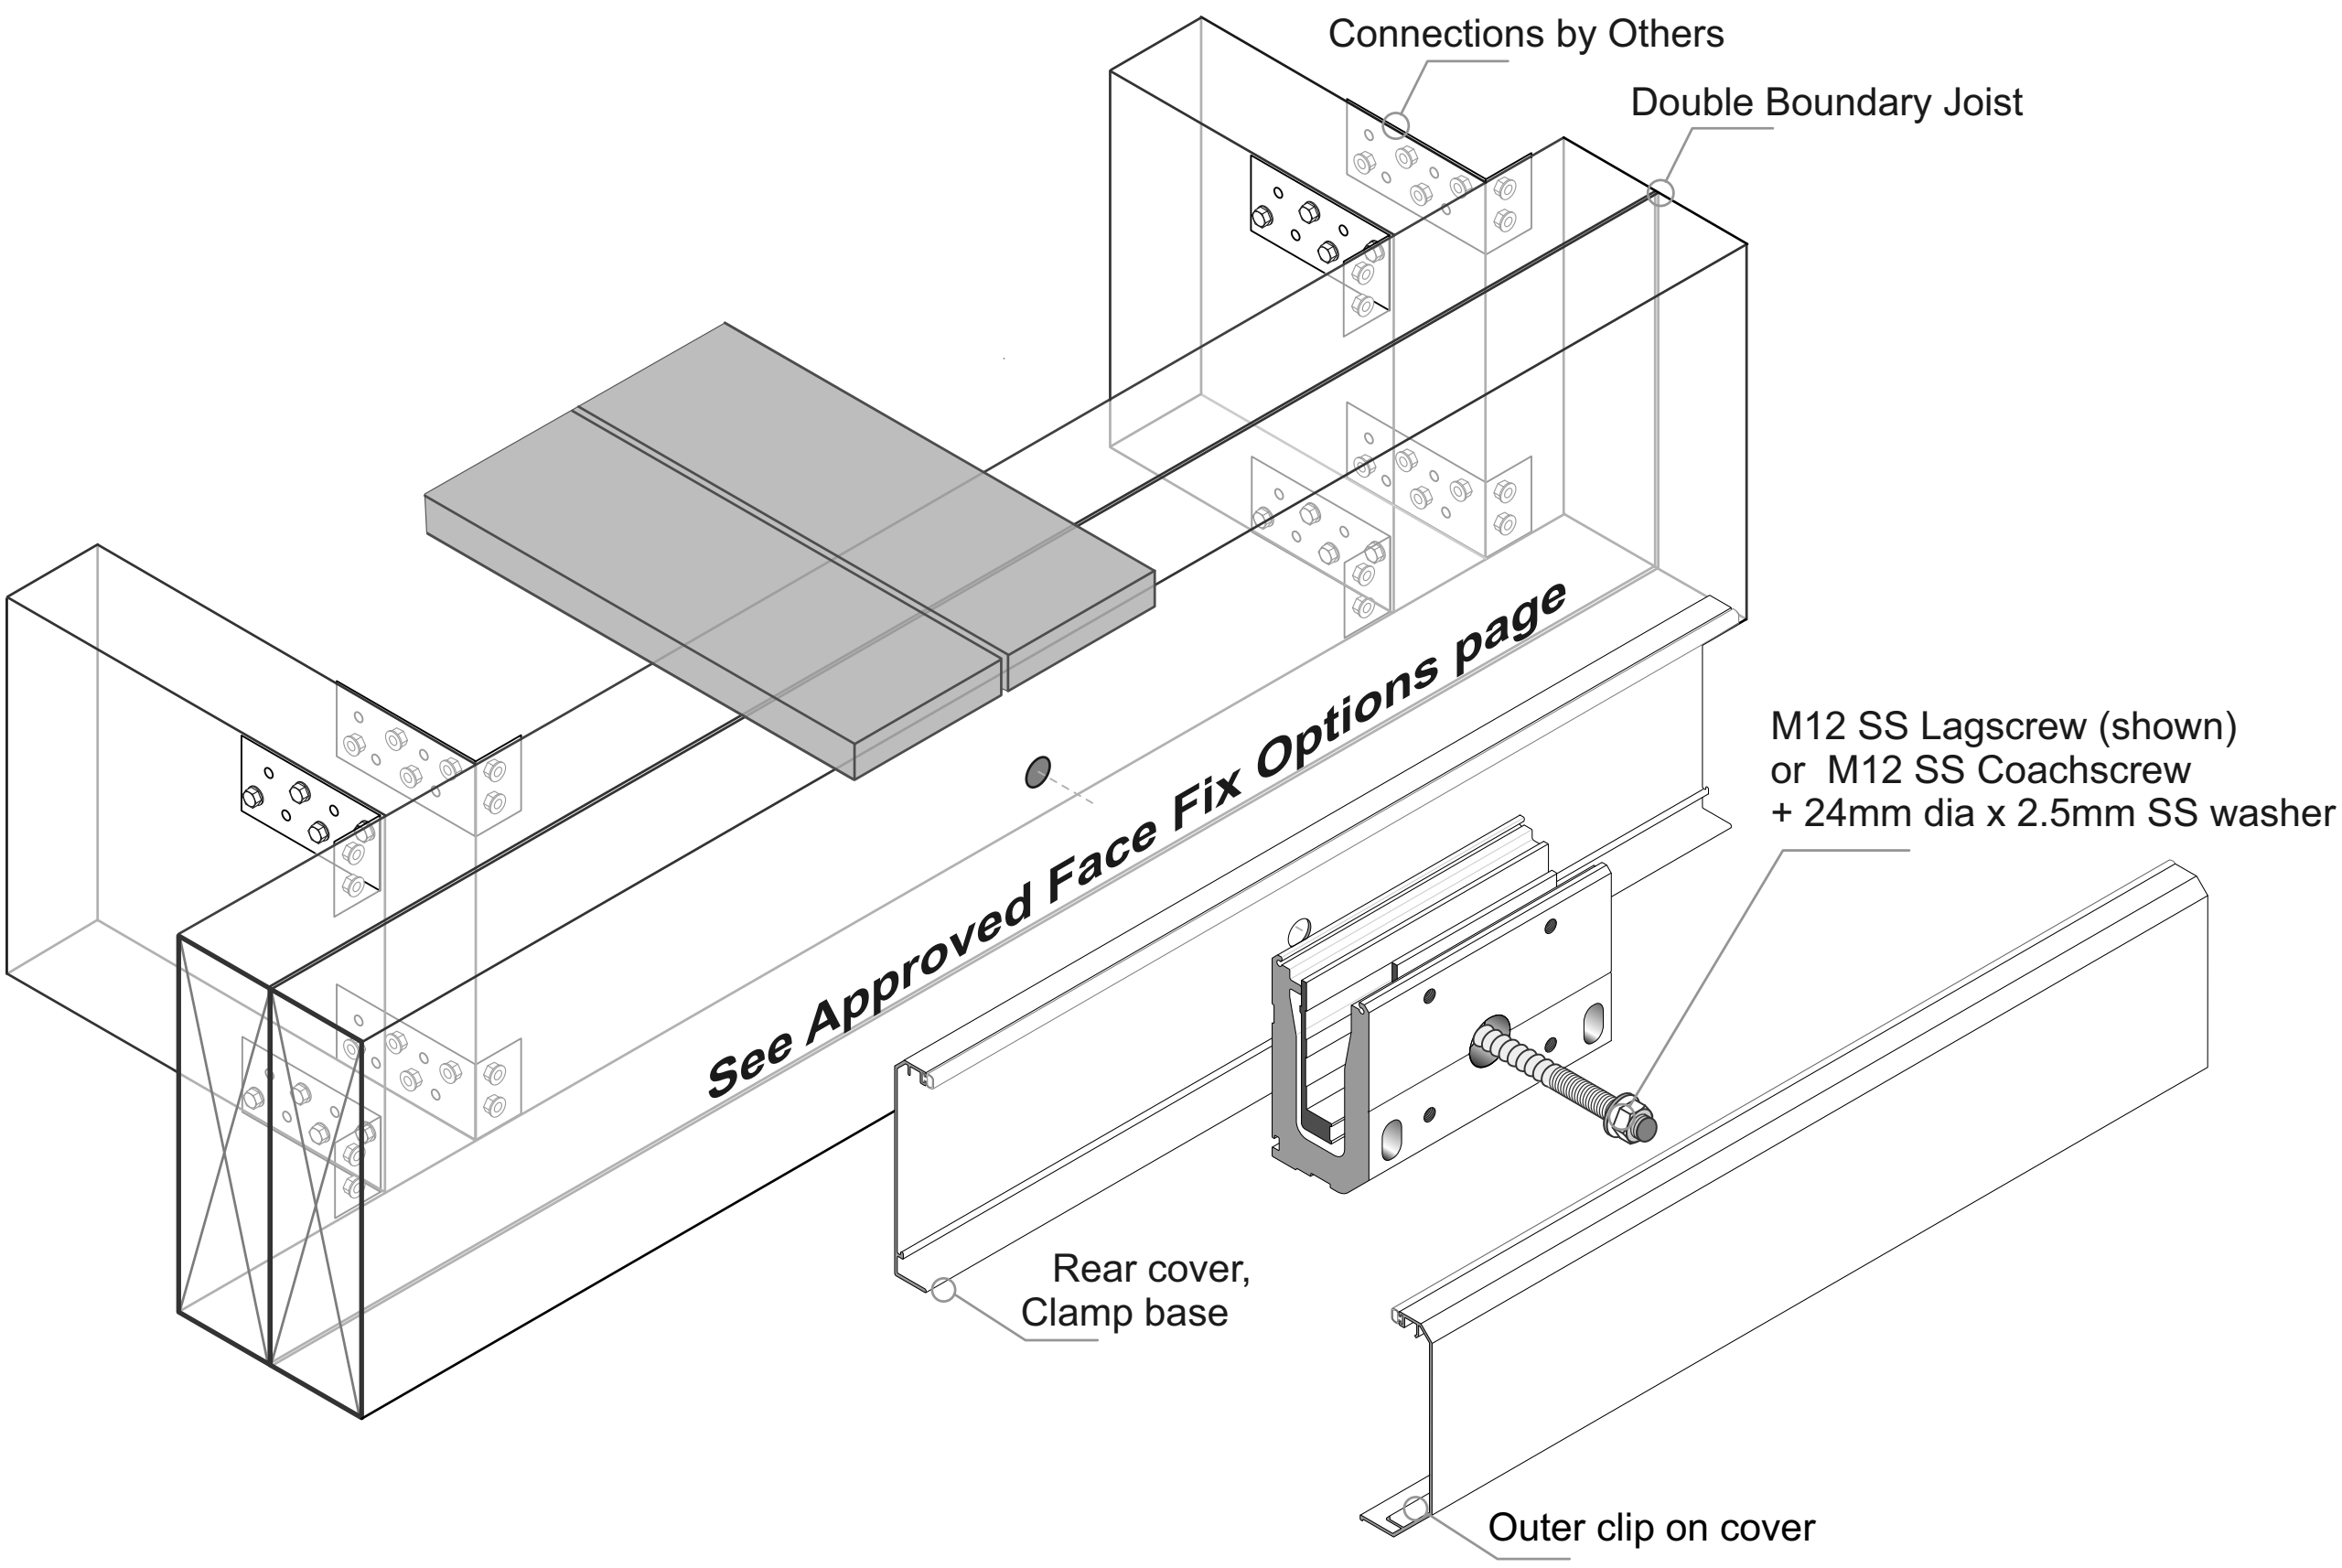

Juralco Edgetec Infinity® Balustrade System
Typical Fixing - Residential

Typical FACE Fix to Timber - M12 SS, Bolt or Threaded Rod

Complies with NZS3604:2011 - Double Boundary Joists

Up to and including Very High Wind Zone Residential A, A Other and C3 only		
Glass Thickness, Type	Balustrade Height (max)	Clamp Spacing (max)
12 T	1200	500
15.2 L	1150	500
13.52SG	1050	350

Up to and including Extra High Wind Zone Residential A, A Other and C3 only		
Glass Thickness, Type	Balustrade Height (max)	Clamp Spacing (max)
12 T	1000	500

Height/Spacings for this mounting type only

Applies to Pool Fences not protecting a fall of 1.0m or more

Up to and including Very High Wind Zone Pool Fence only		
Glass Thickness, Type	Fence Height (max)	Clamp Spacing (max)
12T	1250	500

Up to and including Extra High Wind Zone Pool Fence only		
Glass Thickness, Type	Fence Height (max)	Clamp Spacing (max)
15T	1250	500

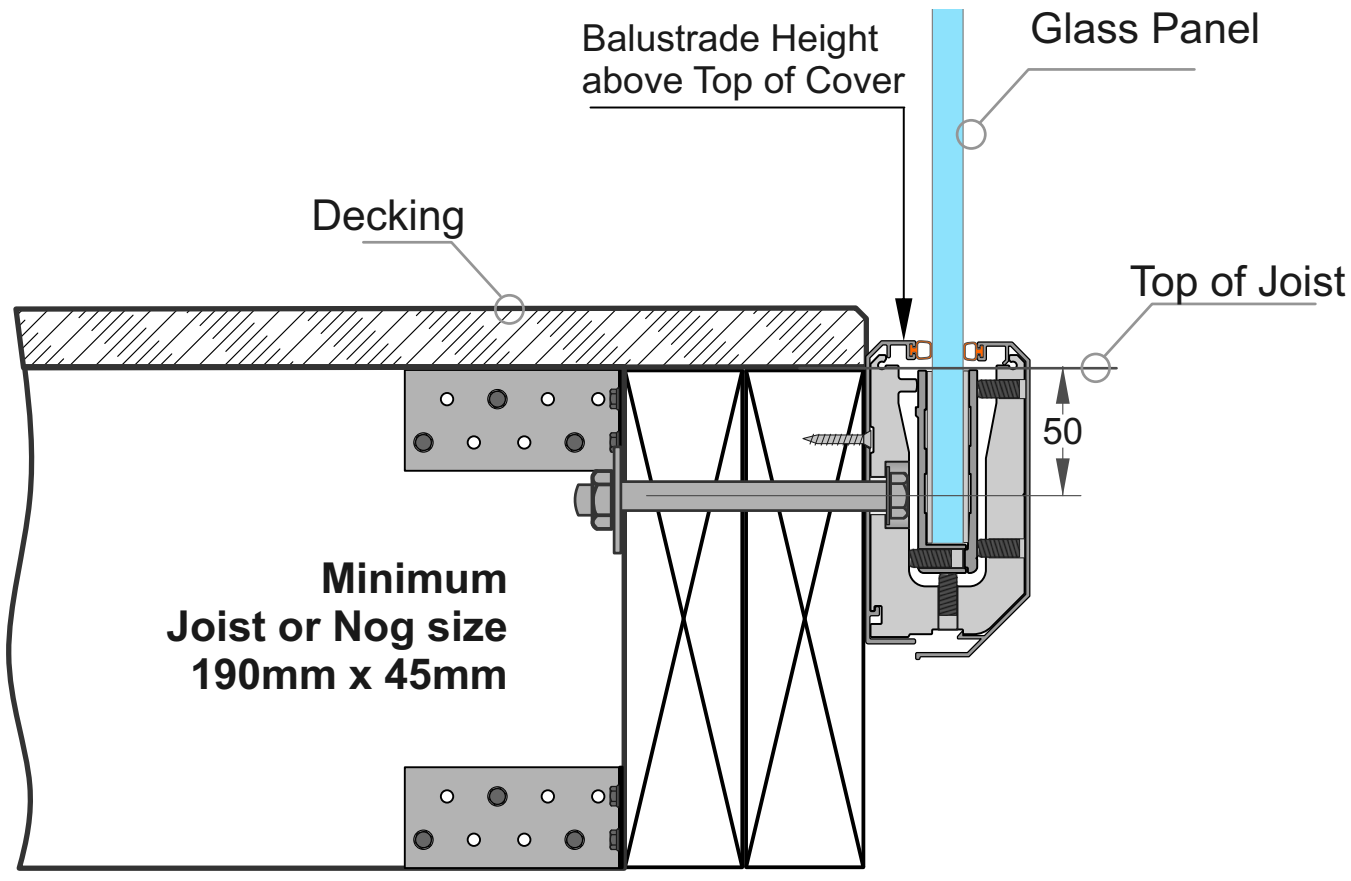

See Approved Face Fix Options page

General Notes:
1 - Glass thickness, mm
 Glass type T= Toughened, L = Laminated, SG = SentryGlas
2 - All measurements mm
3 - Refer to Elevations for Max Panel widths.
 Use of Top Interlinking Rails (T and L only) or Stiffener Brackets (L and SG only)

Important Installation notes:
1 - The Project Engineer must ensure the structure can support the appropriate loads
2 - Substructure shown indicatively only. Timber SG8 minimum strength
3 - All Fixings must be Stainless steel

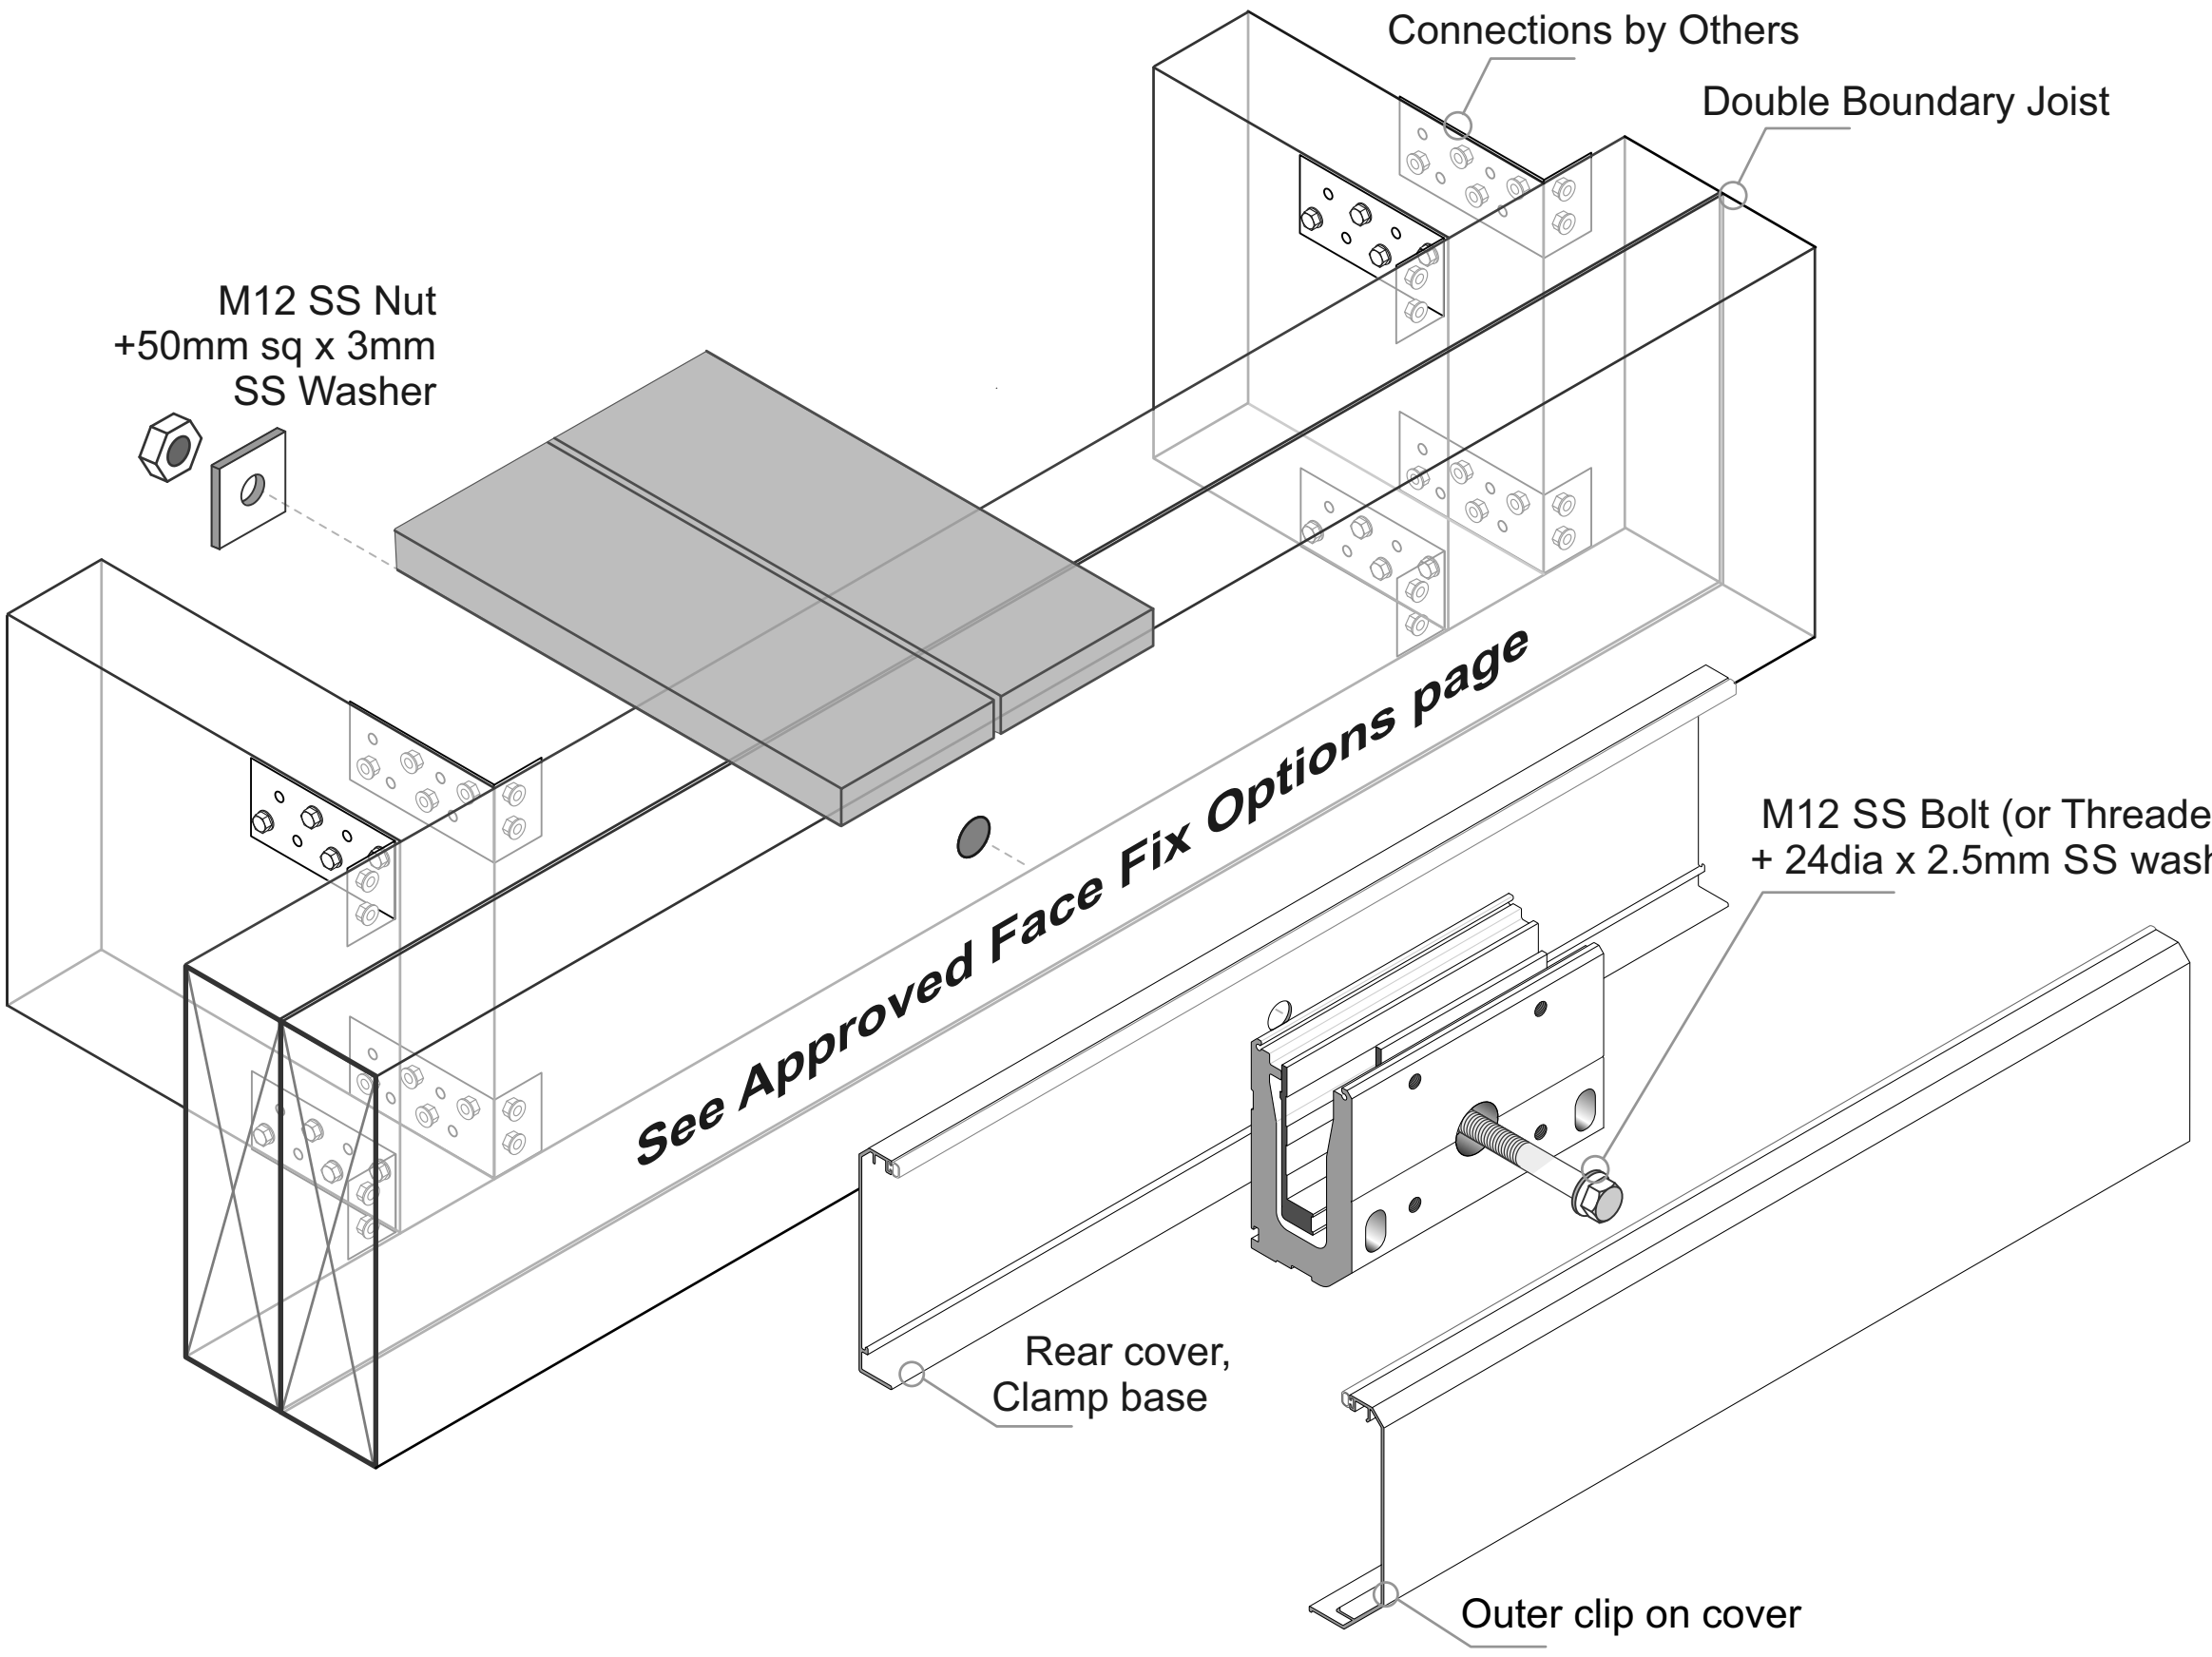

This page applies to 12mm Toughened Glass only

25mm SS Interlinking Top Rail

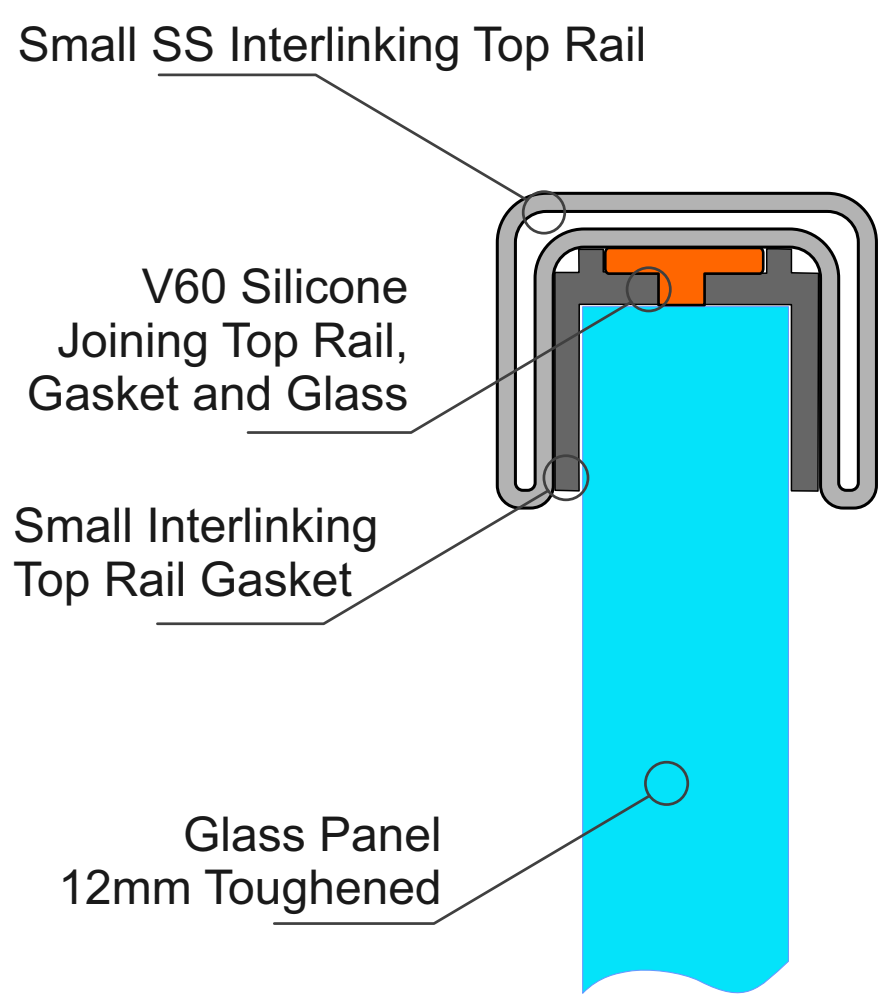

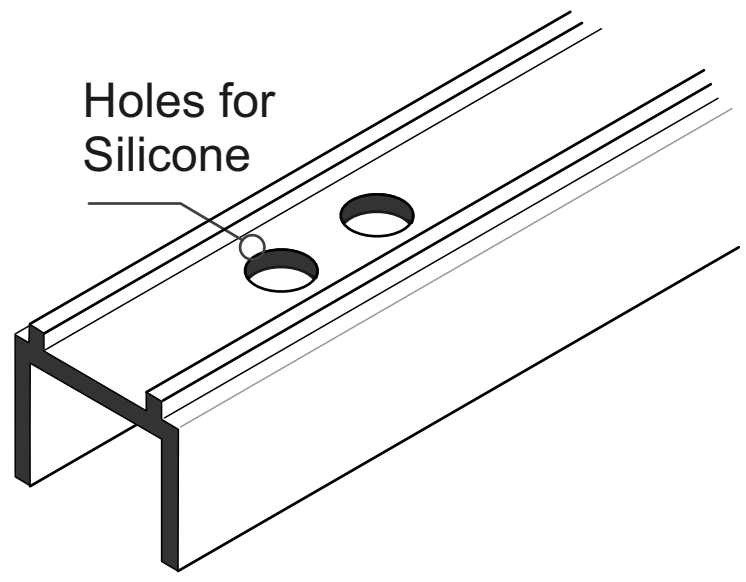

SMALL SS INTERLINKING
TOP RAIL GASKET
JET/490GT/12/2.9 (Black)



SMALL SS INTERLINKING TOP RAIL
JET/490/5.8/SSS JET/490/5.8/SCC
Duplex 2205

25mm SS Interlinking Rail Connections

Note : All these Brackets use M5 x 6 SS Grub Screws.
If necessary these holes must be Drilled + tapped M5, as shown.
The under side of the Interlinking Rail must be drilled
M6 to match M5 tapped holes positions, for access to Grub screws
- Joins, where required must be at the end of Glass Panels
Available as Satin(SSS) or Powdercoated SCC finishes

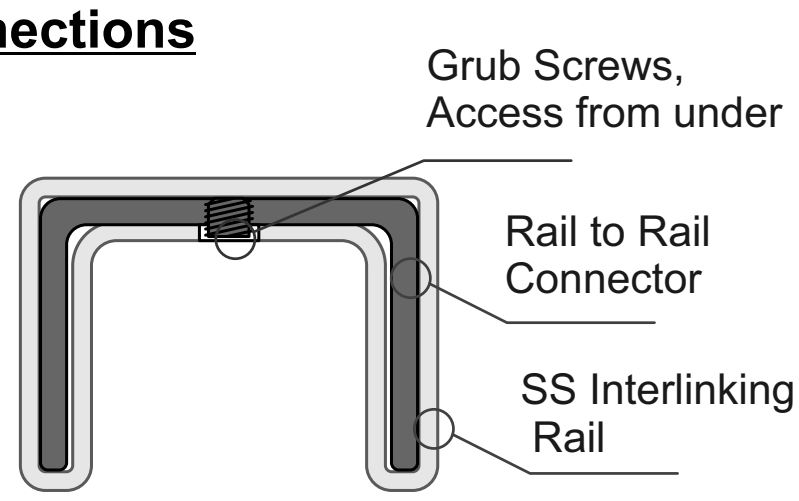



180deg INLINE JOINER
Duplex 2205
JET491/SSS JET491/SCC
21mm x 25mm x 51mm deep



END CAP Duplex 2205
JET492/SSS JET492/SCC
21mm x 25mm x 25mm deep



90deg JOINER Duplex 2205
JET493/SSS JET493/SCC
21mm x 80mm x 80mm



+90 to - 45 deg ADJUSTABLE HORIZONTAL
JOINER Duplex 2205
JET494/SSS JET494/SCC
21mm x25mm x 75mm overall deep



+90 to - 45 deg ADJUSTABLE
VERTICAL JOINER Duplex 2205
JET495/SSS JET495/SCC
21mm x25mm x 73mm overall deep

This page applies to 12mm Toughened Glass only



Brackets for Fixing to Wall or End Post for 25mm SS Interlinking Rail







Note : All these Brackets use M5x6mm SS Grub Screws







WALL BRACKET Duplex 2205
JET496/SSS JET/496/SCC
68mm x 28mm x 30mm deep

WALL BRACKET - RH. Duplec 2205
JET497/RH/SSS JET497/RH/SCC
41mm x 47mm x 30mm deep

WALL BRACKET - LH Duplex 2205
JET497/LH/SSS JET497/RH/SCC
41mm x 47mm x 30mm deep

General Notes:
- All fixings to be Stainless Steel. - PVC Tape layer between Structure and Bracket
- ULS Point load N* = 0.9kN, inwards, outwards or down and in tension

Note : **Fixing to Steel**
- use 2 off 8g SS TEK Screws or M6 SS Bolts
- Steel 2mm min thickness
- Steel 300MPA minimum
- 15mm min distance to any Edges

Note : **Fixing to Timber Wall**
- use 2 off 8g SS Screws, 35mm min into studs.
- use Sika Supergrip 2hr
- 30mm min distance to Horizontal Edge
- If Weatherboard use suitable predrilled Wedge
- Timber stud wall to be designed and detailed in accordance with NZ3603 or NZ3604

Note : **Fixing to Juralco EDGE Post**
- use 2 off 8g x 25 SS PK Screws

Note : **Fixing to Concrete Wall**
- use 2 off M6 x70 SS Screw Anchors
- Solid Concrete min 20Mpa
- Block wall Concrete filled/Reinforced
- 140mm min Wall thickness
- 70mm min distance to Horizontal Edge
- 100mm min distance to Vertical Edge
- Blockwork wall must be corefilled /reinforced and is to be designed and detailed in accordance with NZ4230 or NZ4229

Important Note: All Interlinking rails, at their ends must be attached to a Building Structure or to an Edge Post attached to the Deck structure, using Rail End Plates/Brackets

40mm SS Interlinking Top Rail

This page applies to 12mm and 15mm Toughened Glass and 15.2mm and 17.2mm Laminated Glass only



SS Interlinking Top Rail
12mm Glass Gasket
JET/430GT/12/2.9



SS Interlinking Top Rail
15mm Glass Gasket
JET/430GT/15/2.9

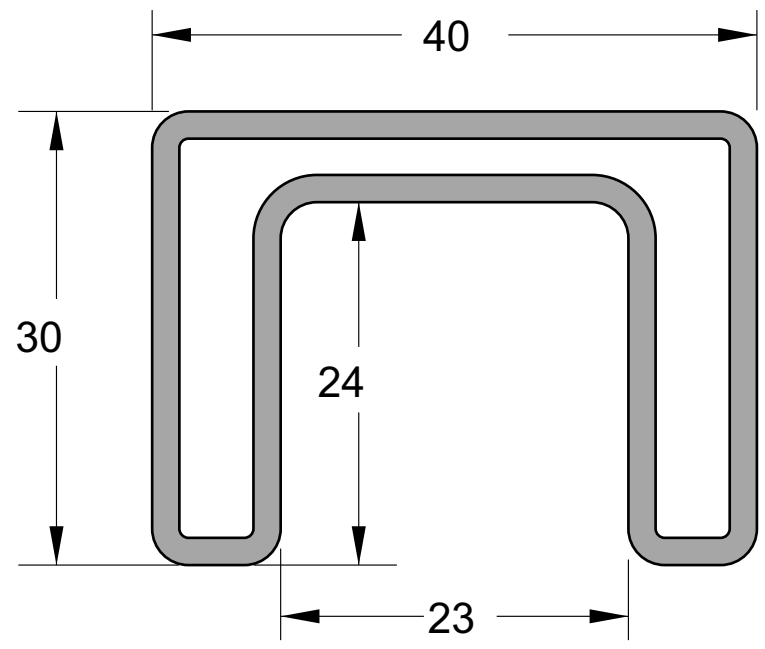

SS INTERLINKING TOP RAIL
JET/430/PSS/5.8

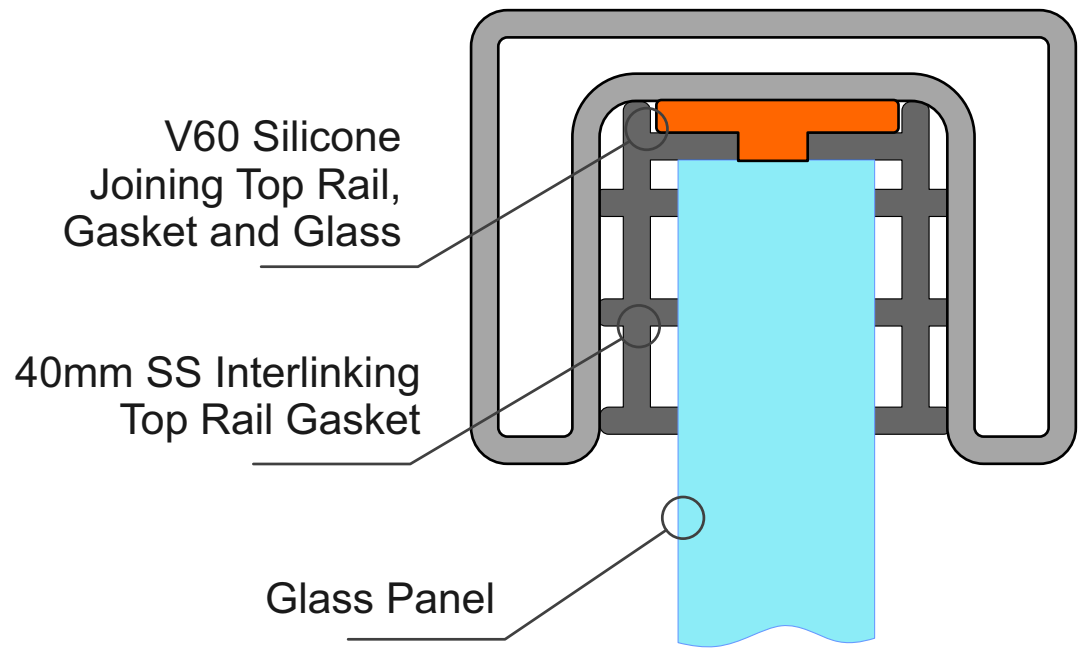

Use Gasket for 12mm and 15mm Toughened Glass

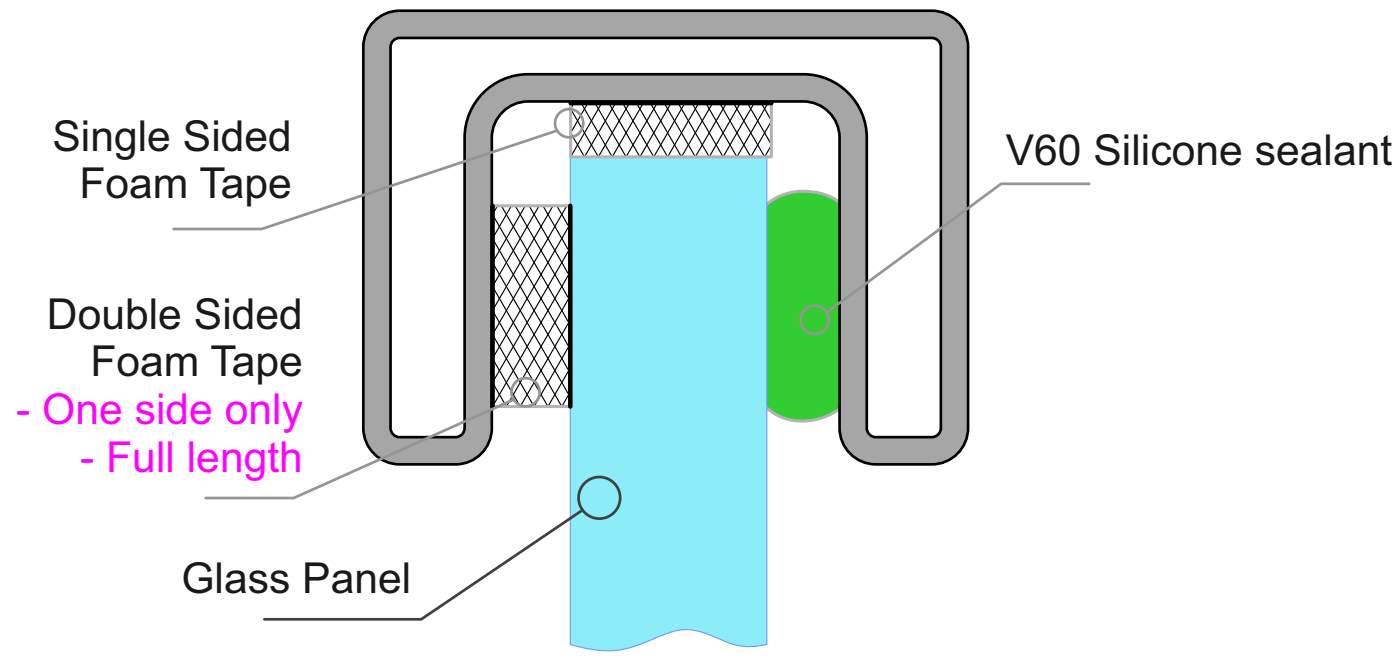

Use Foam Tape for 15.2mm and 17.2mm Laminated Glass

40mm SS Interlinking Rail Connectors

Note : All these Brackets use M5 x 6 SS Grub Screws.
If necessary these holes must be Drilled + tapped M5, as shown.
The under side of the Interlinking Rail must be drilled
M6/7 to match M5 tapped holes positions, for access to Grub screws
- Joins, where required must be at the end of Glass Panels

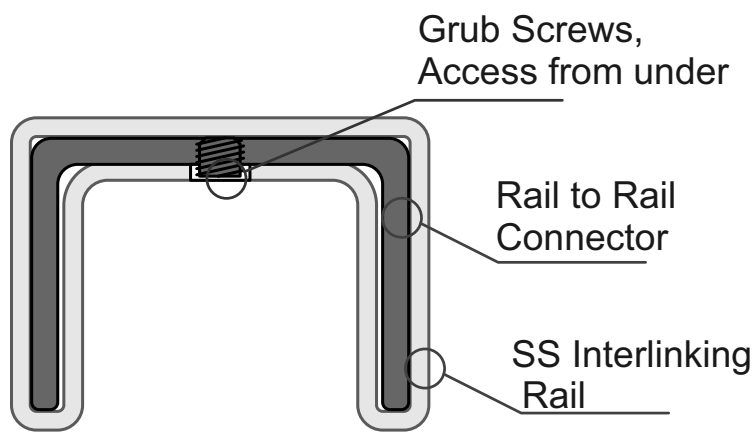



180deg INLINE JOINER 2205
JET/431/PSS
60mm x 40mm x 30mm deep



END CAP 2205
JET/432/PSS
33mm x 40mm x 30mm deep



90deg JOINER 2205
JET/433/PSS
95mm x 95mm x 30mm deep



+90 to - 45 deg ADJUSTABLE
HORIZONTAL JOINER 2205
JET/434/PSS
70mm x 70mm x 30mm deep



+90 to - 45 deg ADJUSTABLE
VERTICAL JOINER 2205
JET/435/PSS
60mm x 60mm x 40mm wide

Applies to 38mm Rectangular and 50mm Round InterlinkingTop Rails only

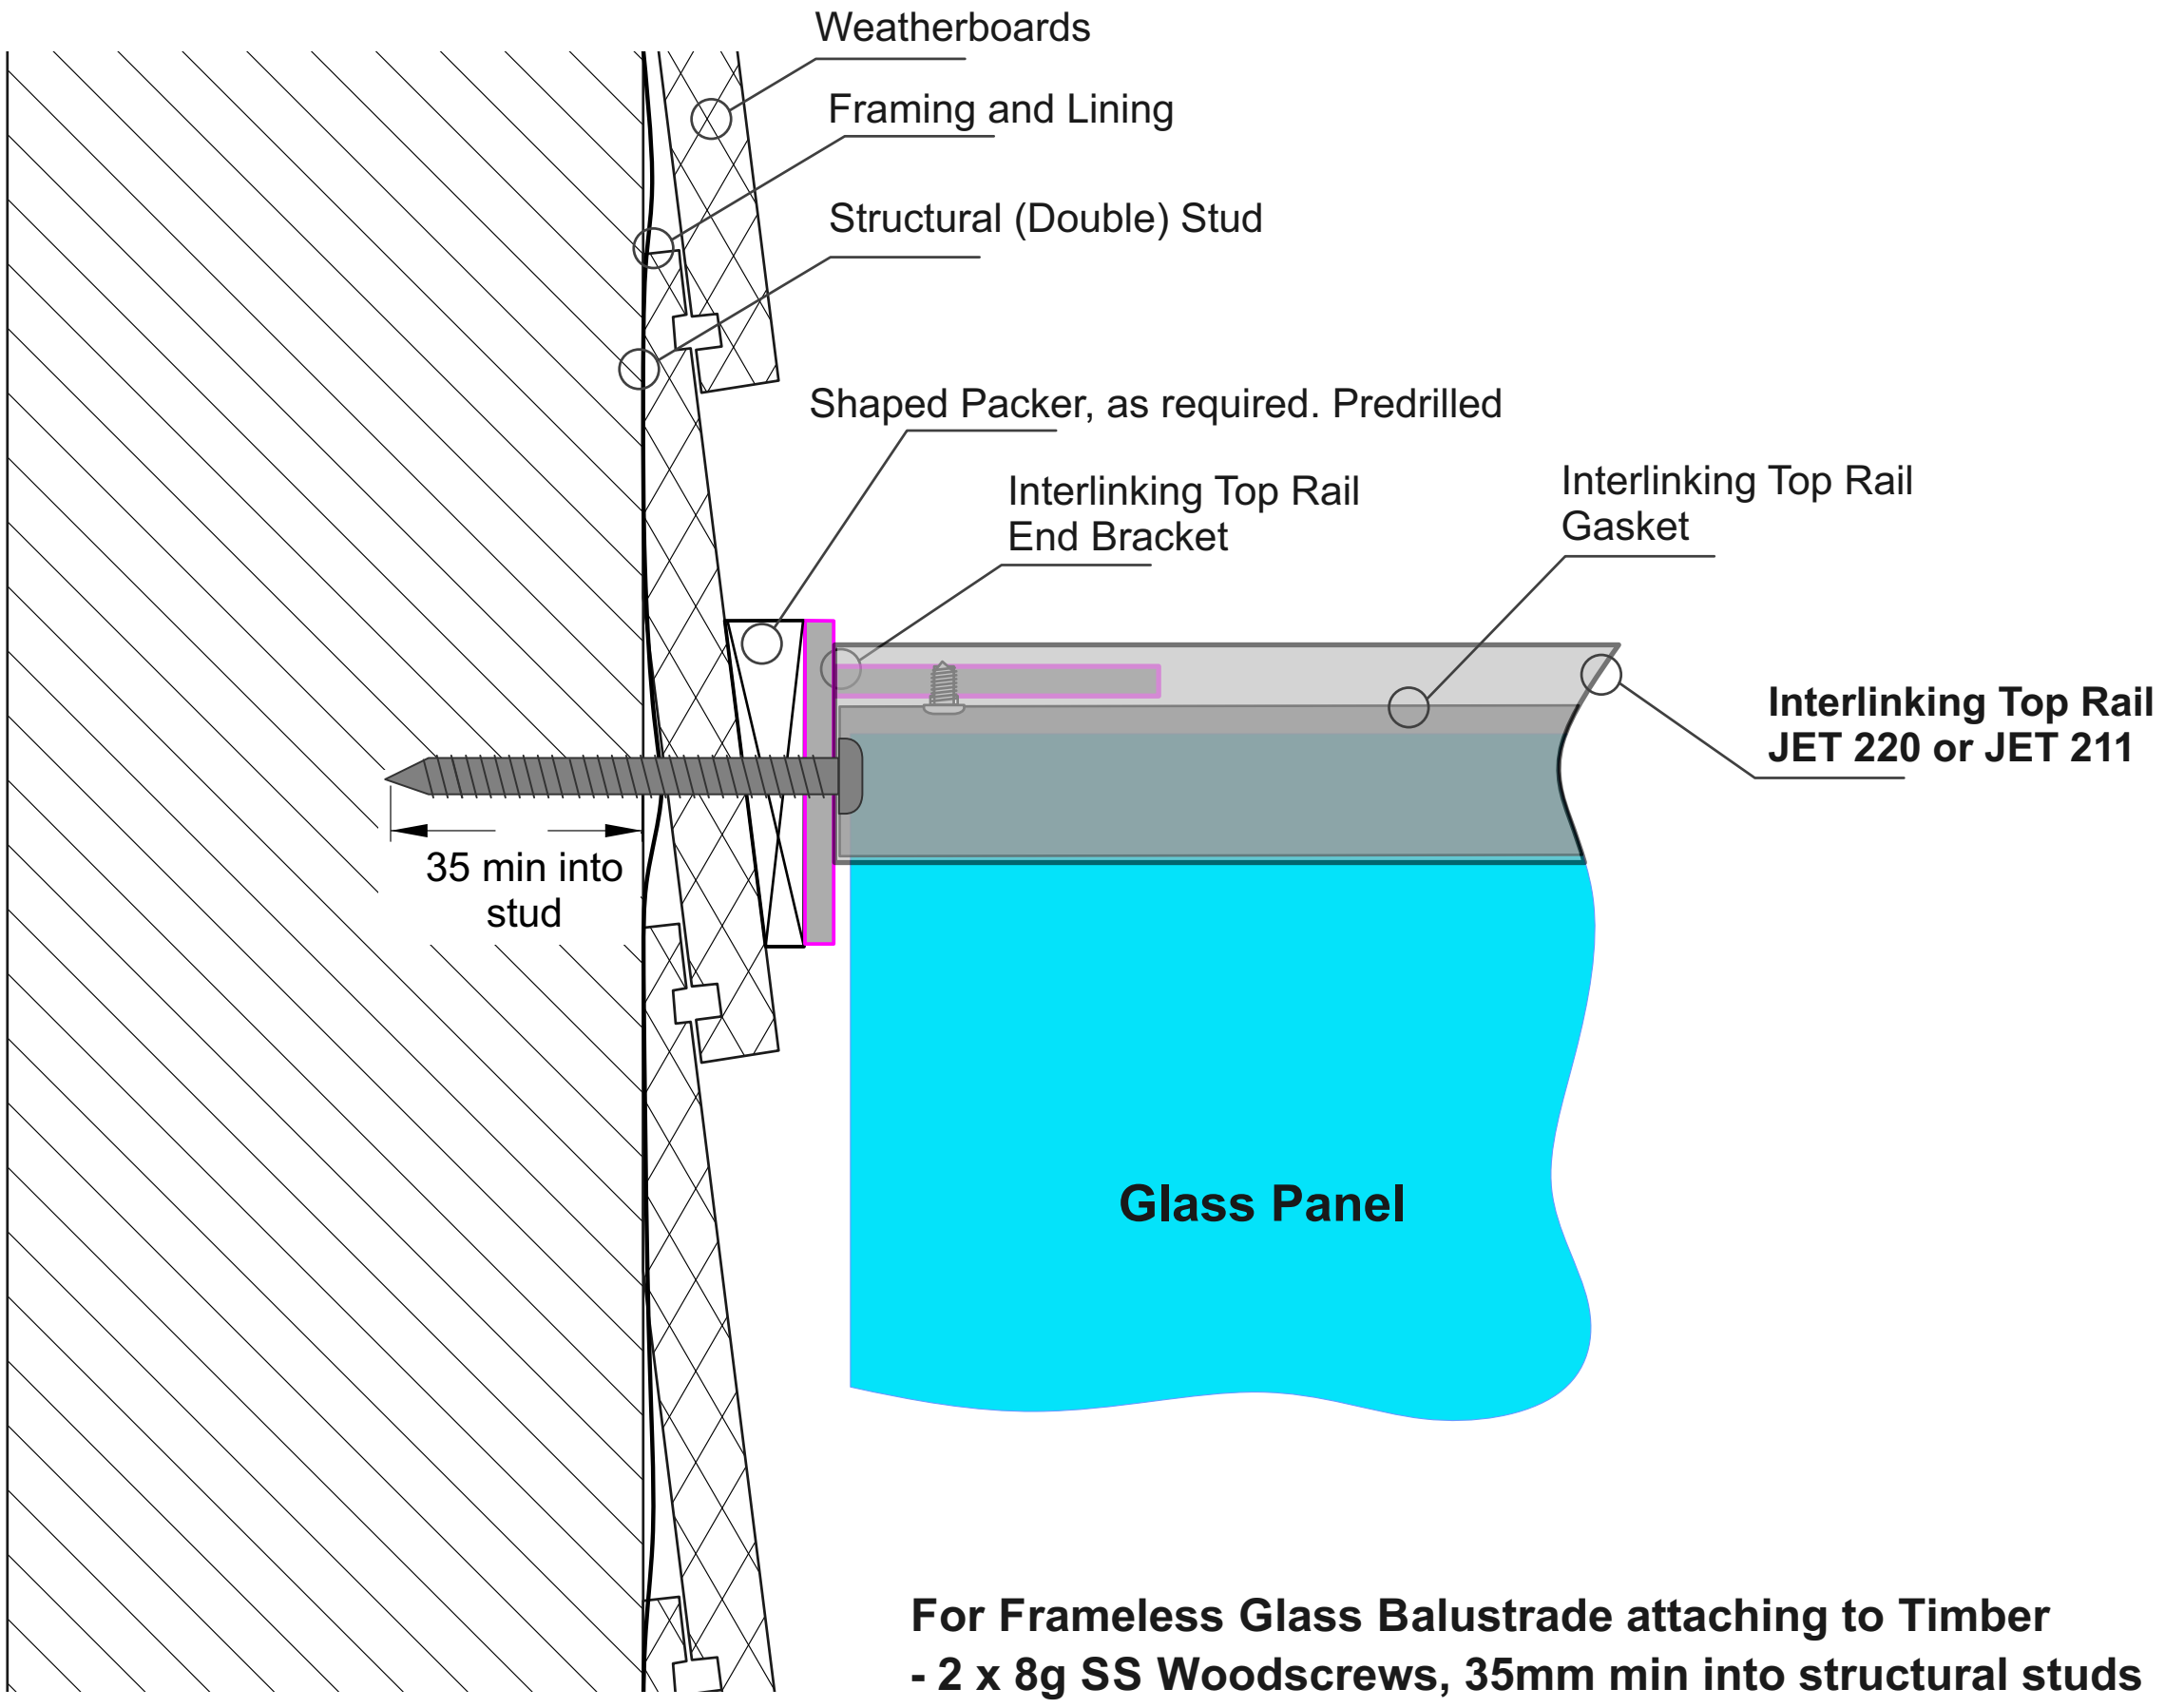

For Frameless Glass Balustrade attaching to Timber
- 2 x 8g SS Woodscrews, 35mm min into structural studs
- 20mm min to edge of stud in all directions

Interlinking Top Rail End Bracket Options - Drawing above shows JET40



Interlinking Top Rail
Wall type End Plate
SS. 120x45mm
Part No JET 40LH



Interlinking Top Rail
Wall type End Plate
SS. 120x45mm
Part No JET 40RH



Interlinking Top Rail
End Bracket
SS. 60mm x 46mm
Part No JET 42

Notes:
- All fixings to be stainless steel
- Timber stud wall to be designed by Project structural engineer for loads imposed by Balustrade.
- ULS Point load N* = 0.9kN, inwards, outwards or down.
- Minimum Stud size = 90mm x 45mm
- Minimum Timber grade = Sg8
- Timber stud wall to be designed and detailed in accordance with NZ3603 or NZ3604

Interlinking Top Rail attaching to Concrete Wall

Applies to 38mm Rectangular and 50mm Round InterlinkingTop Rails only

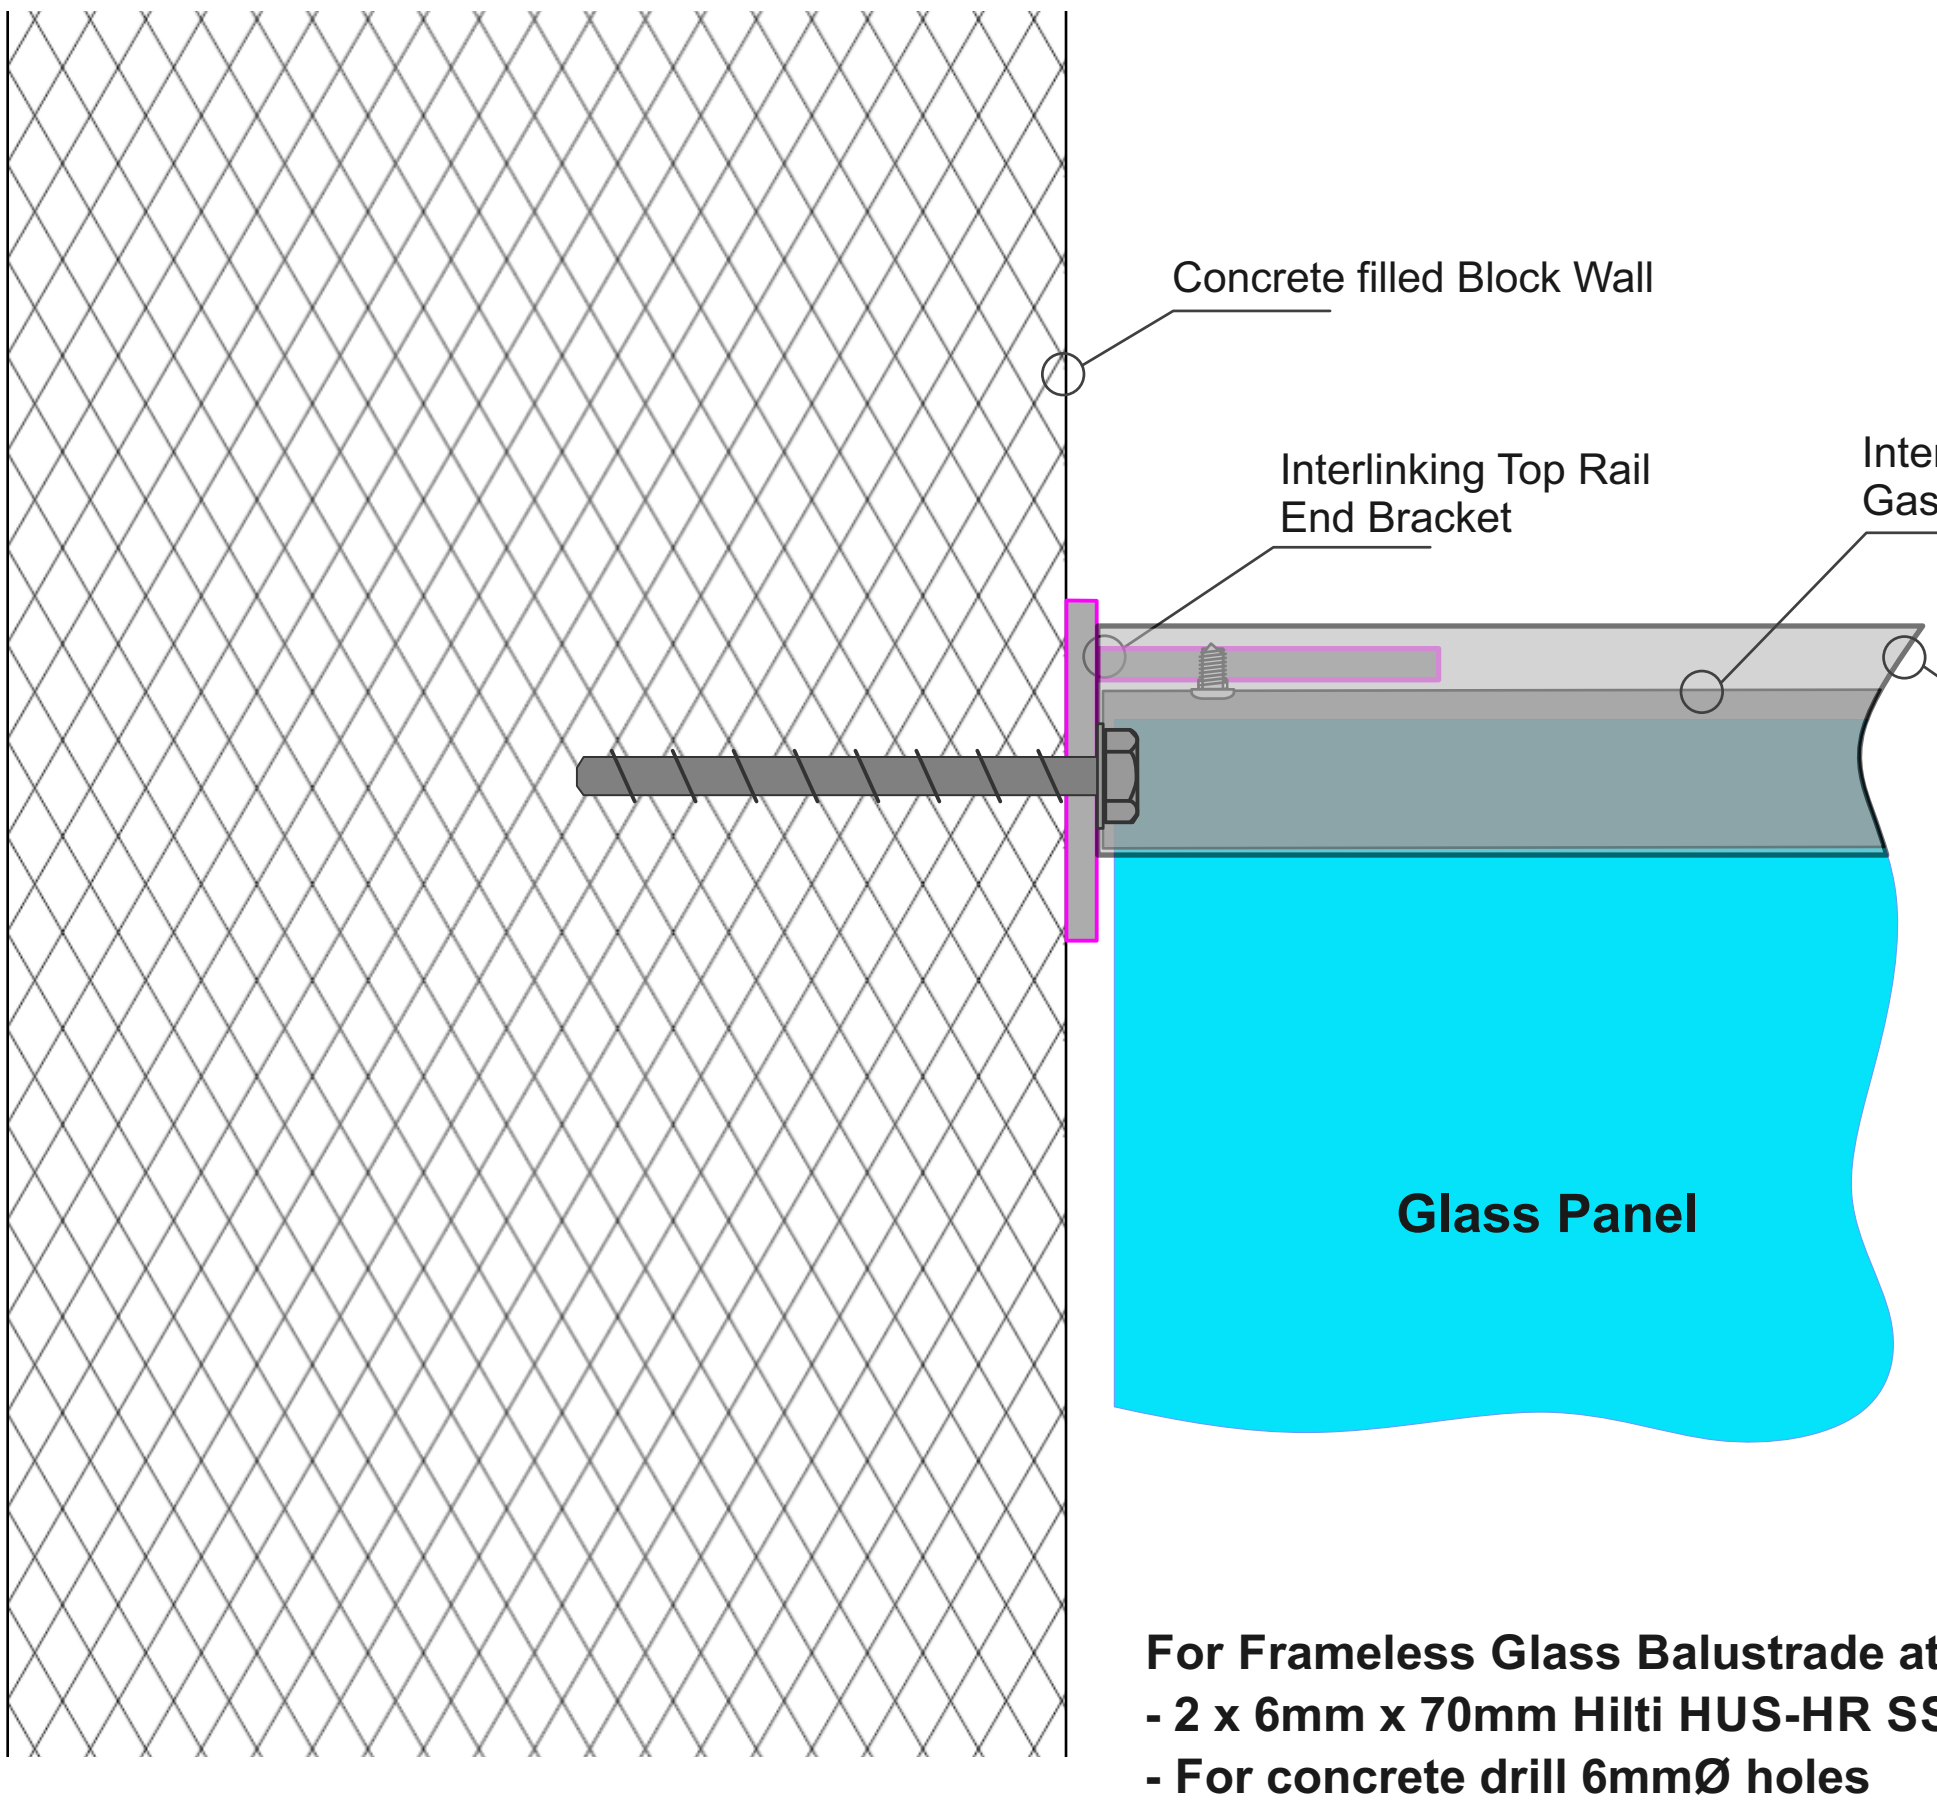

For Frameless Glass Balustrade attaching to Block Wall
- 2 x 6mm x 70mm Hilti HUS-HR SS Screw anchors
- For concrete drill 6mmØ holes
- 70mm min to side edge of concrete, 100mm to top edge.

Interlinking Top Rail End Bracket Options - Drawing above shows JET40



Interlinking Top Rail
Wall type End Plate
SS. 120x45mm
Part No JET 40LH



Interlinking Top Rail
Wall type End Plate
SS. 120x45mm
Part No JET 40RH



Interlinking Top Rail
End Bracket
SS. 60mm x 46mm
Part No JET 42

Drill out holes to 9mmØ

Notes:
- All fixings to be stainless steel
- Blockwall to be designed by Project structural engineer for loads imposed by Balustrade.
- ULS Point load N* = 0.9kN, inwards, outwards or down.
- Minimum blockwork thickness = 140mm
- Minimum core fill concrete strength = 17.5MPa
- Blockwork wall must be corefilled /reinforced and is to be designed and detailed in accordance with NZ4230 or NZ4229

125 SERIES POOL HINGE

GLASS TO GLASS

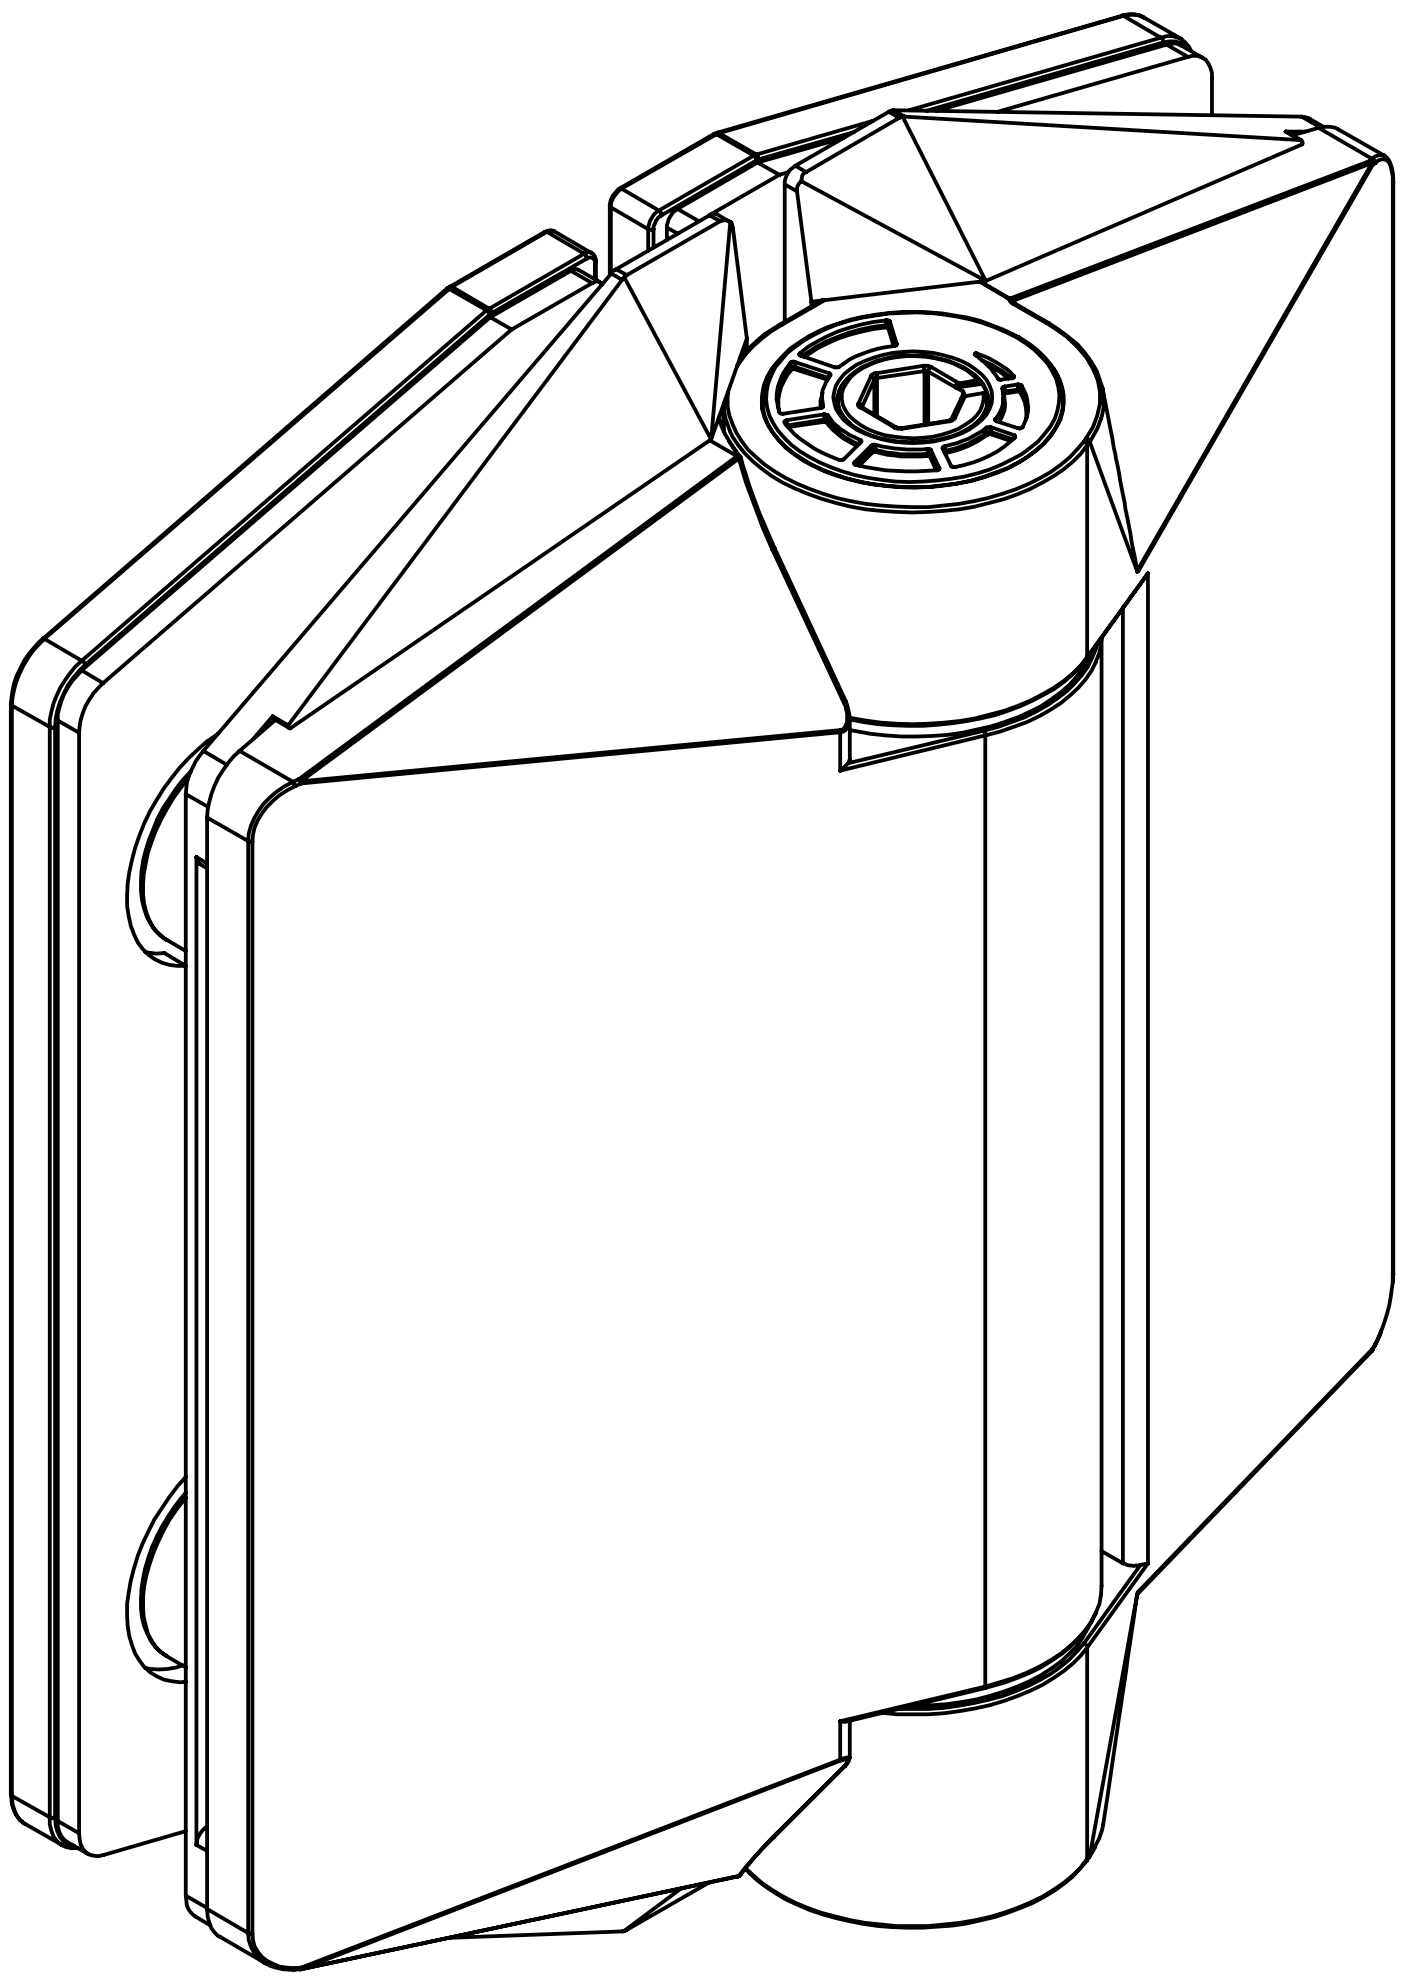

FINISHES AND FUNCTIONS

- 2205 GRADE STAINLESS STEEL
- 3 SURFACE FINISHES
- SIMPLE *QUIK-ADJUST* RATCHET SYSTEM
- SINGLE ACTION
- SOFT CLOSE
- NON-HOLD OPEN
- ANTI-FOOT-HOLD GASKET AND SAFETY CAP INCLUDED

10mm
12mm

MAX.
900mm WIDE x
1500mm HIGH

MAX
MAX 45kg

— 10˚C
+ 50˚C

90˚

125 SERIES POOL HINGE

- SELF-CLOSING SAFETY HINGE FOR GLASS POOL FENCING
- TO BE USED WITH CHILD PROOF SAFETY LATCH
- COMPLIES WITH AUSTRALIAN STANDARDS FOR POOL GATE HARDWARE
- NATA ACCREDITED AND INDEPENDENTLY TESTED TO 25 000 CYCLES (NATA = NATIONAL ASSOCIATION OF TESTING AUTHORITIES AUSTRALIA)

SIDE PULL LATCHES

POLYMER SIDE PULL LATCH

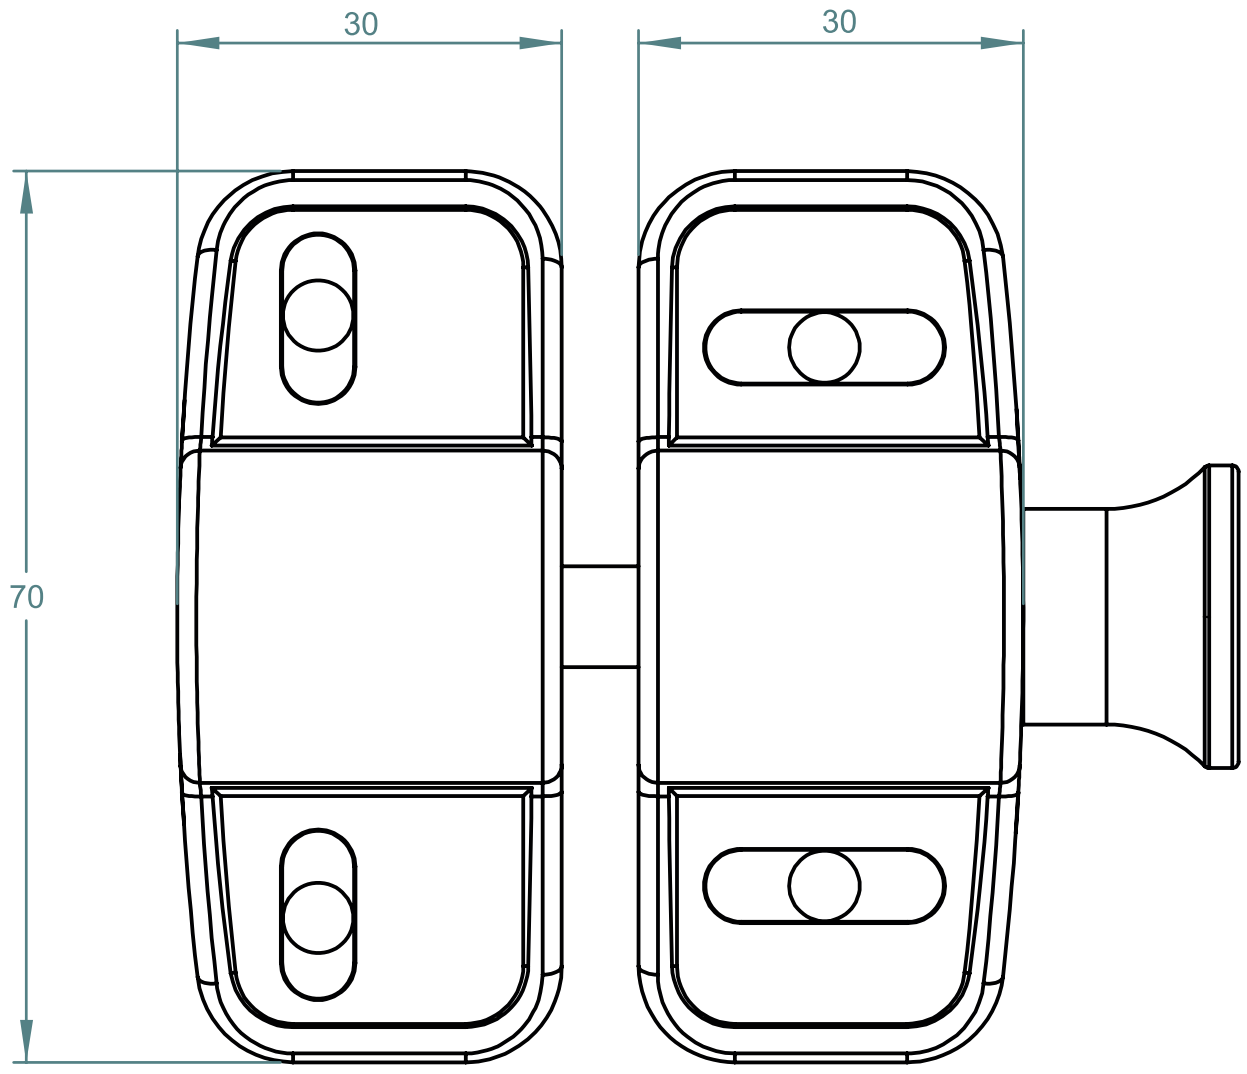

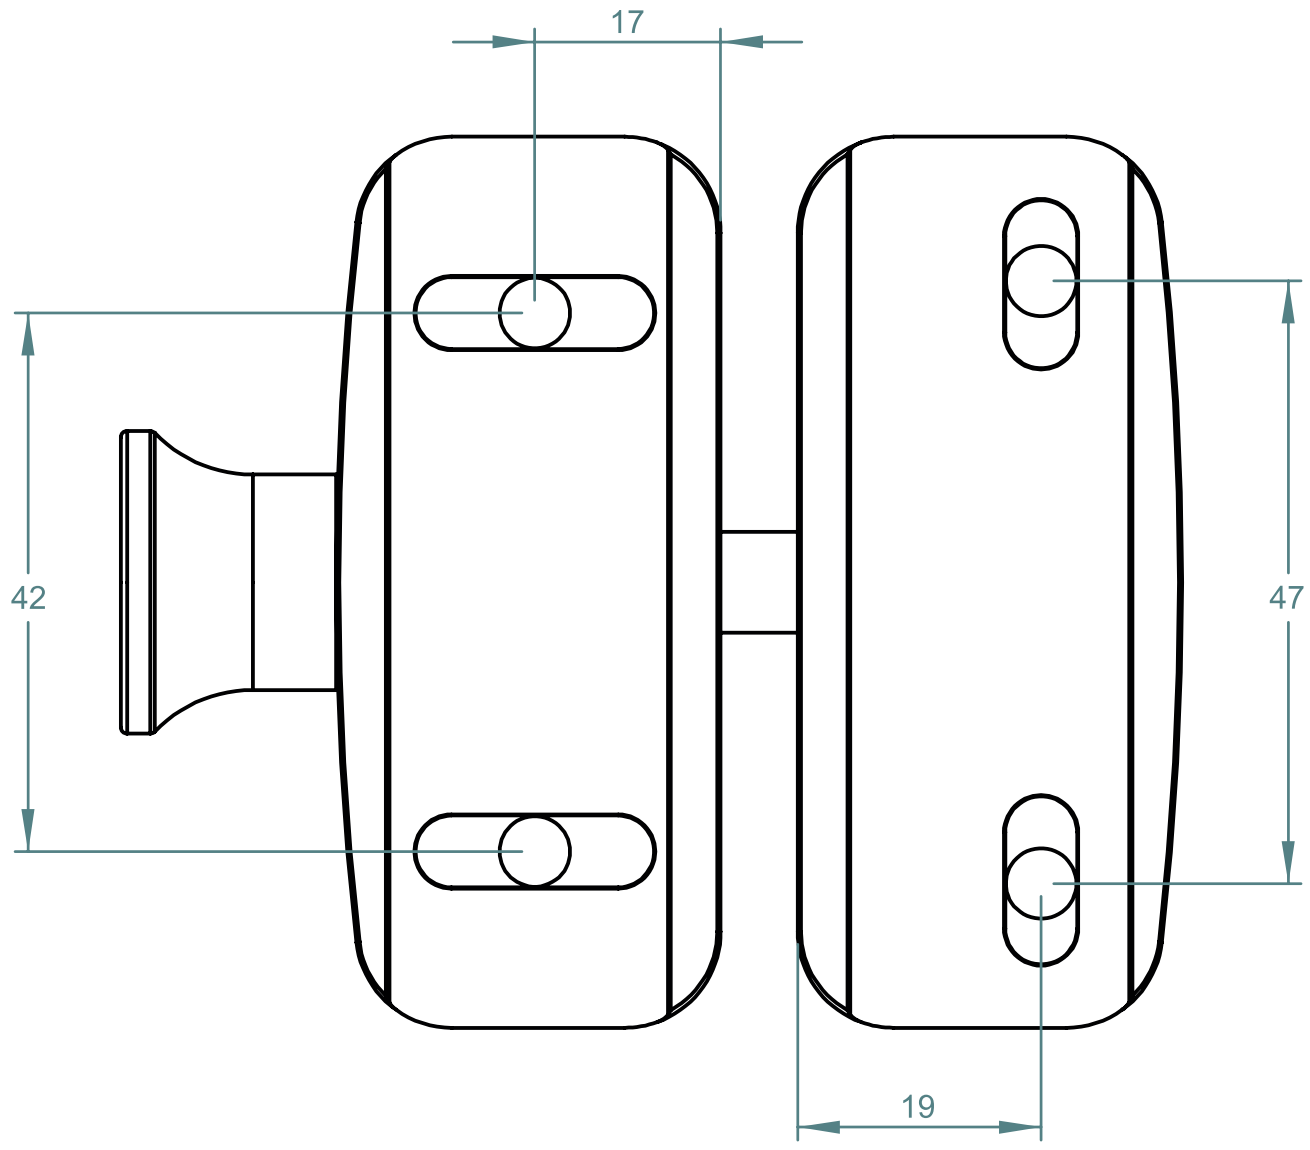

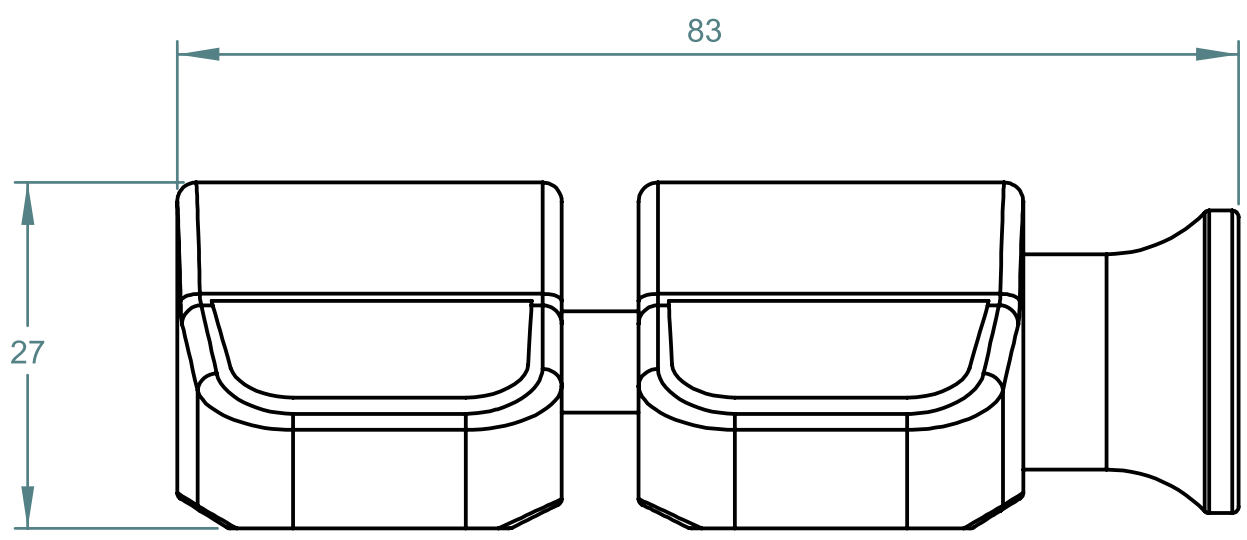

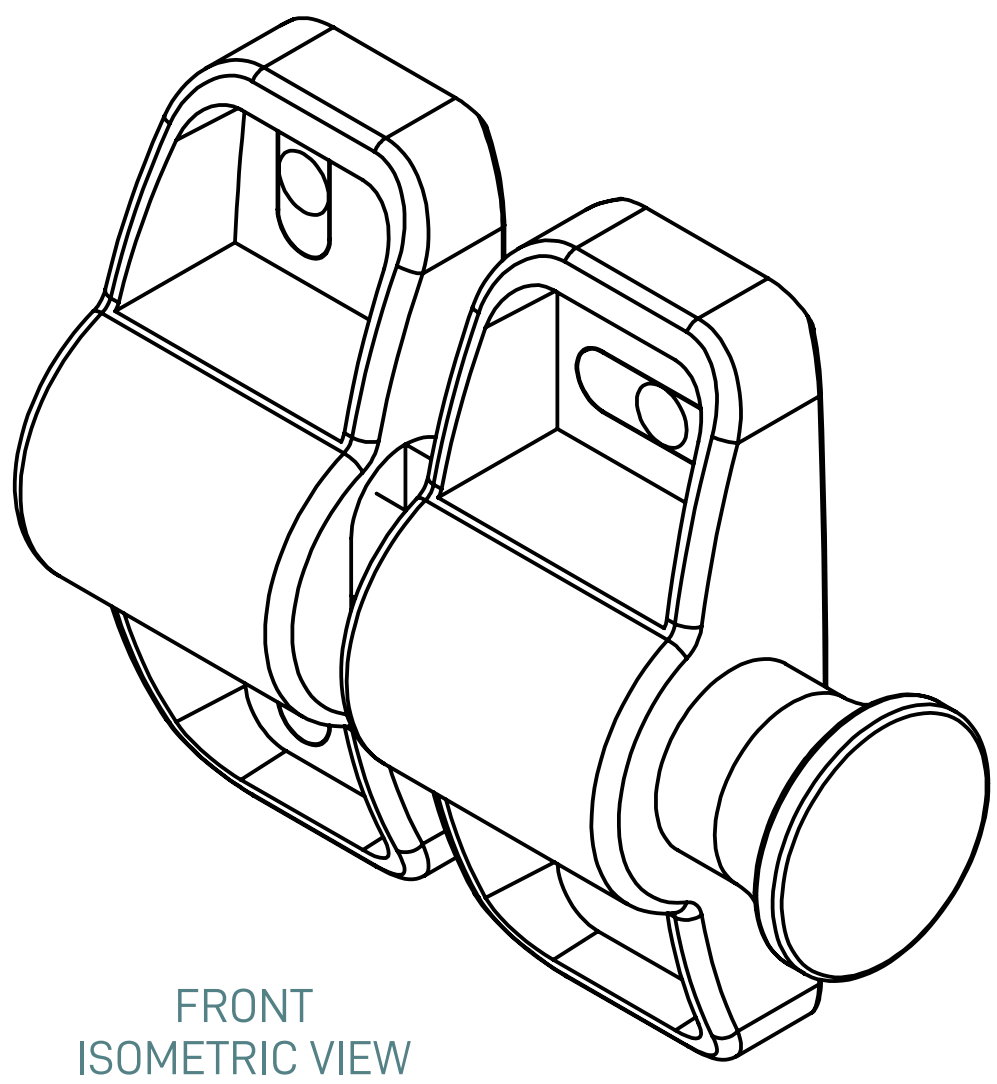

FRONT
ISOMETRIC VIEW