
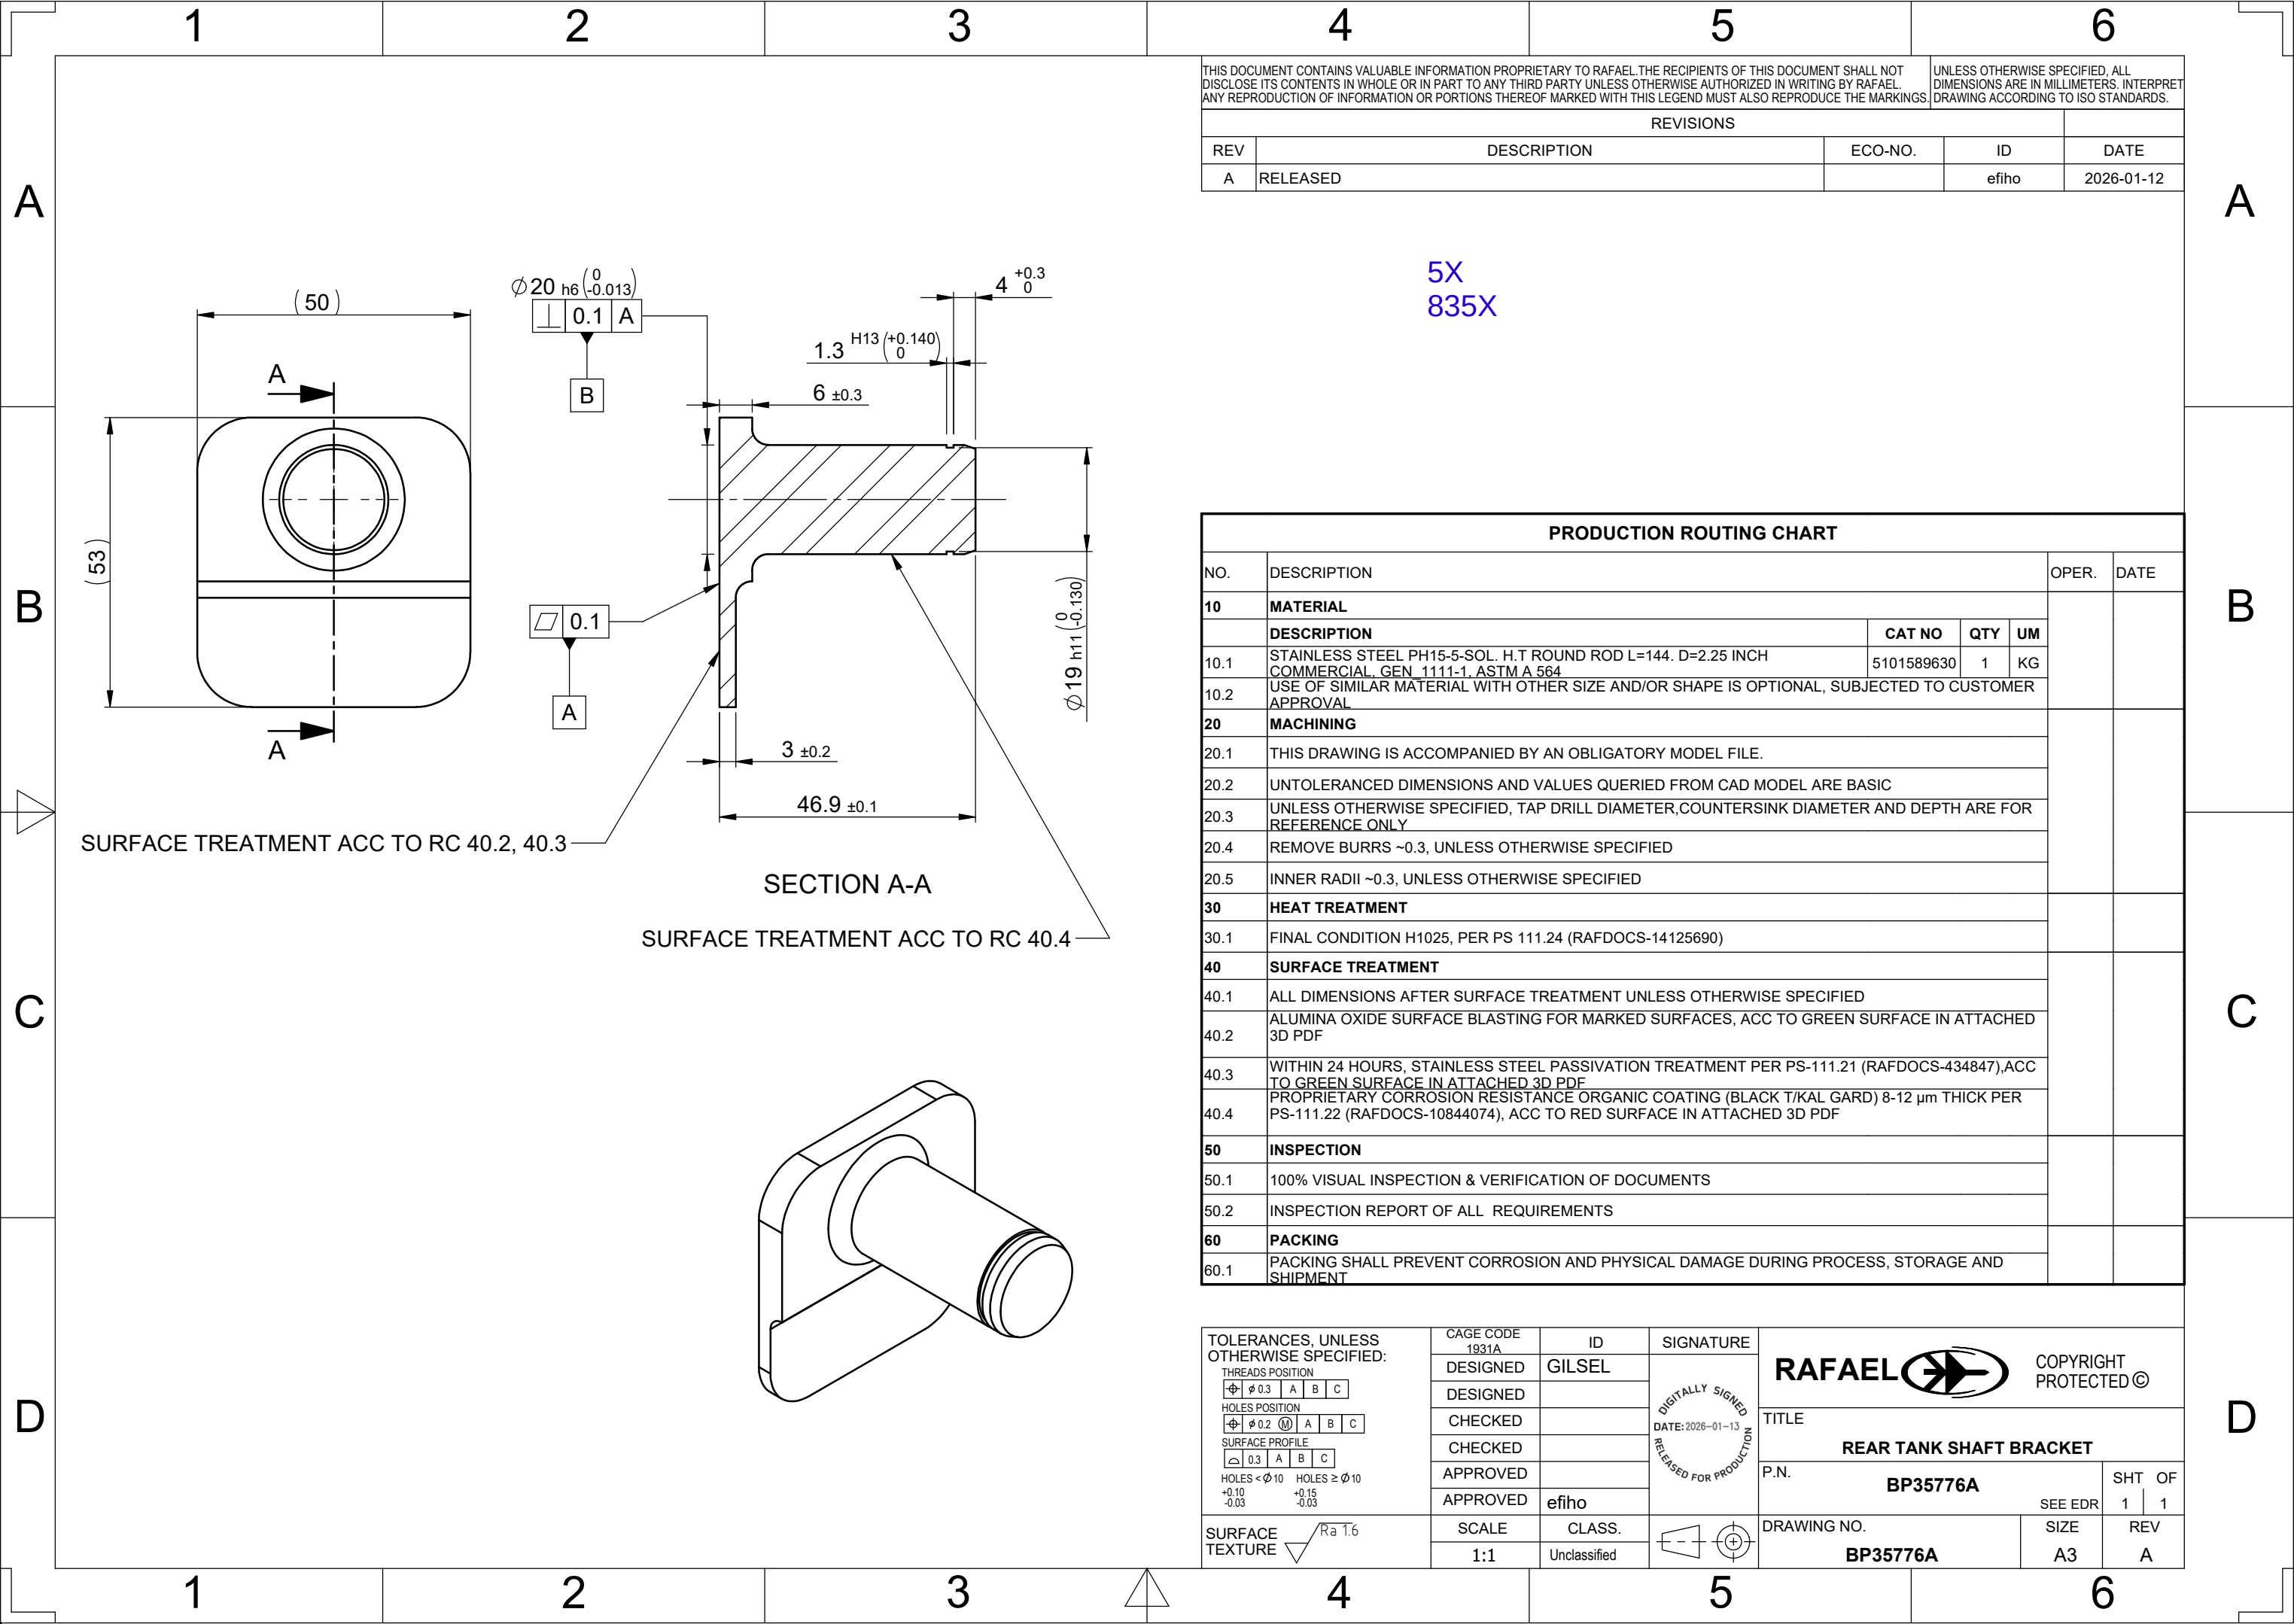




THIS DOCUMENT CONTAINS VALUABLE INFORMATION PROPRIETARY TO RAFAEL. THE RECIPIENTS OF THIS DOCUMENT SHALL NOT DISCLOSE ITS CONTENTS IN WHOLE OR IN PART TO ANY THIRD PARTY UNLESS OTHERWISE AUTHORIZED IN WRITING BY RAFAEL. ANY REPRODUCTION OF INFORMATION OR PORTIONS THEREOF MARKED WITH THIS LEGEND MUST ALSO REPRODUCE THE MARKINGS.			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS. INTERPRET DRAWING ACCORDING TO ISO STANDARDS.	
REVISIONS				
REV	DESCRIPTION	ECO-NO.	ID	DATE
A	RELEASED		efiho	2026-01-12

5X
835X

PRODUCTION ROUTING CHART					OPER.	DATE
NO.	DESCRIPTION					
10	MATERIAL					
	DESCRIPTION	CAT NO	QTY	UM		
10.1	STAINLESS STEEL PH15-5-SOL. H.T ROUND ROD L=144. D=2.25 INCH COMMERCIAL, GEN_1111-1, ASTM A 564	5101589630	1	KG		
10.2	USE OF SIMILAR MATERIAL WITH OTHER SIZE AND/OR SHAPE IS OPTIONAL, SUBJECTED TO CUSTOMER APPROVAL					
20	MACHINING					
20.1	THIS DRAWING IS ACCOMPANIED BY AN OBLIGATORY MODEL FILE.					
20.2	UNTOLERANCED DIMENSIONS AND VALUES QUERIED FROM CAD MODEL ARE BASIC					
20.3	UNLESS OTHERWISE SPECIFIED, TAP DRILL DIAMETER,COUNTERSINK DIAMETER AND DEPTH ARE FOR REFERENCE ONLY					
20.4	REMOVE BURRS ~0.3, UNLESS OTHERWISE SPECIFIED					
20.5	INNER RADII ~0.3, UNLESS OTHERWISE SPECIFIED					
30	HEAT TREATMENT					
30.1	FINAL CONDITION H1025, PER PS 111.24 (RAFDOCS-14125690)					
40	SURFACE TREATMENT					
40.1	ALL DIMENSIONS AFTER SURFACE TREATMENT UNLESS OTHERWISE SPECIFIED					
40.2	ALUMINA OXIDE SURFACE BLASTING FOR MARKED SURFACES, ACC TO GREEN SURFACE IN ATTACHED 3D PDF					
40.3	WITHIN 24 HOURS, STAINLESS STEEL PASSIVATION TREATMENT PER PS-111.21 (RAFDOCS-434847),ACC TO GREEN SURFACE IN ATTACHED 3D PDF					
40.4	PROPRIETARY CORROSION RESISTANCE ORGANIC COATING (BLACK T/KAL GARD) 8-12 µm THICK PER PS-111.22 (RAFDOCS-10844074), ACC TO RED SURFACE IN ATTACHED 3D PDF					
50	INSPECTION					
50.1	100% VISUAL INSPECTION & VERIFICATION OF DOCUMENTS					
50.2	INSPECTION REPORT OF ALL REQUIREMENTS					
60	PACKING					
60.1	PACKING SHALL PREVENT CORROSION AND PHYSICAL DAMAGE DURING PROCESS, STORAGE AND SHIPMENT					

TOLERANCES, UNLESS OTHERWISE SPECIFIED: THREADS POSITION ⌀ 0.3 A B C HOLES POSITION ⌀ 0.2 M A B C SURFACE PROFILE ⏏ 0.3 A B C HOLES < ⌀ 10 HOLES ≥ ⌀ 10 +0.10 +0.15 -0.03 -0.03	CAGE CODE 1931A	ID	SIGNATURE	RAFAEL COPYRIGHT PROTECTED ©		
	DESIGNED	GILSEL	DIGITALLY SIGNED DATE: 2026-01-13 RELEASED FOR PRODUCTION			
	DESIGNED			REAR TANK SHAFT BRACKET		
	CHECKED			P.N.		
	CHECKED			BP35776A		SHT OF
	APPROVED			SEE EDR		1 1
	APPROVED	efiho				
SURFACE TEXTURE Ra 1.6	SCALE	CLASS.		DRAWING NO.	SIZE	REV
	1:1	Unclassified		BP35776A	A3	A