



ח"ג:מזמין

עד:

ידועה:1577


מסגרת:2200

מינימום:400

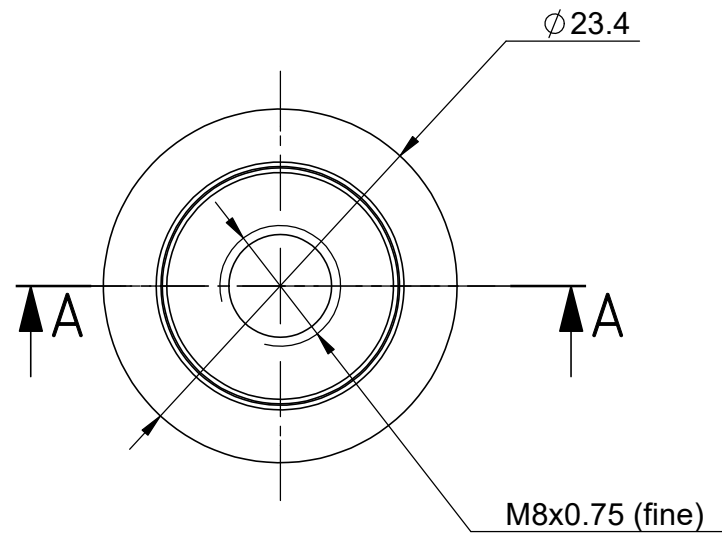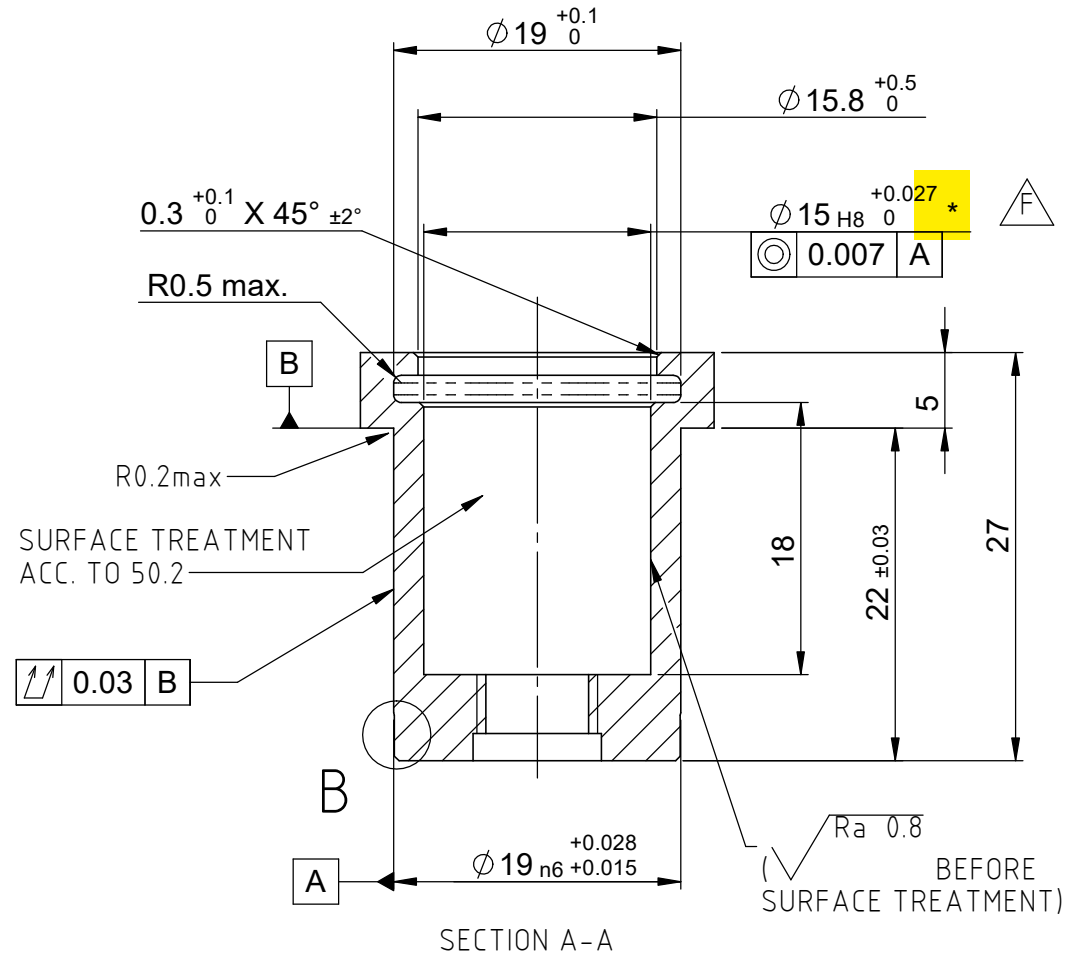

THIS DOCUMENT CONTAINS VALUABLE PROPRIETARY TO RAFAEL. THE RECIPIENTS OF THIS DOCUMENT SHALL NOT DISCLOSE ITS CONTENTS IN WHOLE OR IN PART TO ANY THIRD PARTY UNLESS OTHERWISE AGREED BY RAFAEL.		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS. INTERPRET DRAWING ACCORDING TO ISO STANDARDS.		
REVISIONS				
REV	DESCRIPTION	ECO-NO.	ID	DATE
F	DEFINITIONS OF THE SURFACE TREATMENT AND INSPECTION HAS BEEN CHANGED	ECN350860	gevam	10-12-2023

PRODUCTION ROUTING CHART				
NO.	DESCRIPTION	OPER.	DATE	
10	GENERAL INSTRUCTIONS			
10.1	THIS DRAWING SHALL BE USED WITH ITS MODEL FOR COMPLETE PRODUCT DEFINITION			
10.2	DIMENSIONAL LIMITS APPLY AFTER SURFACE TREATMENT UNLESS OTHERWISE SPECIFIED			
20	MATERIAL			
	DESCRIPTION	CAT NO	QTY	UM
20.1	LOW ALLOY STEEL 4340-NORM. & TEMP. ROUND ROD L=144. D=1.25 INCH PREMIUM, GEN 1111-1	507021265	0.19	KG
20.2	OPTIONAL MATERIAL: USE OF SIMILAR MATERIAL WITH OTHER SIZE AND/OR OTHER SHAPE, ACCORDING TO COMPARABLE INTERNATIONAL STANDARDS, IS PERMITTED.			
30	HEAT TREATMENT			
30.1	PREMACHINING TO OVERSIZE 2 +3mm, RADII 4 min			
30.2	HARDENING AND TEMPERING- TO TENSILE STRENGTH 1172-1310 MPa (REF. HARDNESS 38-41 HRC) PER PS 111.24 (RAFDOS-14125690)			
40	MACHINING			
40.1	REMOVE BURRS ~0.3, UNLESS OTHERWISE SPECIFIED			
40.2	INNER RADII ~0.3, UNLESS OTHERWISE SPECIFIED			
50	SURFACE TREATMENT			
50.1	CHEMICAL DESCALING IS FORBIDDEN			
50.2	MARKED AREA - SOLID FILM LUBRICANT PER MIL-PRF-46010,NATURAL COLOR			
50.3	OTHER AREAS - CORROSION RESISTANT DRY FILM LUBRICANT PER RAFAEL SPEC. 111.22 CLASS 2			
60	INSPECTION			
60.1	VISUAL INSPECTION FOR THE ENTIRE LOT			
60.2	ACTUAL RESULTS TO BE REPORTED, EXCEPT GAUGE MEASUREMENTS			
60.3	SAMPLING INSPECTION ACC. TO PURCHASING DOCUMENTS			
60.4	100% INSPECTION OF CRITICAL REQUIREMENTS INDICATED BY (x)			
70	FINAL APPROVAL			
70.1	VISUAL INSPECTION & VERIFICATION OF DOCUMENTS			
70.2	SERVICEABILITY TAG			
80	PACKING			
80.1	PACKING SHALL PREVENT CORROSION AND PHYSICAL DAMAGE DURING PROCESS, STORAGE AND SHIPMENT			

TOLERANCES, UNLESS OTHERWISE SPECIFIED: THREADS POSITION ⌀ ⌀ 0.3 A B -- HOLES POSITION ⌀ ⌀ 0.2 M A B -- SURFACE PROFILE ⌒ 0.4 A B -- HOLES < ⌀ 10 HOLES ≥ ⌀ 10 +0.10 +0.15 -0.03 -0.03	CAGE CODE 1931A	ID	SIGNATURE	RAFAEL COPYRIGHT PROTECTED ©		
	DESIGNED	EHUDMA	DIGITALLY SIGNED DATE: 2023-12-13 RELEASED FOR PRODUCTION			
	DESIGNED					
	CHECKED	maorgo				
	CHECKED					
	APPROVED					
	APPROVED	reis				
SURFACE TEXTURE  Ra 1.6	SCALE	CLASS.		TITLE		
	2:1	Unclassified		BEARING		
				P.N.	J65039A	SHT OF
					SEE EDR	1 1
				DRAWING NO.	SIZE	REV
				J65039A	A3	F