


Communication component sizes (Simplified Dilithium-III (target): $n=6, \ell=5, \kappa=49$) — response z is 99.1% of the signature

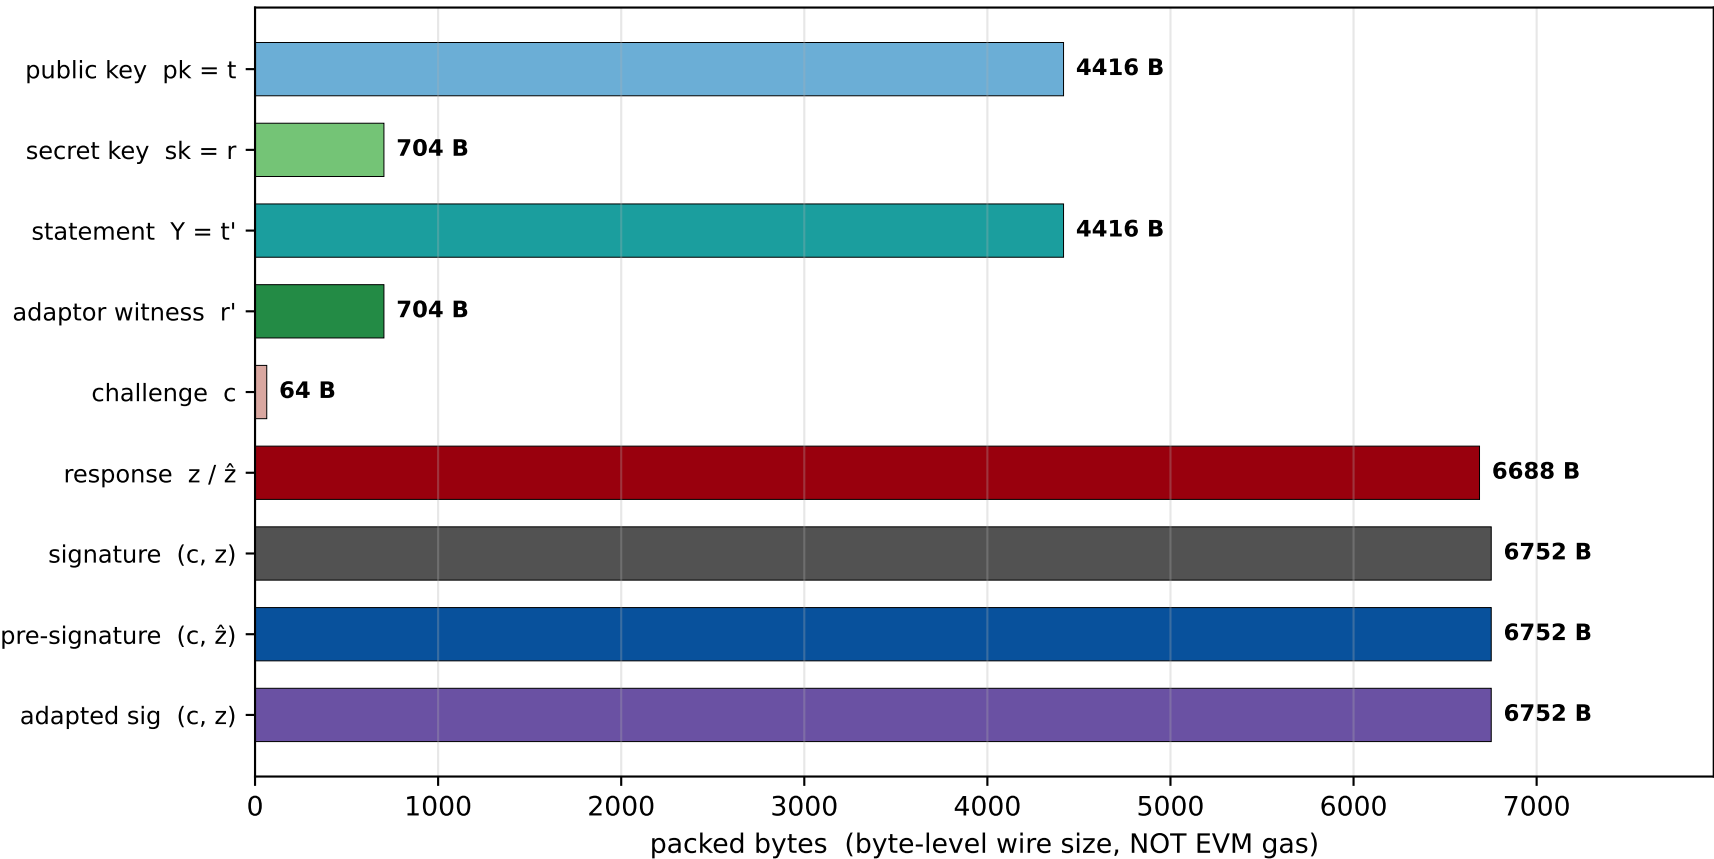

signature = (c, z), pre-signature = (c, $\hat{z}$), adapted = (c, $\hat{z} + r'$): all 6752 B — same encoded size because the adaptor witness r' changes the response value, it does not add a new serialized field.

single thread, -O3, 10 runs x 1000 iters/op; error bars = sample SD