


# Per-operation timing ( $\mu$ s): base signature vs LAS adaptor

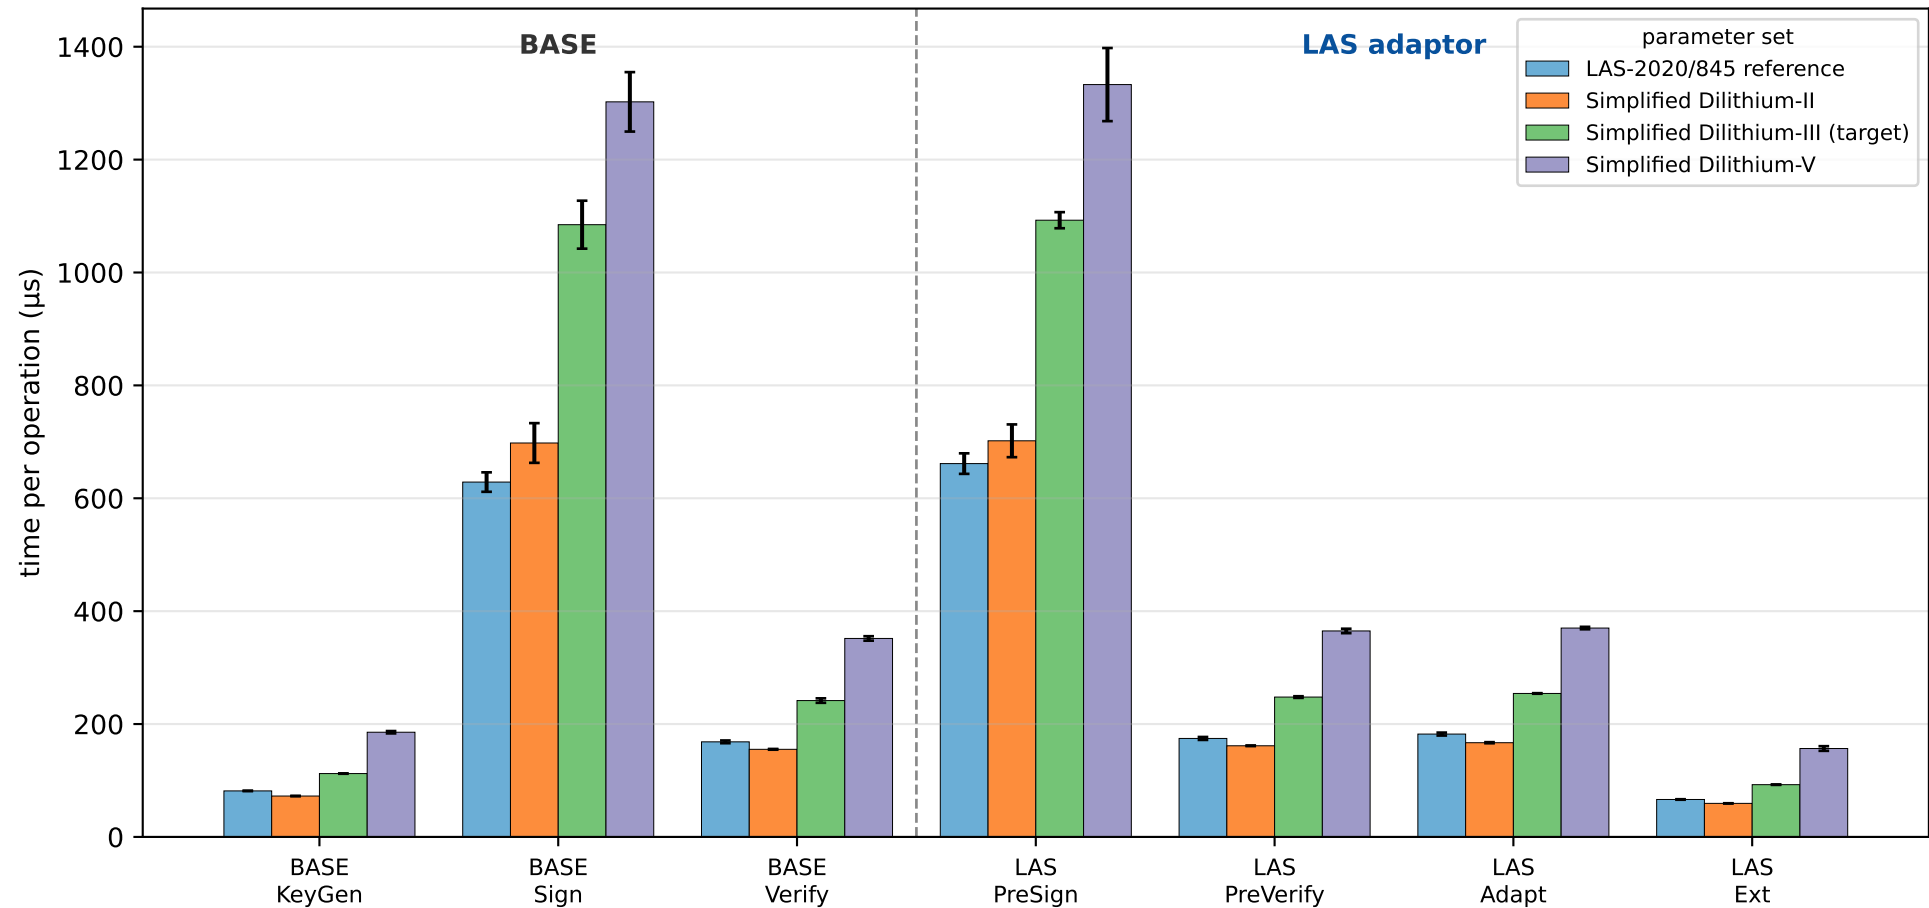

Machine: AMD Ryzen 7 7745HX with Radeon Graphics / WSL2 / gcc 13.3.0 | single thread, -O3, 10 runs x 1000 iters/op; error bars = sample SD

Settings are LAS parameter sets, NOT formal NIST levels: the LAS-2020/845 reference set uses Dilithium's modulus; the Simplified Dilithium-II/III/V sets reuse the Dilithium mode-2/3/5 dimensions. Base = simplified Dilithium-style basic signature (no statement Y); LAS = adaptor path (statement Y folded into the hash).