


[外形尺寸] Outline Demension

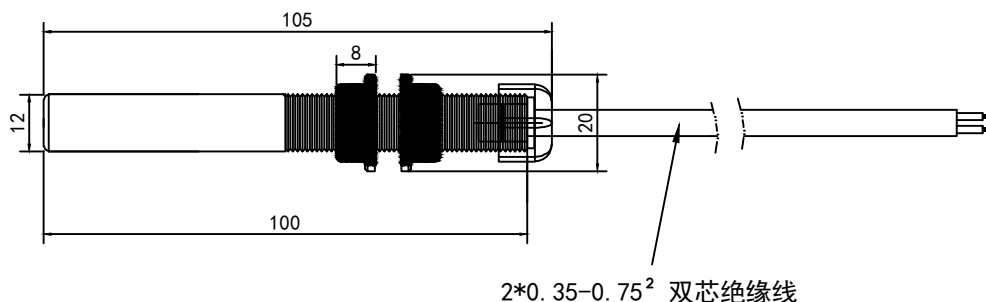

开关参数 Switch Characteristic

1. 干簧管型号 Switching Specifaction	1: (Normally open)	2: (Normally open High voltage)	3: (Normally open)	4: (Normally open)	5: (Normally open)
	Form A	Form A (HV)	Form A	Form A	Form A
2. 最大接点容量 Max Contact Rating	10W	10W	50W/70VA	100VA	80W
3. 最大开关电压 Max Switch Voltage	DC200V	AC265V/DC200V	AC300V/DC350V	DC1000V	DC250V
4. 最小击穿电压 Min Breakdown Voltage	DC250V	DC400V	DC600V	DC4000V	DC800V
5. 最大开关电流 Max Switch Current	0.5A	AC0.3A/DC0.4A	AC0.5A/DC0.7A	1.0A	1.3A
6. 最大负载电流 Max Carry Current	1.0A	1.4A	2.5A	2.5A	2.0A

使用特性 Operating Characteristics

操作时间 Operate Time		max.	0.6 ms
释放时间 Release Time		max.	0.05 ms
冲击性 Shock	11ms 1/2 sine wave	max.	100 G
振动 Vibration	50-2000 Hertz	max.	30 G
共振频率 Resonant Frequency		typ.	2500 Hz

订购信息 Order Information

系列 Series	触点形式 Contact Form	开关参数 Switch Characteristic	磁性特征 (灵敏度) Magnetical Specifaction (Sensitivity)	电线长度 (毫米) Cable Length (mm)	剥皮浸锡 Termination
MS25-	XX	X	X	X	W
选项 OPTIONS	1A: 1Form A 1B: 1Form B	1: 10W 2: 10W (HV) 3: 50W 4: 100VA 5: 80W	1: 10AT-15AT 2: 15AT-20AT 3: 20AT-25AT 4: 25AT-30AT 5: 80AT-90AT	1: 100mm 2: 300mm 3: 500mm	W: 5mm of wire stripped and tinned

备注 Remark:

RoHS


设计 Designed by	Zhang Xiao Jing
审查 Checked by	Xu Deng Kui
批准 Approved by	Xu Tao
日期 Date	2013.05.29

品名 TITLE

接近开关 Proximity Switch

产品型号 P/N

MS25



版本 Version: V1.0

页次 Page: 1/1