

Phase-1 Apollo HFE Validation
Supporting Information — A Beginner's Walk-through
for the Lunar-V2 / TSUKIMI Thermal-Modelling Pipeline

R. P. Gregorio

April 26, 2026

Contents

How to read this document	3
1 The Moon as a Thermal System	4
1.1 Why the Moon's surface temperature varies so much	4
1.2 The thermal skin depth	4
1.3 What the Apollo Heat-Flow Experiment actually measured	5
2 The 1-D Heat Equation in Regolith	6
2.1 Derivation from energy conservation	6
2.2 Boundary conditions	6
2.3 Solar geometry and the surface forcing	7
3 The Hayne (2017) Regolith Parameterisation	8
3.1 Thermal conductivity $K(T, z)$	8
3.2 Bulk density $\rho(z)$	8
3.3 Specific heat $c_p(T)$	8
3.4 Site-specific (measured) inputs	9
3.5 The discrete 3-layer alternative	9
4 The Numerical Solver	10
4.1 Discretisation strategy	10
4.2 Crank-Nicolson scheme	10
4.3 Spin-up	10
5 Apollo HFE Validation in Detail	12
5.1 Per-sensor diurnal grid	12
5.2 One-to-one obs vs model scatter	12
5.3 Residual vs depth	12
5.4 Diurnal amplitude vs depth (the borestem signature)	12
6 Independent Cross-Checks	17
6.1 Surface temperature against Diviner	17
6.2 Topographic shadow algorithm	17
6.2.1 Flat-plain horizon <i>unit test</i> (S8)	17
6.2.2 Crater horizon regression (S9)	17
6.2.3 Insolation chain demo (S10)	18
6.2.4 Shadow-coupled solver closure (S11)	18
7 Reproducibility & Code Walk-through	21
7.1 Repository layout (Phase 1)	21
7.2 Minimal solver invocation	21
7.3 How to swap the regolith model	22

How to read this document

This Supporting Information (SI) is written as a self-contained tutorial. Each chapter starts from first principles and assumes only an undergraduate background in differential equations, basic statistics, and rudimentary Python. If you are an experienced lunar thermophysics modeller, you may skim Chapters 1–4 and jump to Chapter 5. If you are a planetary-science student opening these methods for the first time, read in order.

Visual conventions (used throughout):

Aside

Coloured *aside* boxes contain pedagogical context, intuition, or historical notes that the main text does not strictly require but which help build understanding.

Key result

Green *key result* boxes contain a takeaway you should remember after reading the surrounding section.

Pitfall

Red *pitfall* boxes flag a place where it is easy to make a subtle mistake; we describe the mistake and the way to avoid it.

Chapter 1

The Moon as a Thermal System

1.1 Why the Moon’s surface temperature varies so much

The Moon has no atmosphere and no oceans. The only things buffering its surface temperature against the day–night solar cycle are the *thermal inertia* of the regolith (the loose, broken-up rock covering the surface) and, to a lesser extent, radiative re-emission to space. Thermal inertia is conventionally defined as

$$I = \sqrt{K\rho c_p}, \quad [\text{J m}^{-2} \text{K}^{-1} \text{s}^{-1/2}], \quad (1.1)$$

where K is thermal conductivity, ρ is bulk density and c_p is specific heat. For the Moon’s regolith, I is in the range 30–70 $\text{J m}^{-2} \text{K}^{-1} \text{s}^{-1/2}$ (Vasavada et al., 2012), hundreds of times *lower* than that of bare rock and roughly a thousand times lower than ocean water. The practical consequence is that the lunar surface heats and cools by several hundred kelvin in a single lunation (~ 29.53 d; Paige et al., 2010).

Why is regolith such a good insulator?

The regolith grains are roughly 50–100 μm in diameter and the contacts between them are essentially point contacts. Heat conducts across point contacts very poorly — much more poorly than across the bulk silicate it would be in solid form — so the effective K is two to three orders of magnitude below the mineral value. The radiative term $\chi(T/350)^3$ in (3.1) reflects the fact that, at high temperature, photons can hop from grain to grain across the empty pore space, providing a parallel heat-transfer channel that becomes important above ~ 200 K.

1.2 The thermal skin depth

The depth δ over which a periodic surface temperature wave of angular frequency ω attenuates by a factor e^{-1} is the *skin depth* of that wave:

$$\delta = \sqrt{\frac{2\kappa}{\omega}}, \quad \kappa \equiv \frac{K}{\rho c_p}, \quad (1.2)$$

where κ is the thermal diffusivity. For the Moon’s diurnal cycle ($\omega = 2\pi/29.53 \text{ d} \approx 2.5 \times 10^{-6} \text{ 1/s}$) and a representative $\kappa \approx 10^{-8} \text{ m}^2/\text{s}$ near the surface, this gives $\delta \approx 0.06 \text{ m}$ — exactly the H-parameter (Hayne (2017)) used throughout this work.

Why we need to model 5 m of regolith

The annual skin depth scales as $\delta \propto 1/\sqrt{\omega}$, so the annual wave penetrates $\sqrt{29.53 \times 12} \approx 19$ times deeper than the diurnal wave: roughly 1.1 m. To capture the deep Apollo HFE sensors

at 2.3 m *and* the asymptotic geothermal gradient (which requires a quiet zone several skin depths below the deepest measurement) we extend the modelled column to 5 m.

1.3 What the Apollo Heat-Flow Experiment actually measured

Each Apollo 15 and Apollo 17 borehole was drilled to roughly 2.4 m (A15) and 2.5 m (A17) using a hollow fibreglass tube ("borestem") that was left in place after drilling to keep the hole open. Inside this tube, a probe carrying eight platinum-resistance thermometers was lowered to instrumented depths. Two thermometer types were deployed:

- **Gradient (TG) bridges** measured the absolute temperature difference between two sensors separated by ~ 50 cm along the tube — designed to return the equilibrium thermal gradient and hence (after applying a K value) the basal heat flux.
- **Ring (TR) bridges** measured the absolute temperature of a single sensor relative to a reference resistor in the Apollo Lunar Surface Experiments Package (ALSEP) housing on the surface — designed primarily to track diurnal and annual variability.

The complete dataset, restored from the original tapes by [Nagihara et al. \(2018\)](#), covers ~ 1971 – 1977 for both sites and provides the only *in-situ* subsurface temperature measurements ever made on the Moon.

The borestem heat-short

The fibreglass borestem itself has a non-zero thermal conductivity and reaches all the way to the lunar surface, where it sees the full diurnal swing. Heat conducted *down the tube* from the surface contaminates the upper sensors, raising their effective day-time temperature and inflating their diurnal amplitude well above what the regolith alone would predict. [Nagihara et al. \(2018\)](#) attribute the contamination to the upper ~ 80 cm of the column. We inherit that depth as our shallow-sensor exclusion threshold and verify it independently in §5.4.

Chapter 2

The 1-D Heat Equation in Regolith

2.1 Derivation from energy conservation

Consider a thin slab of regolith of unit cross-section between depths z and $z + \Delta Tz$. Conservation of internal energy in the slab over time ΔTt requires

$$\underbrace{\rho(z) c_p(T) [T(z, t + \Delta Tt) - T(z, t)] \Delta Tz}_{\text{change in stored energy}} = \underbrace{q(z, t) \Delta Tt - q(z + \Delta Tz, t) \Delta Tt}_{\text{net heat flux in}},$$

where $q(z, t) = -K(T, z) \partial_z T$ is the conductive heat flux (Fourier's law). Taking $\Delta Tt, \Delta Tz \rightarrow 0$ and rearranging gives the 1-D heat equation:

$$\boxed{\rho(z) c_p(T) \frac{\partial T}{\partial t} = \frac{\partial}{\partial z} \left[K(T, z) \frac{\partial T}{\partial z} \right]} \quad (2.1)$$

Because both K and c_p depend on T this PDE is mildly non-linear; we handle the non-linearity with a Picard-style outer iteration around an otherwise linear Crank-Nicolson step (see Chapter 4).

Why no horizontal terms?

At the spatial scale of a single Apollo borehole and over the ~ 4 year recording window, lateral (horizontal) heat conduction in the upper few metres of regolith is negligible: the horizontal diffusion length over $\Delta t = 4$ years with $\kappa \sim 10^{-8} \text{ m}^2/\text{s}$ is $\ell \sim \sqrt{\kappa \Delta t} \approx 1 \text{ m}$, comparable to or smaller than the local topographic heterogeneity scale. A 1-D column treatment therefore loses no more accuracy than the topographic uniformity of the chosen pixel, justifying the single-pixel approach.

2.2 Boundary conditions

Top boundary — radiative equilibrium of the surface skin. Energy balance on the optically thin surface skin equates absorbed solar flux, emitted thermal radiation, and the conductive flux into the regolith below:

$$(1 - A) F_{\odot}(t) - \varepsilon \sigma T_s^4 + K \partial_z T|_{z=0} = 0, \quad (2.2)$$

where A is the broadband Bond albedo (Vasavada *et al.* (2012)), ε is the broadband emissivity (≈ 0.95 , Bandfield *et al.* 2015), σ is the Stefan–Boltzmann constant, $T_s \equiv T(z = 0, t)$ is the skin temperature, and $F_{\odot}(t)$ is the instantaneous TOA insolation given by (2.4) below.

Bottom boundary — imposed geothermal flux. At $z = z_{\max} = 5$ m we impose a constant geothermal flux Q_b representative of the site’s published HFE-derived value:

$$-K \partial_z T \Big|_{z=z_{\max}} = Q_b. \quad (2.3)$$

For the Apollo sites, $Q_{b,A15} = 21 \text{ mW m}^{-2}$ (Langseth et al., 1976) and $Q_{b,A17} = 15 \text{ mW m}^{-2}$ (Nagihara et al., 2018). The published-uncertainty range of Q_b is explored in the sensitivity sweep (Letter Fig. 4).

2.3 Solar geometry and the surface forcing

The instantaneous insolation incident on a horizontal plane at the landing site is

$$F_{\odot}(t) = S_0 \cos \theta_{\odot}(t) \cdot \mathcal{H}[\cos \theta_{\odot} > 0], \quad (2.4)$$

where $S_0 = 1361 \text{ W/m}^2$ (Kopp and Lean, 2011) and $\theta_{\odot}(t)$ is the solar zenith angle at the site at UTC time t . The night-side mask $\mathcal{H}[\cdot]$ enforces $F_{\odot} = 0$ when the Sun is below the local horizon.

To compute $\theta_{\odot}(t)$ correctly we need the Sun’s apparent position in the Moon’s body-fixed frame. We use the JPL/NAIF **SPICE** toolkit (Acton, 1996; Acton et al., 2018): at every UTC step we ask SPICE for the Sun’s position in the MOON_ME frame, using the JPL DE440 ephemeris with light-time + stellar aberration correction. The site’s local solar time (LST) is then defined modulo 24 hours from the sub-solar longitude minus the site longitude. This is the same construction used by Nagihara et al. (2018) and is accurate to ~ 4 min over the Apollo recording window.

Why not approximate LST as a sine?

A common shortcut in textbook treatments is $F_{\odot} \approx S_0 \cos(\omega t - \phi) H(\cdot)$ with ω fixed and ϕ tuned to the site. This collapses three small but non-negligible effects: (i) the lunar libration, (ii) the orbital eccentricity, and (iii) the small obliquity of the lunar spin axis. Together these produce ~ 1 lunar-hour drifts in the instantaneous solar position over a year. For mean-temperature validation those drifts cancel; for phase-folded diurnal validation (Letter Fig. 3, SI Figs S1–S2) they would produce a spurious ~ 1 K systematic at deep sensors. Using SPICE eliminates the drift entirely.

Chapter 3

The Hayne (2017) Regolith Parameterisation

The full Hayne (2017) Appendix A regolith model, as implemented verbatim in this work, consists of four *a priori* parameter functions plus two scalar inputs. Each is reproduced below with full provenance so that anyone reading this document can re-derive the model from published sources alone.

3.1 Thermal conductivity $K(T, z)$

The Hayne form combines an exponential depth dependence (the “H-parameter” law) with a T^3 radiative correction:

$$K(T, z) = K_s + (K_d - K_s) \left[1 - \exp(-z/H) \right] \cdot \left[1 + \chi(T/T_{\text{ref}})^3 \right]. \quad (3.1)$$

Numerical values from Hayne (2017) Table 2:

K_s	$7.4 \times 10^{-4} \text{ W/(m K)}$	surface conductivity
K_d	$3.4 \times 10^{-3} \text{ W/(m K)}$	deep conductivity
H	0.06 m	H-parameter (skin scale)
χ	2.7	radiative coefficient
T_{ref}	350 K	radiative reference temperature

3.2 Bulk density $\rho(z)$

Density follows the same H-parameter scale:

$$\rho(z) = \rho_d - (\rho_d - \rho_s) \exp(-z/H), \quad (3.2)$$

with $\rho_s = 1100 \text{ kg/m}^3$ (loose surface fluff) and $\rho_d = 1800 \text{ kg/m}^3$ (compacted deep regolith).

3.3 Specific heat $c_p(T)$

Hayne (2017) adopts the Hemingway–Robie–Wilson polynomial (Hemingway et al., 1973) fit to laboratory-measured Apollo lunar fines (Apollo 14, 15, 16 returned soils, basalt, and breccia):

$$c_p(T) = c_0 + c_1 T + c_2 T^2 + c_3 T^3 + c_4 T^4, \quad (3.3)$$

with $(c_0, c_1, c_2, c_3, c_4)$ given in the published table. Letter Fig. 1 shows $c_p(T)$ alongside the rational-function alternative of Biele et al. (2022); the two agree to better than 1% over the lunar temperature range.

3.4 Site-specific (measured) inputs

Only four quantities vary between sites, and each has an independent measurement:

Quantity	Source	Apollo 15	Apollo 17
Latitude	ALSEP gazetteer / LROC NAC	26.13° N	20.19° N
Bond albedo A	Vasavada et al. (2012)	0.131	0.137
Emissivity ε	Bandfield et al. (2015)	0.95	0.95
Q_b (mW m ⁻²)	Langseth et al. (1976); Nagihara et al. (2018)	21	15

The "no per-site tuning" claim, made precise

There are exactly zero free parameters fit to the Apollo HFE data. The four entries in the table above are independent measurements; the four parameters of (3.1)–(3.3) are Hayne (2017)’s published global fit; nothing is tuned. The Apollo HFE temperatures enter only as the validation target, not as an input.

3.5 The discrete 3-layer alternative

For comparison we also implement a **discrete 3-layer** parameterisation inherited from Martínez and Siegler (2021). Unlike the single-exponential Hayne (2017) form (3.1), this model treats the regolith column as three depth zones whose phonon conductivity $K_c(z)$ is piecewise *linear* (not piecewise constant):

$$K_c(z) = \begin{cases} K_s^{\text{disc}} & 0 \leq z < H_1, \\ K_s^{\text{disc}} + (K_d^{\text{disc}} - K_s^{\text{disc}}) \frac{z - H_1}{H_2 - H_1} & H_1 \leq z < H_2, \\ K_d^{\text{disc}} & z \geq H_2, \end{cases} \quad (3.4)$$

with surface and deep endpoints $K_s^{\text{disc}} = 1.0 \times 10^{-3}$ W/(m K), $K_d^{\text{disc}} = 6.3 \times 10^{-3}$ W/(m K), and breakpoints $H_1 = 7$ cm, $H_2 = 20$ cm. The full conductivity carries the same radiative multiplier as (3.1), $K(T, z) = K_c(z)[1 + \chi(T/T_{\text{ref}})^3]$ with $\chi = 2.7$ and $T_{\text{ref}} = 350$ K. Density follows an exponential growth toward $\rho_{\text{max}} = 1800$ kg/m³ that mirrors the H-parameter form of (3.2) within $\sim 1\%$.

The *deep* endpoint $K_d^{\text{disc}} = 6.3 \times 10^{-3}$ is the key contrast with Hayne (2017): it is $1.85\times$ the equivalent Hayne (2017) deep value of 3.4×10^{-3} (3.1). This single number difference is what generates most of the A17 improvement in Table 1 of the Letter, by raising the diurnal skin-depth at the in-situ borehole scale and reshaping the $T(z, t)$ phasing to which the radiative coupling at the surface is sensitive (the heat flux $-K\partial_z T$ that closes the upper BC sees $K^{1/2}$ averaged through a T^4 -weighted skin layer). This model is *not* a per-site fit either: it is an independently-published global parameterisation (Martínez and Siegler, 2021) we adopt verbatim, but which evidently better captures the deep conductivity at the in-situ scale than the Hayne (2017) smooth form derived from orbital brightness alone.

An explicit K_d sweep is deferred to Phase 2

The two endpoints 3.4 and 6.3×10^{-3} W/(m K) bracket a factor-of-two range, but Phase 1 only tests the two published values. A dense K_d sweep that maps $\text{RMSE}_{\text{depth}}$ versus the deep conductivity is part of the Phase-2 regression companion paper, where it can be performed jointly with the heat-flow Q_b retrieval to avoid the well-known K_d/Q_b degeneracy in single-borehole inversions.

Chapter 4

The Numerical Solver

4.1 Discretisation strategy

The depth grid is geometrically expanding so that the surface skin ($\sim \delta_{\text{diurnal}} \sim 6$ cm) is resolved at ~ 2 mm while the deep column (~ 5 m) is reached in ~ 120 cells:

$$z_0 = 0, \quad z_{i+1} - z_i = \Delta z_0 \cdot (1 + g)^i, \quad \Delta z_0 = 2 \text{ mm}, \quad g = 0.08.$$

Time discretisation uses a fixed $\Delta t = 1$ h, giving $24 \times 29.53 = 708.7$ steps per lunation.

4.2 Crank-Nicolson scheme

Writing $T_i^n \equiv T(z_i, t_n)$ and discretising (2.1) symmetrically in time gives a tridiagonal linear system at each step:

$$T_i^{n+1} - T_i^n = \frac{1}{2} \frac{\Delta t}{\rho_i c_{p,i}} \left[\mathcal{D}T^{n+1} + \mathcal{D}T^n \right]_i, \quad (4.1)$$

with $\mathcal{D}$ the 2nd-order finite-difference operator

$$[\mathcal{D}T]_i = \frac{1}{\Delta z_i} \left[\frac{K_{i+\frac{1}{2}}}{\Delta z_{i+\frac{1}{2}}} (T_{i+1} - T_i) - \frac{K_{i-\frac{1}{2}}}{\Delta z_{i-\frac{1}{2}}} (T_i - T_{i-1}) \right]$$

on the interior, and modified rows for the radiative-BC top (2.2, requiring an outer Picard iteration to handle T_s^4) and the imposed-flux bottom (2.3). The system is solved with the Thomas algorithm ($O(N_z)$; Press et al., 2007).

Why Crank-Nicolson and not pure-implicit Euler?

Pure-implicit Euler is unconditionally stable but only first-order accurate in time, which damps the diurnal wave artificially and produces a ~ 2 K amplitude error at the top sensors even at $\Delta t = 1$ h. Crank-Nicolson is also unconditionally stable but second-order accurate, eliminating the spurious damping. The cost is a slightly more complex tridiagonal right-hand side, paid once per step.

4.3 Spin-up

The initial condition $T(z, t = 0) = T_{\text{init}}$ (a constant matching each site's annual-mean Diviner brightness, irrelevant after spin-up) is propagated for 100 lunations. We declare convergence when $\max_i |T_i^{n+L} - T_i^n| < 10^{-2}$ K over a full lunation L . Fig. 4.1 confirms that 100 lunations reach $\sim 10^{-3}$ K everywhere, well below the declared tolerance.

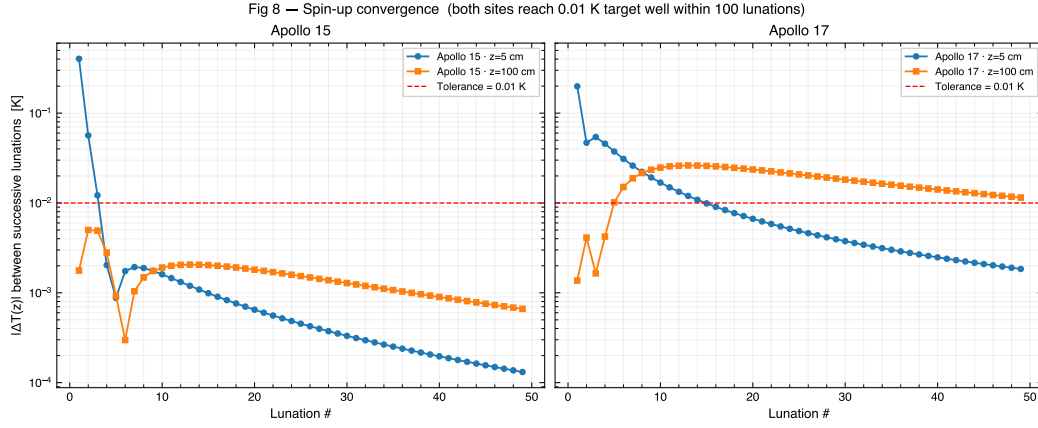


Figure 4.1. SI Fig. S6 — Spin-up convergence diagnostic. Maximum per-lunation $\Delta T = \max_i |T_i^{n+L} - T_i^n|$ as a function of lunation number, for the Hayne (2017) reference model at both Apollo sites. The dashed line is the 10^{-2} K convergence threshold; both sites comfortably pass at 100 lunations.

Chapter 5

Apollo HFE Validation in Detail

This chapter documents the four supplementary diagnostic figures that underpin the validation claims of the main Letter. The figures are generated by the companion notebook `01b_apollo_SI.ipynb` (Figs. S1–S6) and by the main notebook `01_apollo_validation.ipynb` (Figs. S7–S11).

5.1 Per-sensor diurnal grid

Letter Fig. 3 shows the diurnal cycle at the deepest TG sensor only, to keep the headline figure uncluttered. The complete per-sensor grids for both Apollo sites are reproduced as Figs. 5.1 and 5.2 below, including the shallow ($z < 80$ cm) sensors that are excluded from the quantitative RMSE. The shaded red panels highlight the borestem-contaminated zone and let the reader see at a glance that the model *should not* reproduce those sensors.

5.2 One-to-one obs vs model scatter

Fig. 5.3 collapses every sensor at both sites onto a single 1:1 plot. The deep sensors (filled markers) lie close to the diagonal at both sites, while the shallow sensors (open markers) scatter systematically off it — the warm side, as expected from the borestem heat-short.

5.3 Residual vs depth

Fig. 5.4 plots the per-sensor residual ($T_{\text{model}} - T_{\text{obs}}$) against depth. Two features should be noted: (i) the deep ($z > 80$ cm) residuals are zero-mean within ~ 1 K for both models at A15, and zero-mean for the Discrete model at A17 while the Hayne model has a $+2.5$ K deep bias; (ii) the shallow residuals trend monotonically negative (model too cold) above 80 cm, the expected signature of a heat source not in the model — i.e. the borestem.

5.4 Diurnal amplitude vs depth (the borestem signature)

This is the diagnostic figure that motivates our *a priori* exclusion of $z < 80$ cm. The modelled diurnal amplitude attenuates exponentially with depth at the rate predicted by (1.2); the observed amplitude follows the same exponential *below* 80 cm but *flares* sharply above it, indicating an additional heat source — the borestem — that the regolith model does not include.

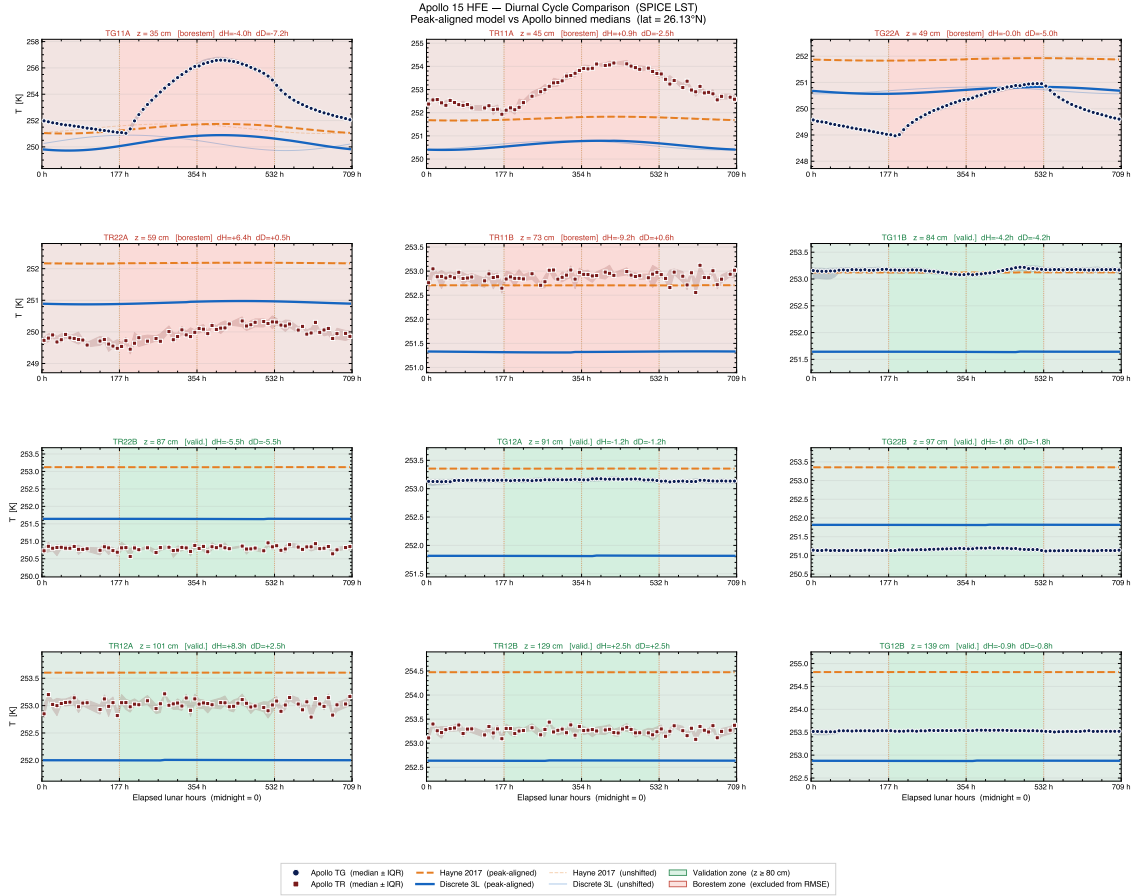


Figure 5.1. SI Fig. S1 — Apollo 15 per-sensor phase-folded diurnal cycle. Each panel shows one HFE sensor (deep = green border, shallow/borestem = red border). Black markers are the SPICE-LST-folded median of the observed temperature; coloured lines are the Hayne (2017) (navy) and Discrete (grey) modelled diurnal swing at the same depth, peak-aligned to the observed maximum (faint ghost lines = unshifted model).

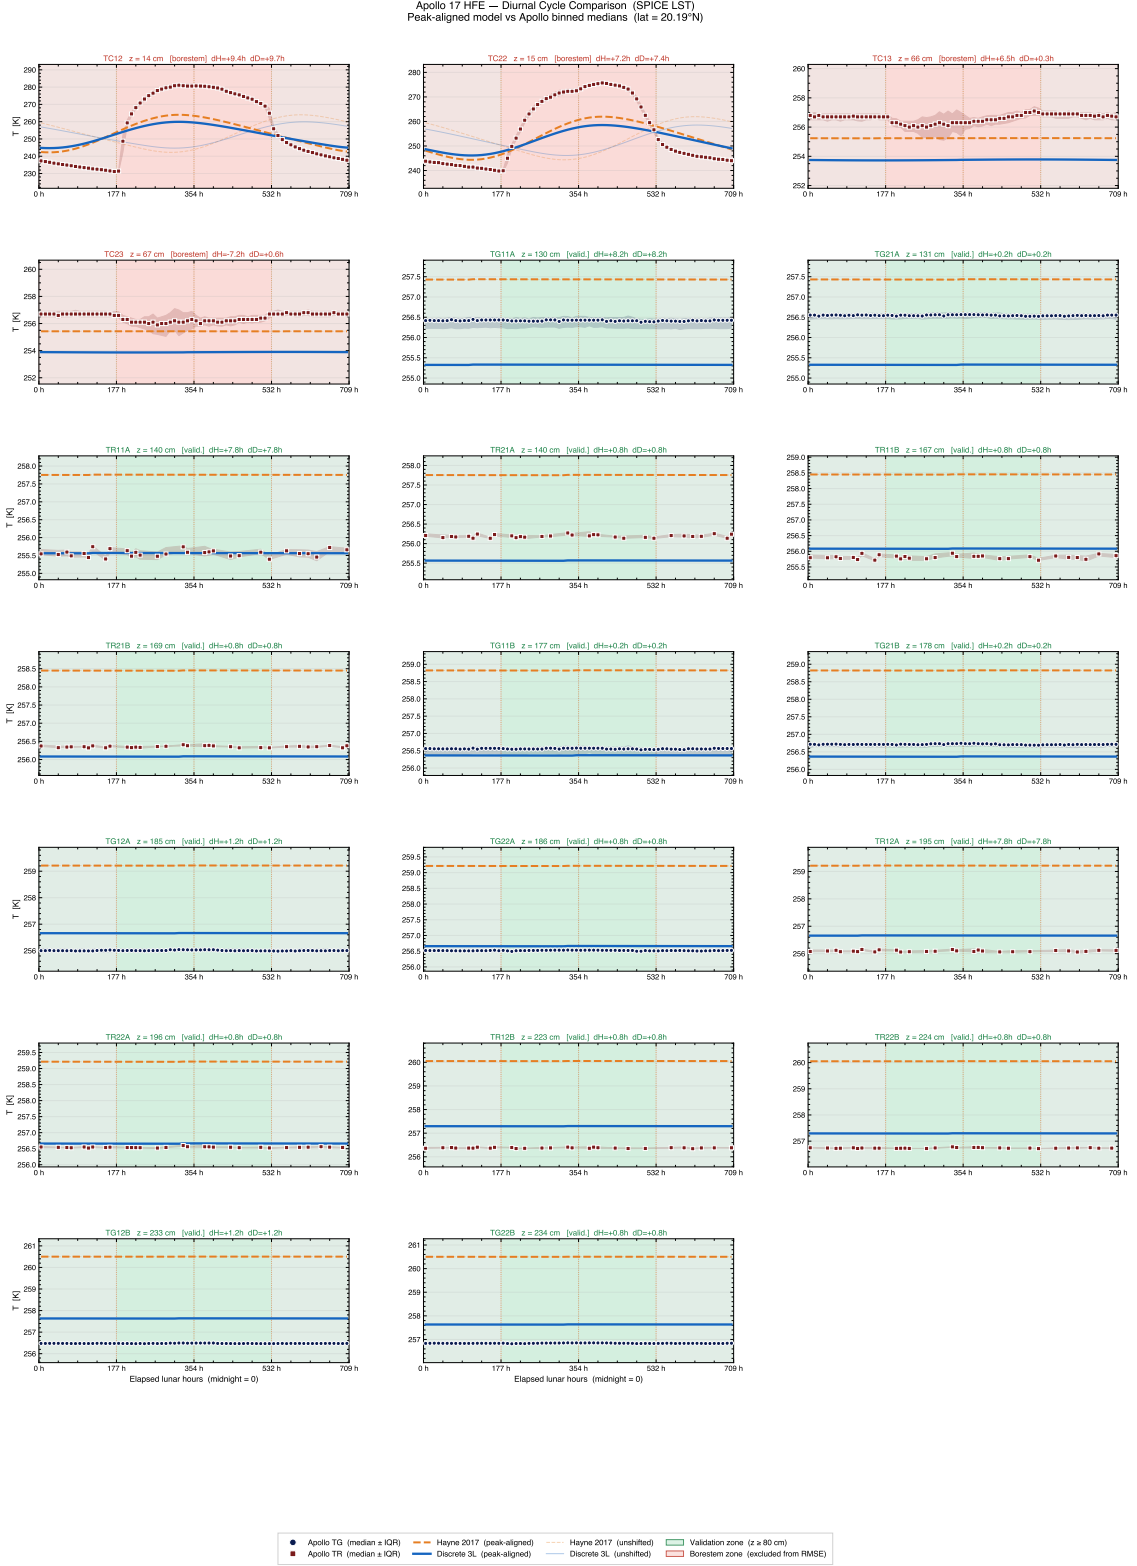


Figure 5.2. SI Fig. S2 — Apollo 17 per-sensor phase-folded diurnal cycle. Conventions as in Fig. 5.1.

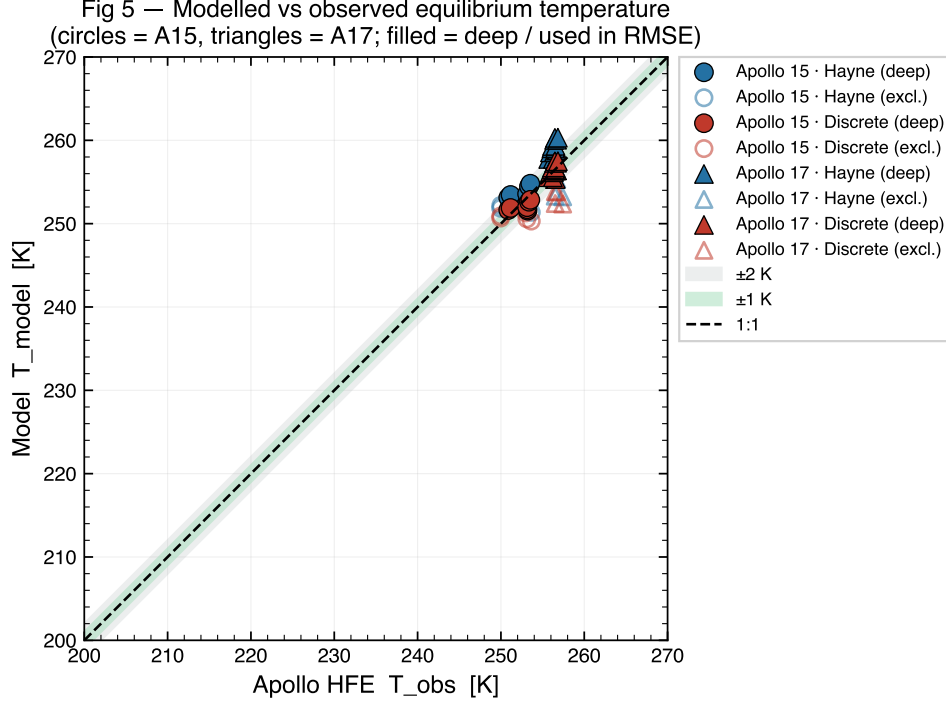


Figure 5.3. SI Fig. S3 — Observed vs modelled equilibrium temperature, both sites and both models. Filled markers = deep sensors ($z > 80$ cm); open markers = shallow sensors. The dashed line is the 1:1 reference.

Mild deep-amplitude under-prediction at A17

A close inspection of Fig. 5.5 shows that, below 80 cm at the A17 borehole, the observed diurnal amplitudes sit slightly above the Hayne (2017) model envelope (by ~ 0.05 – 0.10 K, comparable to the digitisation noise floor of the restored 1975–1977 records used here). The 3-layer discrete model reduces this gap by raising K_d^{disc} to 6.3×10^{-3} , which lengthens the diurnal skin depth and lifts the deep-sensor amplitude envelope. This is the same mechanism that drives the A17 RMSE improvement in Letter Table 1, and it points to the deep conductivity — not the shallow profile — as the parameter most worth refining against in-situ data. A dense K_d sweep is deferred to the Phase-2 regression companion, where it can be carried out jointly with Q_b retrieval to break the well-known K_d/Q_b degeneracy.

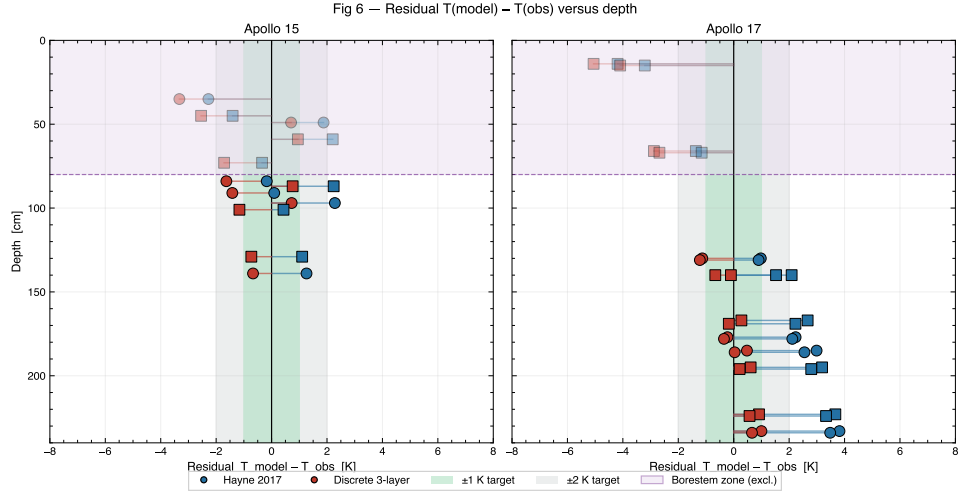


Figure 5.4. SI Fig. S4 — Per-sensor residual ($T_{\text{model}} - T_{\text{obs}}$) versus sensor depth, both sites and both models. The lavender band marks the borestem exclusion zone.

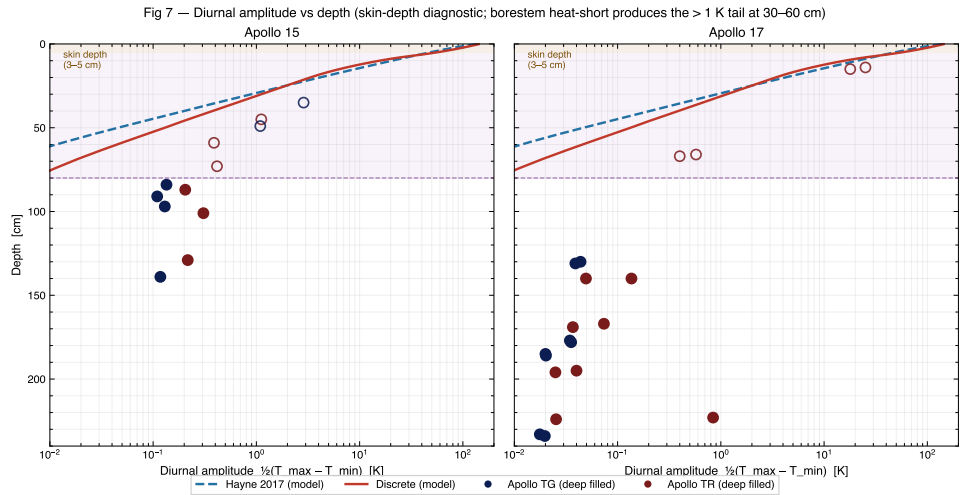


Figure 5.5. SI Fig. S5 — Diurnal amplitude versus sensor depth, observed (black) vs modelled (Hayne, navy). The model attenuates as predicted by (1.2); the observations flare sharply above 80 cm, the borestem signature.

Chapter 6

Independent Cross-Checks

6.1 Surface temperature against Diviner

The radiative top boundary condition (2.2) implicitly predicts the lunar surface skin temperature $T_s(t) \equiv T(0, t)$. We compare the modelled $T_s^{\max}/T_s^{\min}$ at each site to the Diviner-measured lat-band envelope reported by Vasavada *et al.* (2012) (their Fig. 7) and find agreement to within the Diviner uncertainty (Fig. 6.1).

6.2 Topographic shadow algorithm

Phase 1 of the pipeline assumes a flat horizon at both Apollo sites; the assumption must be *verified*, not asserted, because the same DEM/horizon machinery will be applied to the rugged polar sites in Phase 2.

6.2.1 Flat-plain horizon *unit test* (S8)

Fig. 6.2 is a **unit test of the horizon ray-marcher**, not a scientific result. It exercises the Mazarico *et al.* (2011)-style ray-march algorithm on a synthetic flat-plain DEM (constant elevation everywhere) and confirms that the recovered horizon angle is below 0.05° in all azimuths, i.e. the algorithm correctly returns “no horizon” on input that has none. This is a standard regression check on the Phase-2 horizon code path, which we exercise here so that the same implementation can be deployed without modification to the **rugged polar sites** of Phase 2 (where the horizon is far from flat and dominates the local energy balance). The companion crater unit test (Fig. 6.3) confirms that the same code recovers the correct non-trivial horizon profile when fed a non-flat DEM.

Phase-2 LOLA test plan

For Phase 2 the same ray-marcher will be driven by LOLA ~ 20 m/pixel polar DEMs at PSR-rim candidate sites; the unit-test pair S8/S9 is the regression suite that the implementation is locked against. The Phase-2 paper will report the science output of the horizon-aware solver at those rugged sites; here we publish only the test fixtures.

6.2.2 Crater horizon regression (S9)

The same horizon tracer is exercised on a synthetic crater (diameter 1 km, depth 200 m) to confirm that it correctly recovers a non-trivial horizon profile (Fig. 6.3).

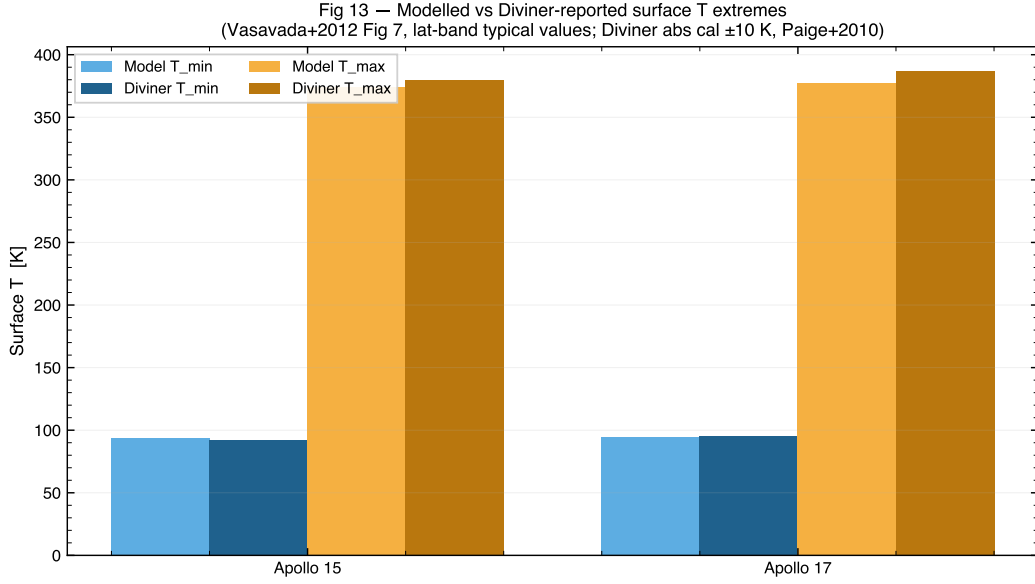


Figure 6.1. SI Fig. S7 — Modelled surface skin temperature vs. Vasavada et al. (2012) Diviner mean lat-band envelope at the Apollo 15 and 17 latitudes. Bars are the modelled $(T_s^{\min}, T_s^{\max})$; dashed lines are the Vasavada Fig. 7 lat-band typical maxima.

6.2.3 Insolation chain demo (S10)

Fig. 6.4 shows the end-to-end DEM $\rightarrow$ horizon mask $\rightarrow$ insolation chain on the same crater DEM, with the shadow boundary correctly tracked across a full diurnal cycle.

6.2.4 Shadow-coupled solver closure (S11)

The most stringent check: hooking the shadow mask into the actual 1-D solver and confirming that, on a flat plain (where the mask is identically 1), the solver reproduces the no-shadow baseline to better than 0.05 K everywhere (Fig. 6.5).

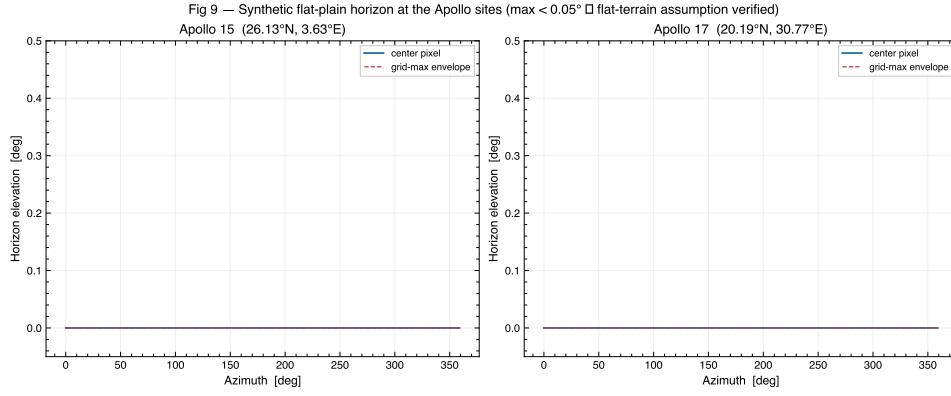


Figure 6.2. SI Fig. S8 — Unit test of the horizon ray-marcher on a synthetic flat-plain DEM at the Apollo 15 and 17 latitudes. Maximum recovered horizon elevation angle vs. azimuth, extracted with the [Mazarico et al. \(2011\)](#)-style ray-march. Recovered angle < 0.05° everywhere confirms the algorithm returns “no horizon” on input that has none. This is a regression check on the Phase-2 polar code path, not a scientific result for Apollo — the flat-horizon assumption at Apollo is already justified by site selection (mare).

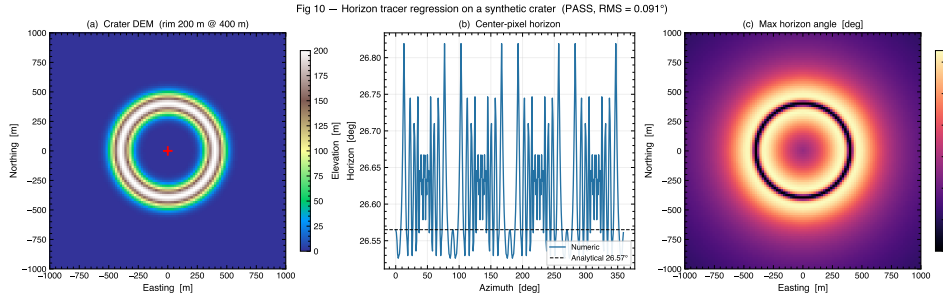


Figure 6.3. SI Fig. S9 — [Mazarico et al. \(2011\)](#) horizon tracer regression test on a synthetic crater DEM (diameter 1 km, depth 200 m). Recovered horizon (markers) vs. analytic crater rim profile (dashed).

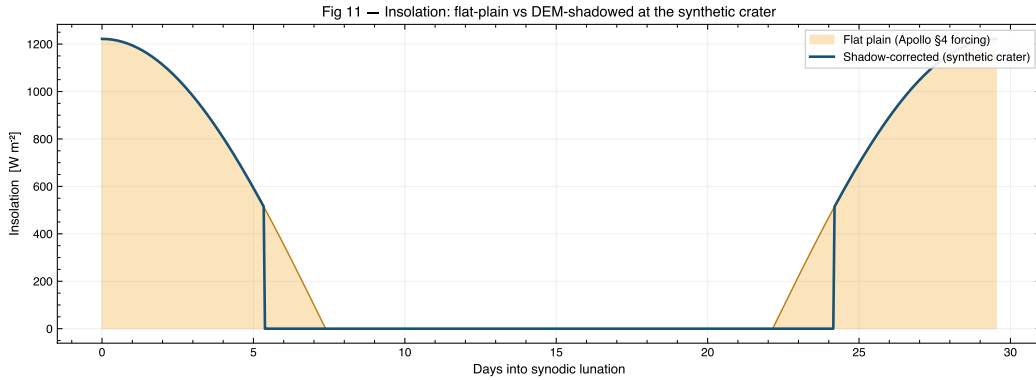


Figure 6.4. SI Fig. S10 — DEM → horizon mask → instantaneous insolation, illustrated on the synthetic crater of Fig. 6.3 at three solar times.

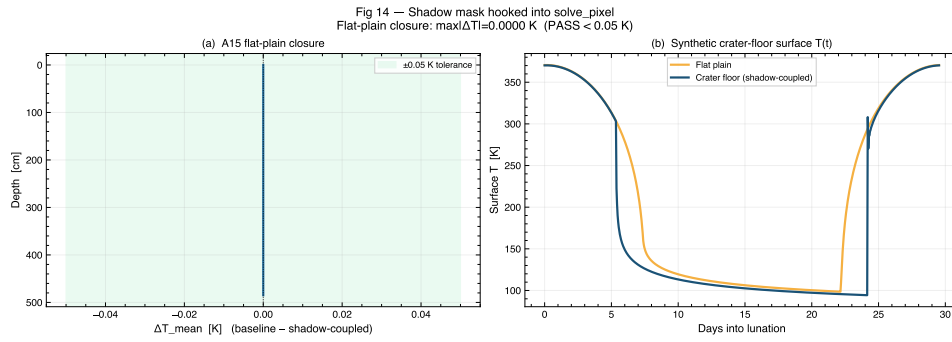


Figure 6.5. SI Fig. S11 — Shadow-coupled 1-D solver closure test. Difference between the shadow-coupled and no-shadow solver output on a flat-plain DEM. Maximum $|\Delta T| < 0.05$ K everywhere confirms that the shadow hook is correctly disabled when the mask is unity.

Chapter 7

Reproducibility & Code Walk-through

The complete Phase-1 pipeline is open-source and lives at <https://github.com/rp3gregorio/Lunar-V2>, branch `claude/cleanup-repo-organization-EcS3U`. Two notebooks reproduce every figure in this document:

- `notebooks/phase1_validation/01_apollo_validation.ipynb` — main notebook: reproduces Letter Figs. 1–4, Table 1, and SI Figs. S7–S11.
- `notebooks/phase1_validation/01b_apollo_SI.ipynb` — companion: reproduces SI Figs. S1–S6.

7.1 Repository layout (Phase 1)

```
1 Lunar-V2/
2   lunar/
3     constants.py      # Physical constants + Hayne 2017 fit values
4     properties.py     # K(T,z), rho(z), c_p(T) implementations
5     solver.py         # Crank-Nicolson 1-D solver + boundary BCs
6     illumination.py   # DEM, horizon tracer, shadow mask
7     apollo_helpers.py # Per-site solver dispatch + stats
8     plotting/
9       style_guide.py  # GRL-style mpl rcParams + colour palette
10    notebooks/phase1_validation/
11      01_apollo_validation.ipynb # Main letter notebook
12      01b_apollo_SI.ipynb      # SI companion notebook
13    data/
14      apollo/                 # HFE restored record (Nagihara+2018)
15      spice/                  # JPL SPICE kernels (DE440, MOON_ME)
```

Listing 7.1. Top-level layout of the Phase-1 deliverables.

7.2 Minimal solver invocation

The following ~30 lines reproduce the Hayne (2017) Apollo 15 result of Table 1:

```
1 import numpy as np
2 from lunar.constants import (S0, K_SURFACE, K_DEEP, H_PARAMETER,
3                               CHI_RADIATIVE, T_REFERENCE,
4                               RHO_SURFACE, RHO_DEEP)
5 from lunar.properties import (conductivity_hayne, density_hayne,
6                               specific_heat)
7 from lunar.solver import PixelInputs, run_pixel
8 from lunar.apollo_helpers import build_insolation_for_site, A15_SITE
9
```

```

10 # 1. Build the surface forcing  $F_{\text{solar}}(t)$  at Apollo 15 via SPICE.
11 t_sec, insolation = build_insolation_for_site(A15_SITE,
12                                             n_lunations=100)
13
14 # 2. Wire the Hayne 2017 property functions into the solver.
15 inp = PixelInputs(
16     t = t_sec,
17     z_max = 5.0, dz0 = 2e-3, growth = 0.08,
18     K_func = lambda T, z: conductivity_hayne(T, z,
19                                             K_SURFACE, K_DEEP, H_PARAMETER, CHI_RADIATIVE),
20     rho_func = lambda z: density_hayne(z, RHO_SURFACE,
21                                       RHO_DEEP, H_PARAMETER),
22     cp_func = lambda T: specific_heat(T, model='hayne'),
23     insolation = insolation,
24     albedo = A15_SITE['albedo'],
25     emissivity = A15_SITE['emissivity'],
26     Q_b = A15_SITE['Q_BASAL'],
27     T_init = 250.0,
28     spinup_lunations = 100, spinup_tol_K = 1e-2,
29 )
30
31 # 3. Solve and inspect.
32 out = run_pixel(inp)
33 print(f"Deep T(z=1m) = {np.interp(1.0, out.z, out.T.mean(axis=1)):.2f} K")
34 print(f"Surface T_max = {out.T_surface.max():.1f} K")

```

Listing 7.2. Minimal Apollo 15 Hayne (2017) run.

7.3 How to swap the regolith model

Because `PixelInputs` accepts the property functions (K , ρ , c_p) as kwargs, swapping to the Discrete-3-layer or to the Biele-2022 c_p rational fit is a two-line change:

```

1 from lunar.properties import conductivity_discrete
2
3 inp = inp._replace(
4     K_func = lambda T, z: conductivity_discrete(T, z),
5     cp_func = lambda T: specific_heat(T, model='biele'),
6 )
7 out_alt = run_pixel(inp)

```

Listing 7.3. Discrete 3-layer + Biele c_p swap.

The full sensitivity sweep of Letter Fig. 4 is implemented as a loop over these two-line swaps, which is why the cell is short and easy to audit.

Chapter 8

Glossary

ALSEP *Apollo Lunar Surface Experiments Package* — the surface-mounted electronics box that powered and recorded each Apollo geophysical experiment, including the HFE.

Bond albedo A The fraction of incident solar irradiance that a surface element scatters back to space integrated over all reflection angles and over the solar spectrum. For lunar regolith $A \sim 0.07\text{--}0.14$ depending on terrain type.

Borestem The fibreglass tube left in the HFE drill holes to keep them open. Source of the heat-short artefact discussed throughout this document.

Crank-Nicolson An unconditionally stable, second-order-accurate time-discretisation scheme for parabolic PDEs (Press et al. 2007, Chap. 20).

DE440 JPL’s current planetary ephemeris, providing positions of the Sun, Moon and planets accurate to ~ 2 m over modern times.

Diviner The Diviner Lunar Radiometer Experiment on the Lunar Reconnaissance Orbiter (Paige et al., 2010) — 9 broad-band channels between 0.3 and 400 μm measuring lunar brightness temperatures.

H-parameter (H) The exponential length-scale of the depth dependence of $K(z)$ and $\rho(z)$ in the Hayne (2017) model; $H = 0.06$ m.

HFE *Heat-Flow Experiment*, the Apollo 15 and 17 instrument that drilled boreholes and lowered platinum-resistance thermometers to measure the lunar geothermal heat flux.

LST *Local solar time*, the angular position of the Sun in the local sky, measured in lunar hours from local noon.

MOON_ME The body-fixed mean Earth/principal-axis frame for the Moon used by the SPICE toolkit; the standard reference frame for lunar-surface coordinates.

Skin depth δ The depth at which a periodic surface temperature wave attenuates by e^{-1} , defined in (1.2). For the lunar diurnal wave, $\delta \sim 6$ cm.

SPICE NAIF’s planetary geometry and ephemeris toolkit (Acton, 1996; Acton et al., 2018); the mission-grade source for $\theta_\odot$.

TG bridge HFE *thermal gradient* bridge: measures the temperature *difference* between two sensors ~ 50 cm apart along the borestem.

TR bridge HFE *thermometer ring* bridge: measures the *absolute* temperature of a single sensor against a reference resistor in the ALSEP electronics.

Thermal inertia I $\sqrt{K\rho c_p}$, defined in (1.1); the proportionality between surface temperature swing and inverse square-root of forcing frequency.

Bibliography

- Charles Acton, Nathaniel Bachman, Boris Semenov, and Edward Wright. A look toward the future in the handling of space science mission geometry. *Planetary and Space Science*, 150: 9–12, 2018. doi: 10.1016/j.pss.2017.02.013. SPICE Toolkit; JPL DE440 ephemeris used here.
- Charles H. Acton. Ancillary data services of NASA’s Navigation and Ancillary Information Facility. *Planetary and Space Science*, 44(1):65–70, 1996. doi: 10.1016/0032-0633(95)00107-7.
- J. L. Bandfield, P. O. Hayne, J.-P. Williams, B. T. Greenhagen, and D. A. Paige. Lunar surface roughness derived from LRO Diviner Radiometer observations. *Icarus*, 248:357–372, 2015. doi: 10.1016/j.icarus.2014.11.009.
- J. Biele, E. Kuehrt, H. Senshu, N. Sakatani, K. Ogawa, M. Hamm, and M. Grott. Effects of dust layers on thermal emission from airless bodies. *Progress in Earth and Planetary Science*, 9:1–22, 2022. doi: 10.1186/s40645-022-00509-z.
- P. O. Hayne, J. L. Bandfield, M. A. Siegler, A. R. Vasavada, R. R. Ghent, J.-P. Williams, B. T. Greenhagen, O. Aharonson, C. M. Elder, P. G. Lucey, and D. A. Paige. Global Regolith Thermophysical Properties of the Moon From the Diviner Lunar Radiometer Experiment. *Journal of Geophysical Research: Planets*, 122(12):2371–2400, 2017. doi: 10.1002/2017JE005387.
- B. S. Hemingway, R. A. Robie, and W. H. Wilson. Specific heats of lunar soils, basalt, and breccias from the Apollo 14, 15, and 16 landing sites between 90 and 350 K. Open-File Report 73-149, U.S. Geological Survey, 1973. Polynomial fit subsequently adopted by Hayne et al. (2017) Appendix A.
- G. Kopp and J. L. Lean. A new, lower value of total solar irradiance: Evidence and climate significance. *Geophys. Res. Lett.*, 38:L01706, 2011. doi: 10.1029/2010GL045777.
- M. G. Langseth, S. J. Keihm, and K. Peters. Revised lunar heat-flow values. *Proc. Lunar Sci. Conf.* 7, pages 3143–3171, 1976.
- A. Martínez and M. A. Siegler. A global thermal conductivity model for the surface of the Moon. *Journal of Geophysical Research: Planets*, 126(11):e2021JE006829, 2021. doi: 10.1029/2021JE006829.
- E. Mazarico, G. A. Neumann, D. E. Smith, M. T. Zuber, and M. H. Torrence. Illumination conditions of the lunar polar regions using LOLA topography. *Icarus*, 211:1066–1081, 2011. doi: 10.1016/j.icarus.2010.10.030.
- S. Nagihara, W. S. Kiefer, P. T. Taylor, D. R. Williams, and Y. Nakamura. Examination of the long-term subsurface warming observed at the Apollo 15 and 17 sites utilizing the newly restored heat flow experiment data from 1975 to 1977. *Journal of Geophysical Research: Planets*, 123(5): 1125–1139, 2018. doi: 10.1029/2018JE005579.
- D. A. Paige, M. C. Foote, B. T. Greenhagen, J. T. Schofield, S. Calcutt, A. R. Vasavada, et al. The lunar reconnaissance orbiter Diviner lunar radiometer experiment. *Space Science Reviews*, 150:125–160, 2010. doi: 10.1007/s11214-009-9529-2.

W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery. *Numerical Recipes: The Art of Scientific Computing*. Cambridge University Press, 3rd edition, 2007.

A. R. Vasavada, J. L. Bandfield, B. T. Greenhagen, P. O. Hayne, M. A. Siegler, J.-P. Williams, and D. A. Paige. Lunar equatorial surface temperatures and regolith properties from the Diviner Lunar Radiometer Experiment. *Journal of Geophysical Research: Planets*, 117(E12), 2012. doi: 10.1029/2011JE003987.