



3.3V Supplied from Power Distribution Circuit

SOLENOID_DRIVE Continues on Solenoid Schematic


SOLENOID_POS_READ Continues on Solenoid Schematic

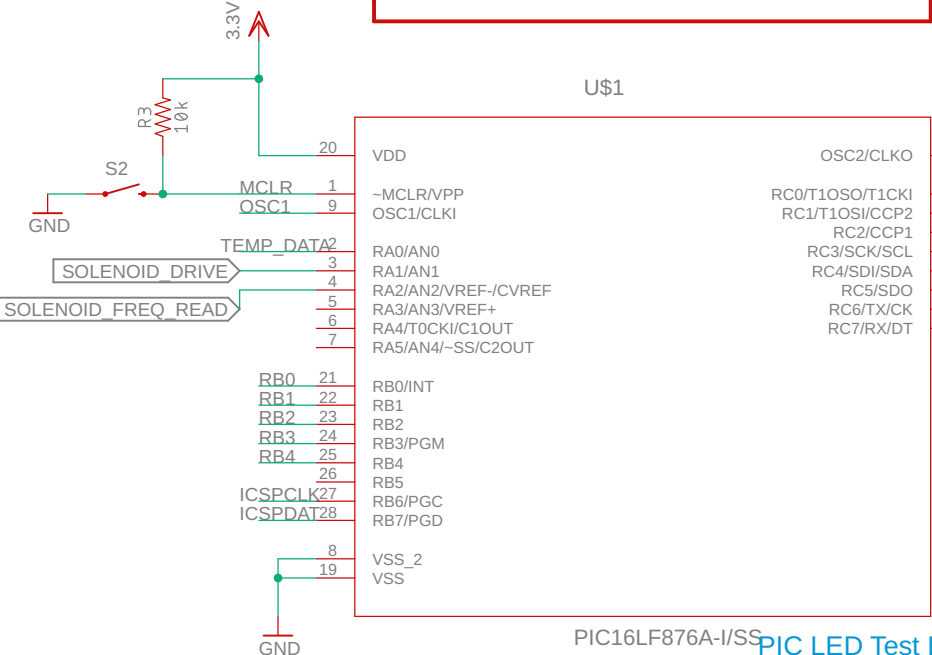


Bluetooth Settings Control

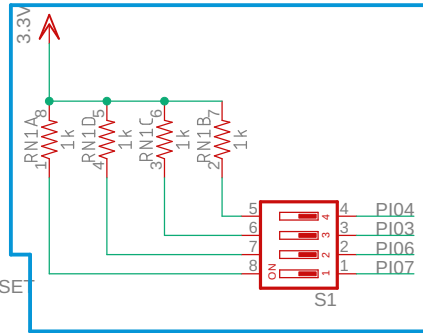


Bluetooth Status LED's

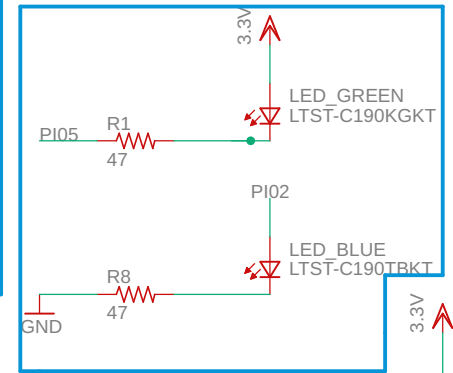


PIC LED Test LED

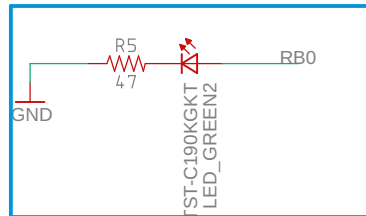


External Clock





Connection for PIKit 3

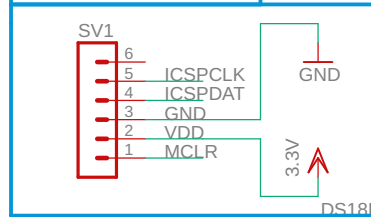

Temperature Sensor

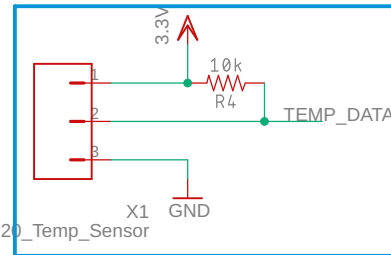

LED's On Top of Bobber

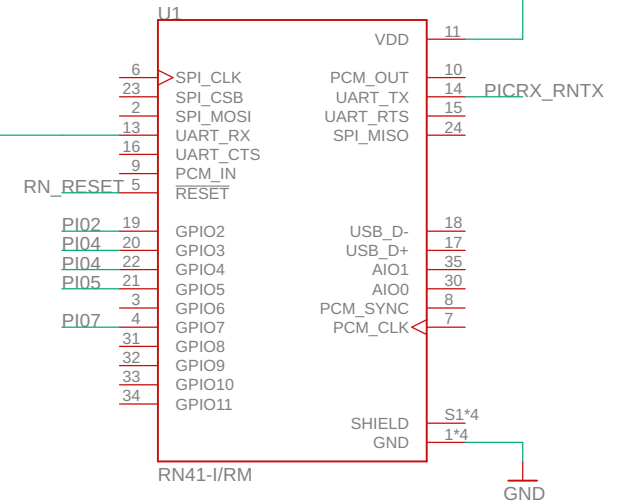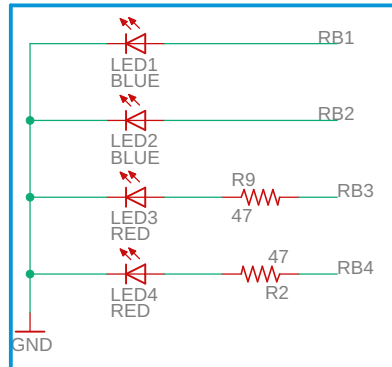

TITLE: Embedded System		
Document Number:		REV:
Date: 11/26/2018 9:08 PM		Sheet: 1/1