MECH 364: Assignment 4

Requires course text book: Mechanical Vibrations by S.S. Rao (4th Edition). Solutions will appear approximately ten days after the assignment is posted on VISTA.

Q1. A simplified model of a washing machine is illustrated in Figure below. A bundle of wet clothes forms a mass of 10 kg (m_b) in the machine and causes a rotating unbalance. The rotating mass is 20 kg (including the mass of the wet clothes) and the diameter of the washer basket (2e) is 50 cm. Assume that the spin cycle is set at 300 rpm.

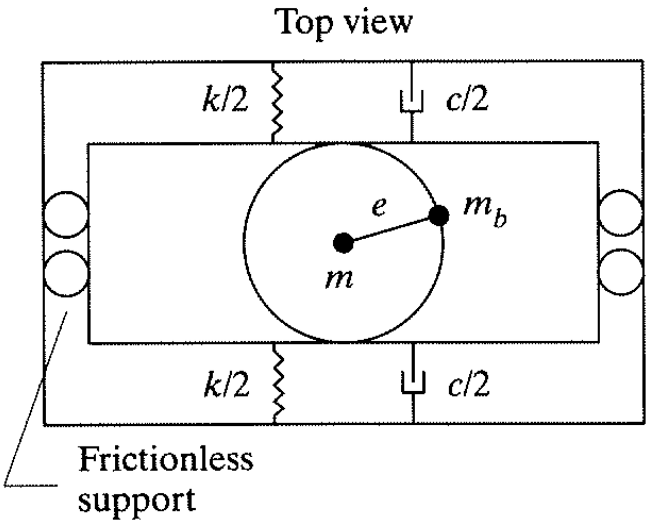

Figure A4.1: Figure for Question 1.

a) Let k be 1000 N/m and damping ratio $\zeta = 0.01$. Calculate the force transmitted to the sides of the washing machine through the springs and damper. Clearly state any assumptions you made using your knowledge on how washing machines work.

b) It is desired to design an isolation system (choose k and c) such that the force transmitted to the sides of the washing machine is less than 100 N at the operating speed, while the maximum transmitted force possible during the operation should not exceed twice the force generated. Find the spring constant k and dashpot coefficient c.

c) What is the role of frictionless supports? Find the maximum reaction exerted by the guides on the wall.