

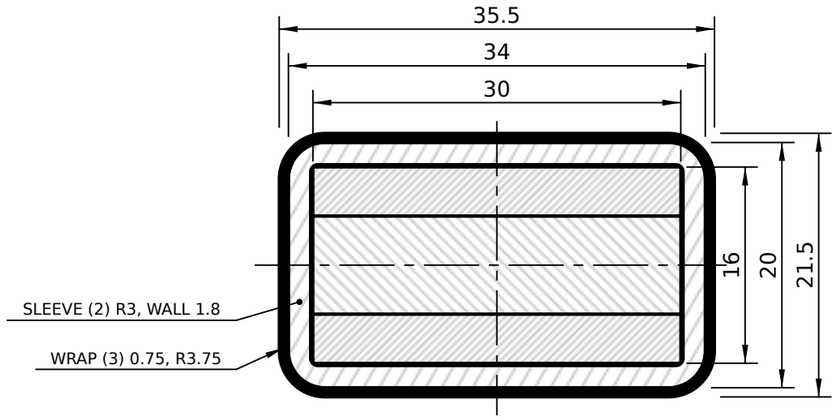


SECTION E–E
SCALE 2:1

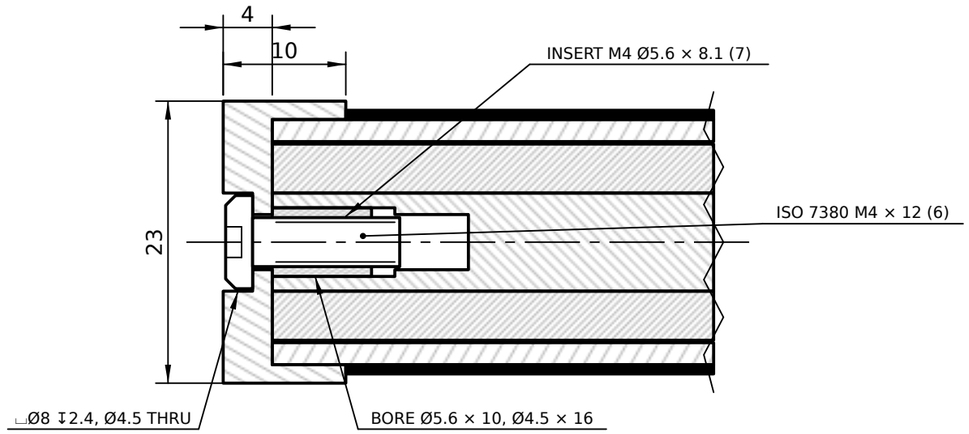

SECTION F–F (BUTT END)
SCALE 2:1

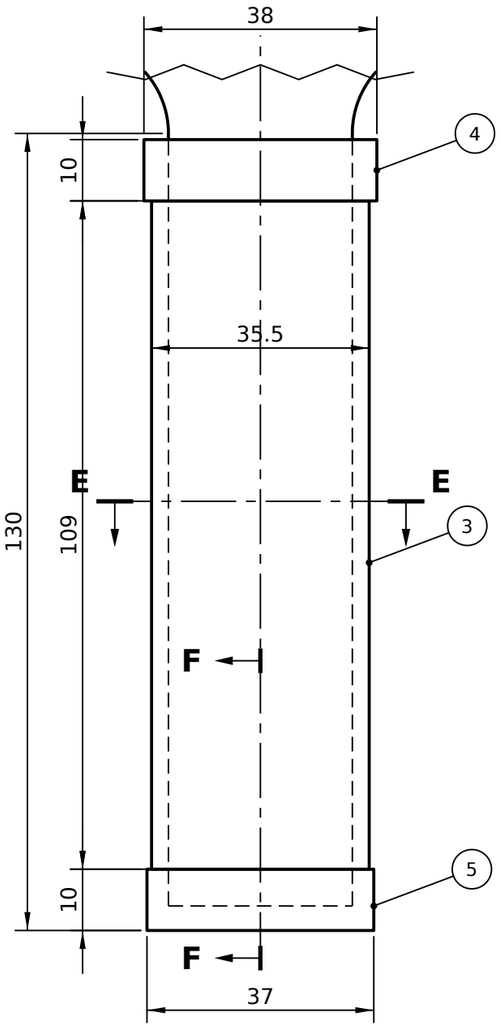

HANDLE (FACE VIEW)
SCALE 1:1

ITEM	PART	MATERIAL / SPECIFICATION	QTY	MASS g (EL / HY)
1	Face sheet	Woven carbon/epoxy plate 4 thk, cut to profile DXF	2	304 / 285
1a	Rib core	PA-CF, 3D printed – sheet 3 of PB-EL-001 / PB-HY-001	1	179 / 170
2	Grip sleeve	TPU 95A, printed or moulded, 34 × 20 R3	1	26
3	Grip wrap	PU replacement grip 0.75 thk, 109 long	1	9.5
4	Throat collar	TPU 95A, 38 × 24 × 10	1	1.7
5	Butt cap	TPU 95A, 37 × 23, base 4 + skirt 6	1	5.0
6	Screw	ISO 7380-1 M4 × 12 button head, A2 stainless	1	1.8
7	Threaded insert	M4 heat-set, brass, OD 5.6 × 8.1	1	1.1
8	Adhesive	Structural epoxy (core–sheets, sleeve, collar)	a/r	–
COMPLETE PADDLE (3D MODEL)				**832 / 785**

NOTES

1. GRIP: 35.5 × 21.5 R3.75 OVER THE WRAP = CIRCUMFERENCE 107.6 (4¼ in). WRAP LENGTH 109.
2. HANDLE 130 INCL. BUTT CAP. BODY 30 × 16 (CF 4 / CORE 8 / CF 4).
3. SLEEVE (2): BOND TO THE HANDLE WITH EPOXY, 0.2 GAP PER SIDE FOR THE ADHESIVE.
4. WRAP (3): REPLACEABLE PU GRIP, SPIRAL FROM THE CAP SKIRT UP TO UNDER THE COLLAR.
5. COLLAR (4): SLIDE OVER THE WRAP END, BOND TO THE SLEEVE; TOP AT y = 129.
6. INSERT (7): HEAT-SET AT ≈250 °C, FLUSH WITH THE CORE BUTT FACE (y = 4), SQUARE WITHIN 1°.
7. SCREW (6): LOW-STRENGTH THREADLOCKER; TIGHTEN UNTIL THE CAP SEATS, MAX 0.8 N·m.
8. BUTT CAP (5): BASE 4 + SKIRT 6 OVER THE SLEEVE; THE BASE COUNTS IN THE 390 OVERALL LENGTH.
9. SAME HANDLE ON PB-EL-001 AND PB-HY-001. ALL DIMENSIONS IN mm.

GRIP AND BUTT-CAP ASSEMBLY

HANDLE 130 × 30 × 16 · GRIP 107.6 (4¼ in) · BOTH PADDLES

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-23		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-GR-001	B	1 / 1	A3	1:1, 2:1	mm

PROJECTION	MATERIAL	STATUS
	SEE BOM	ISSUED FOR REVIEW