



FRONT ELEVATION

scale 1:2 · cards omitted

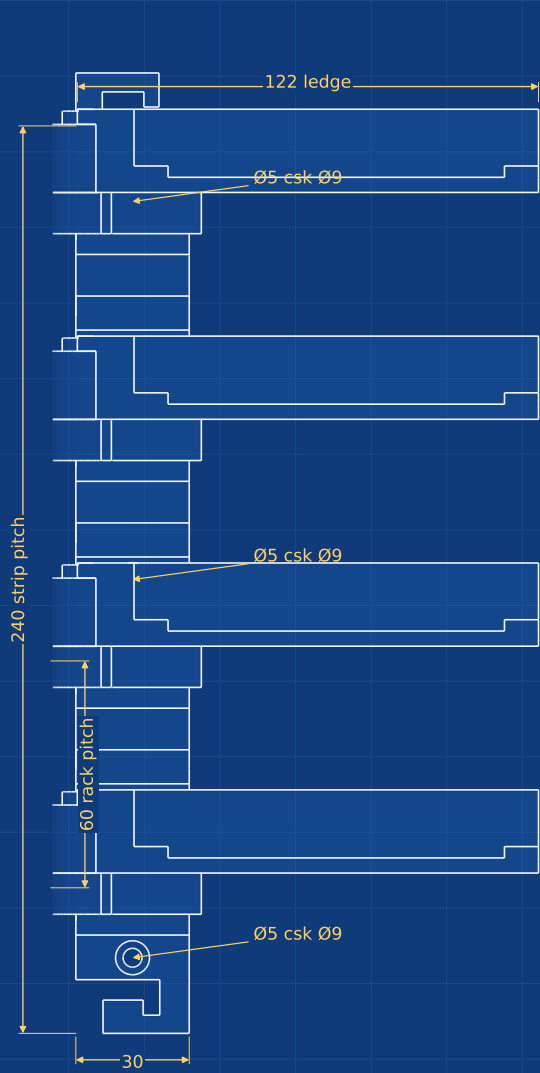


SIDE ELEVATION

scale 1:2 · from the left

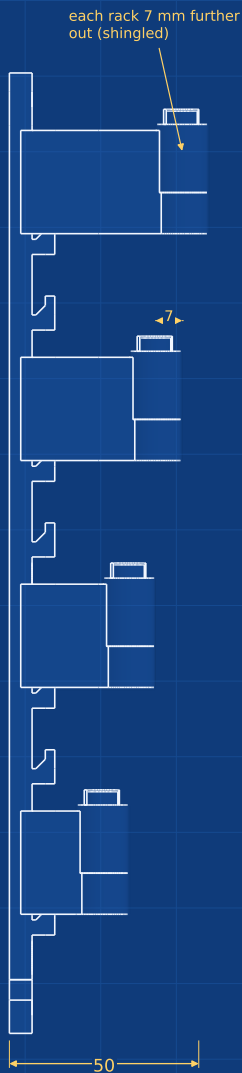


ASSEMBLED · 4 CARDED CARS

isometric · not to scale · every card name stays visible

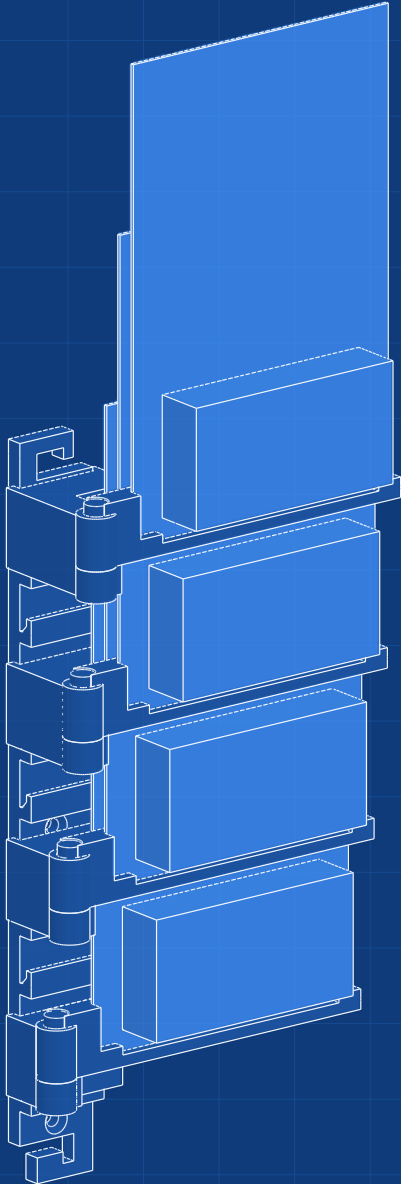

EXPLODED VIEW

isometric · one rack

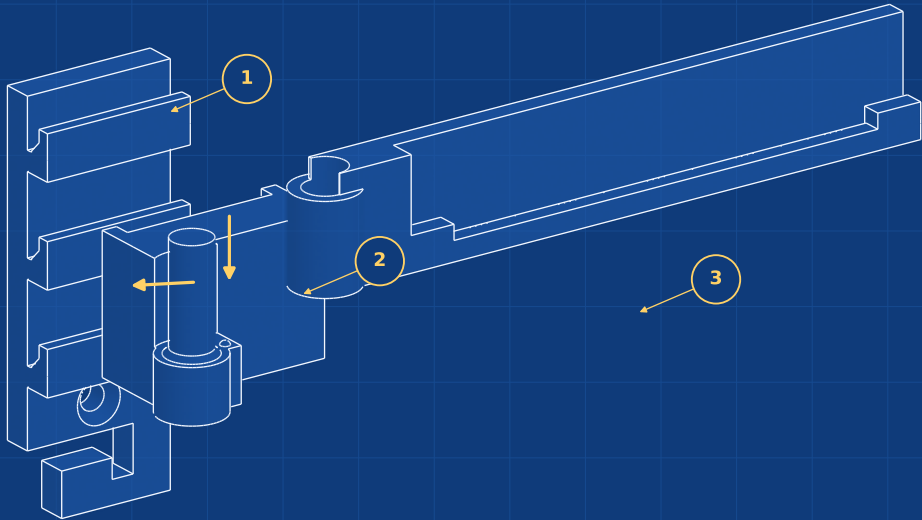


ITEM	PART	QTY (4-car)	PRINT
1	Wall strip 30 x 6 x 254 (hook lips every 20)	1	flat, back down
2	Hinge clip, depth j = 0..3 (one each)	4	standing
3	Ledge 128.6 long, 1.8 mm card slot	4	standing
-	Screw 4-5 mm countersunk + wall plug	3	-

Kits: 2, 3, 4 cars on 1 strip (119 / 179 / 239 mm tall), 5-6 cars on 2 strips.
Strips join with the C-interlock; clips need no tools.

OPERATION SEQUENCE


how the product works

1 SCREW THE STRIP

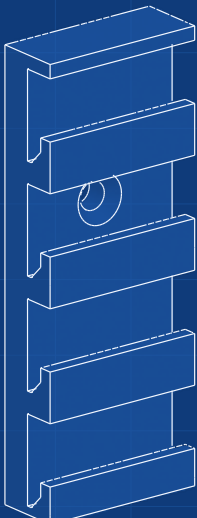


3 countersunk screws; hook lips face up

2 HANG THE CLIP

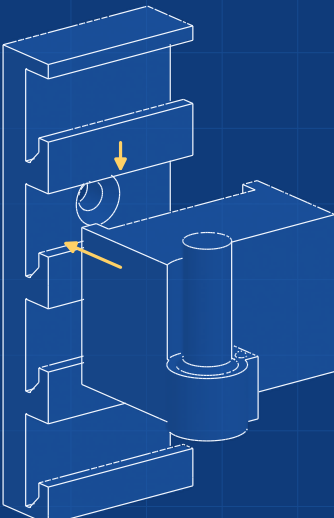


hold 6 mm high, push in, let go: gravity lock

3 DROP THE LEDGE ON THE PIN

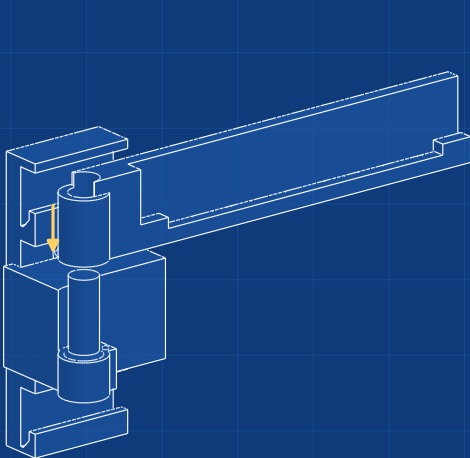

it clicks shut on the detent bump

4 LIFT 1 mm, SWING 10-40°, SLIDE CARD IN



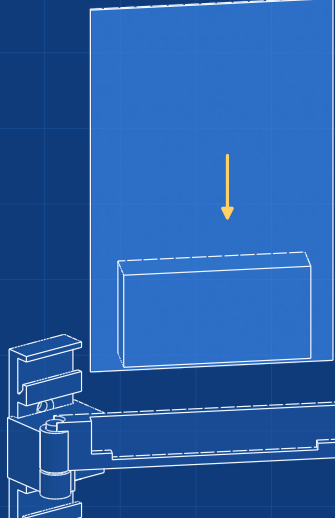


close it: the solid block stops it at 0°

PRODUCT	SWINGRACK hinged wall rack for carded 1:64 die-cast
DRAWING	General arrangement & operation
SOURCE	build_board.py (v3) units: mm
SCALE	as noted (1:2 orthographic, iso NTS)
MATERIAL	PLA / PETG, 0.2 mm layers, no supports
DATE	2026-10-03
SHEET	1 of 2

1 WALL STRIP


front 1:2 · section A-A 1:1 · details 3:1

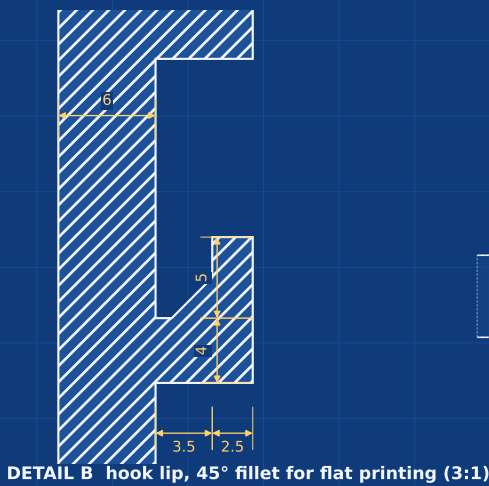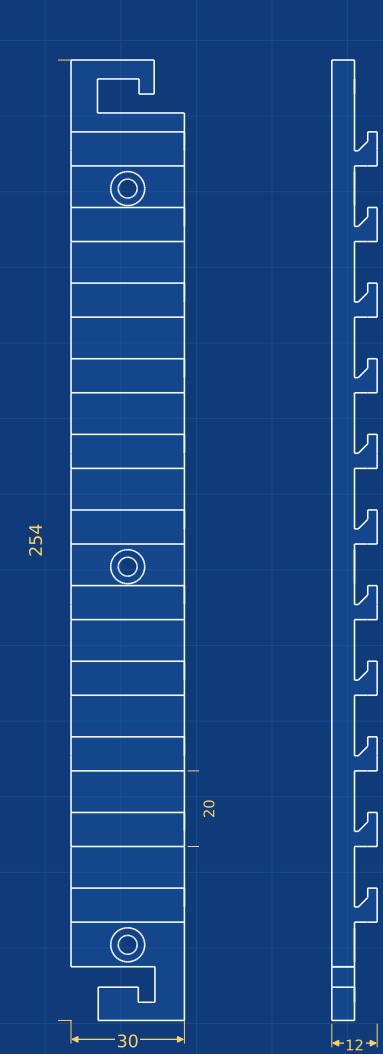

DETAIL C C-interlock, front view (2:1)
full thickness; locks up/down/left/right; press on from the front

2 HINGE CLIP (depth j = 0 shown)

front / side / top 1:1 · iso NTS

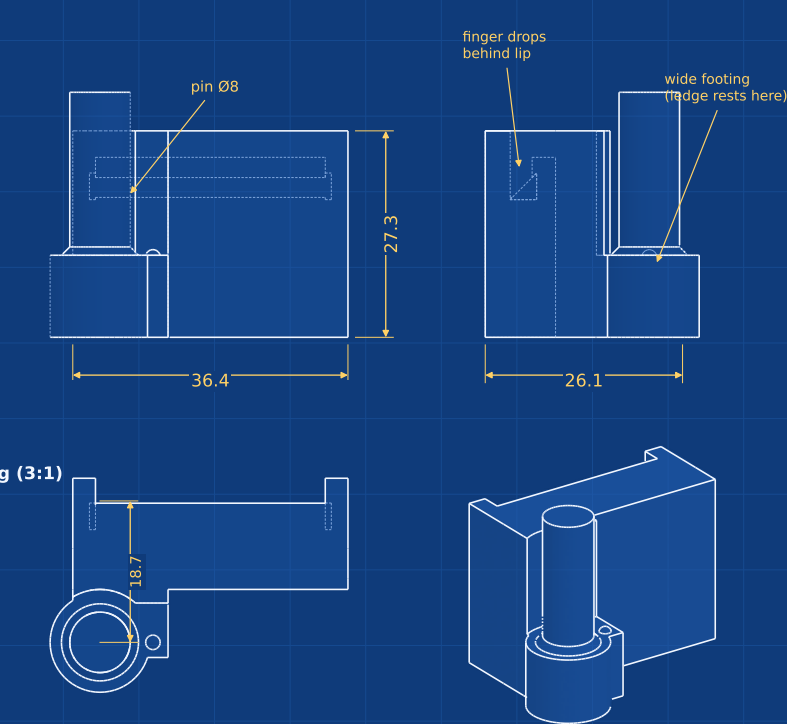


j	pin from strip	block depth
0	18.7	5.4
1	25.7	11.3
2	32.7	11.3
3	39.7	11.3
4	46.7	11.3
5	53.7	11.3

Clip j sits 7 mm deeper per rack.
Hang: lift 5.3 mm over the lip.
Cheeks: 0.2 mm each side of strip.
Pin-to-barrel clearance 0.2 mm.
Nothing right of pin + 9 mm in the card lane (cards start at 15).

3 LEDGE


top 1:1 · front 1:1 · section D-D 3:1 · iso NTS

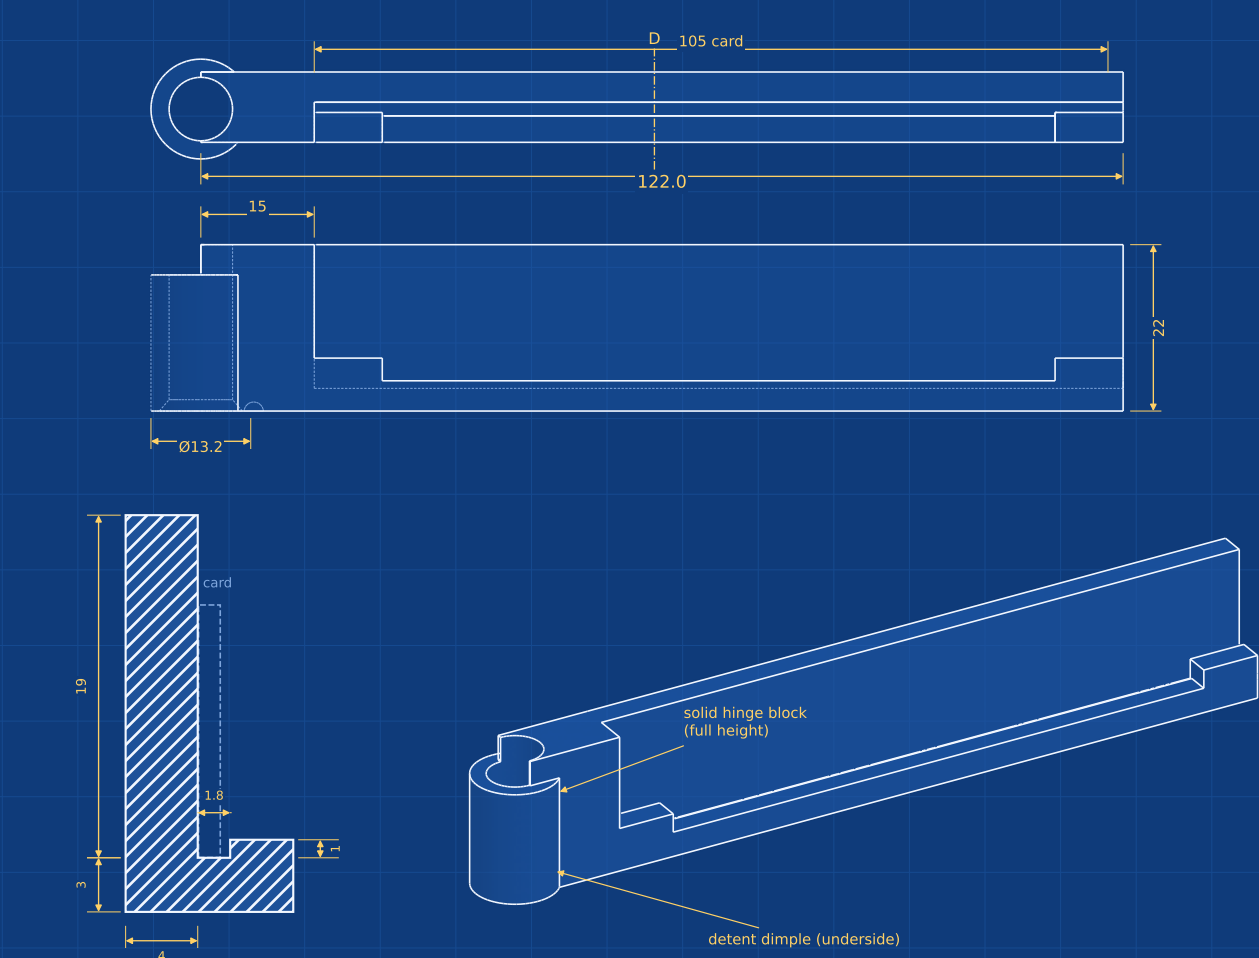

SECTION D-D (3:1)
tall back wall 19, front lip 1, corner pads 4

HINGE FUNCTION

section through the pin axis, 2:1 · ledge closed / lifted & opening

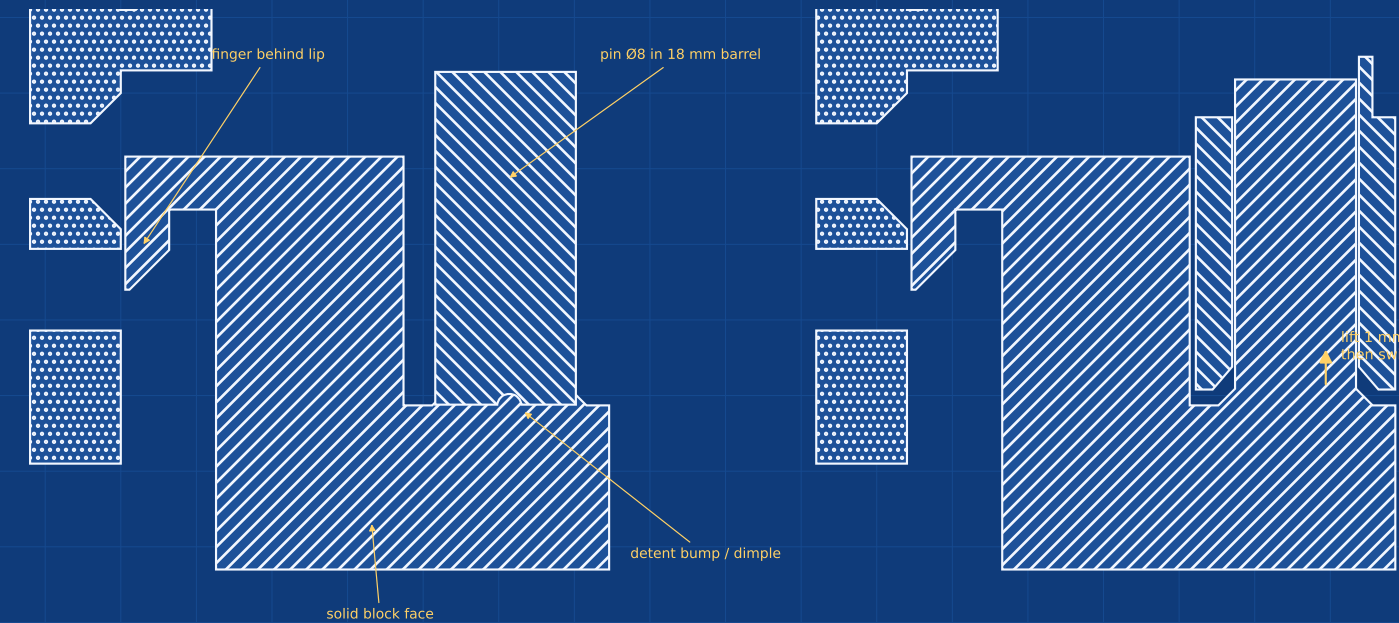

NOTES

- Card: ~105 x 165 mm, 1.2 mm thick, blister up to 42 mm. Slot 1.8 mm.
- Clip hangs by gravity: finger behind a full-width hook lip; cheeks stop twisting.
- Ledge rests on the wide footing; the solid block stops it at 0°, bump holds it closed.
- To load: open the ledges above, lift 1 mm, swing 10-40°, slide card down.
- No supports: strip flat (back down), clip & ledge standing.
- Fit verified on the CAD model by boolean collision checks (hang, lift-off, swing, stop, card loading, strip joint). Print tolerances may need tuning.

PRODUCT	SWINGRACK hinged wall rack for carded 1:64 die-cast
DRAWING	Part details
SOURCE	build_board.py (v3) units: mm
SCALE	as noted on each view
MATERIAL	PLA / PETG, 0.2 mm layers, no supports
DATE	2026-10-03
SHEET	2 of 2