

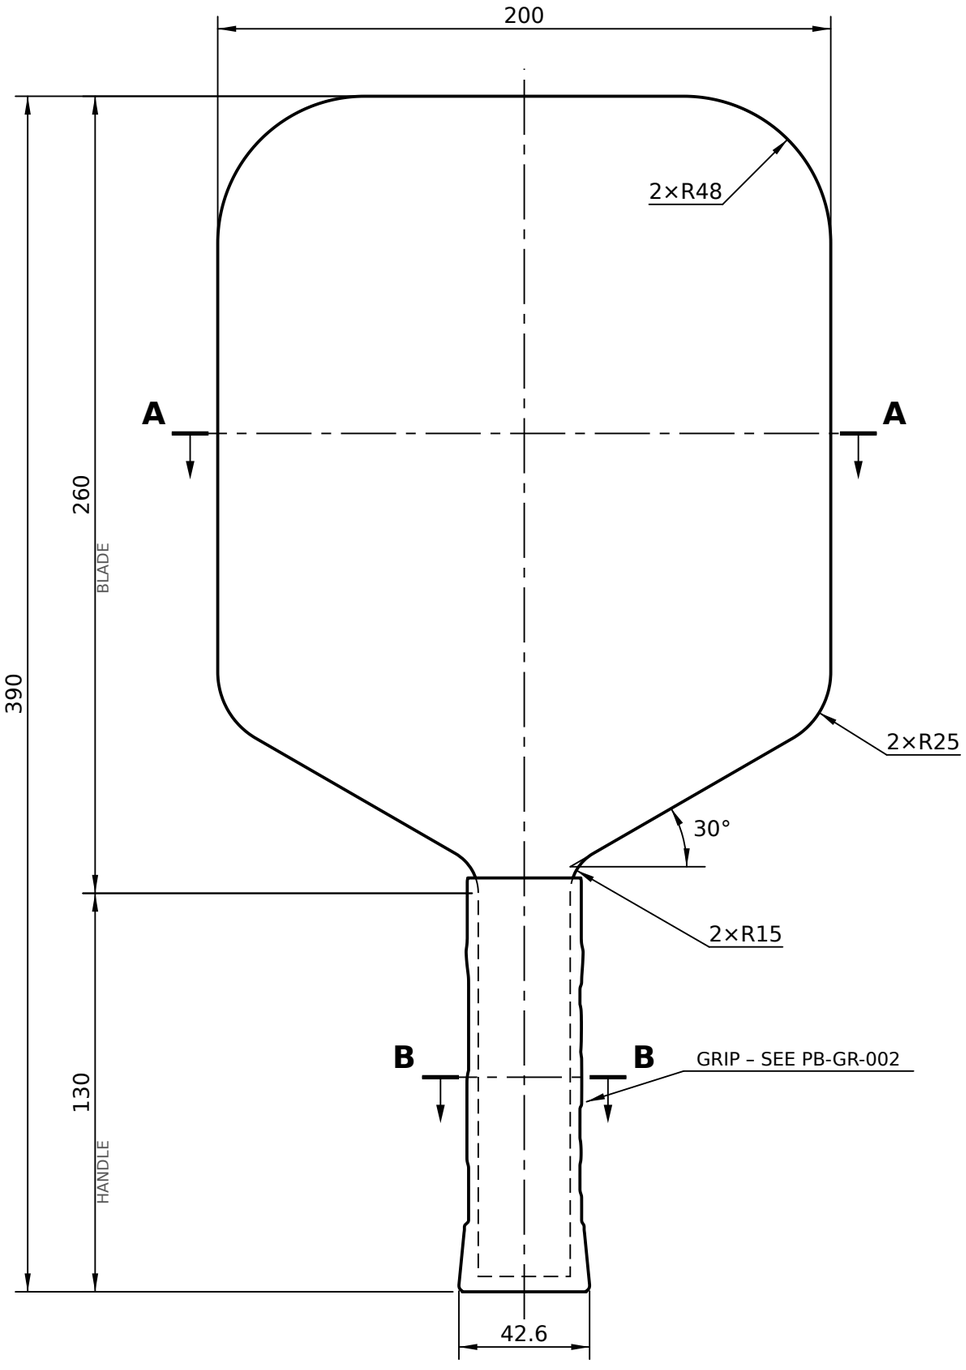


FRONT VIEW




SIDE VIEW

LAY-UP 0.3/10/0.3

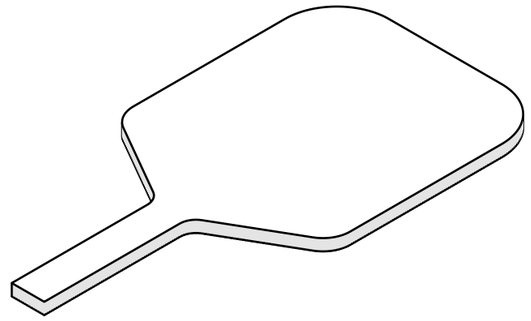


ISOMETRIC VIEW

SCALE 1:4 (BODY ONLY)

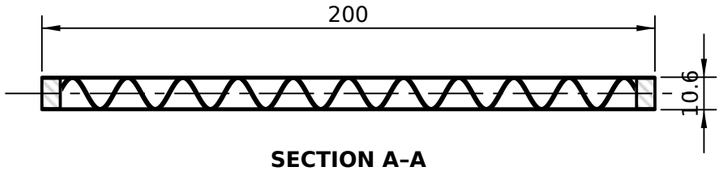

SECTION A–A

SCALE 1:2 · CF 0.3 / WAVE-RIB CORE 10 / CF 0.3 · CORE DETAIL: SHEET 3



SECTION B–B

SCALE 1:1 · REV-8 GRIP, SLOT 16: PB-GR-002

NOTES

1. ALL DIMENSIONS IN MILLIMETRES. DO NOT SCALE THE DRAWING. UNLESS STATED: LINEAR ±0.5, ANGULAR ±0.5°.
2. PROFILE SYMMETRICAL ABOUT THE CENTRE LINE. ALL ARCS TANGENT TO ADJOINING EDGES.
3. SANDWICH: CF FACE SHEET 0.3 + WAVE-RIB CORE 10 + CF FACE SHEET 0.3 = 10.6 ±0.2, UNIFORM OVER BLADE AND HANDLE. BODY (SHEETS + CORE) FROM y = 5 TO THE TIP; GRIP BASE y = 0 … 5.
4. FACE SHEETS (2 OFF, IDENTICAL): WOVEN CARBON/EPOXY 0.3 THK (CURED), CUT TO PB-EL-001_profile.dxf (TEMPLATE: SHEET 2), TRIMMED FLUSH WITH THE CORE EDGE.
5. RIB SUPPORT (CORE): CARBON FIBRE MOULDED IN ONE PIECE IN THE TWO-HALF WAVE MOULD (SHEET 4), CLOSED FRAME 6, WAVE RIB λ18 / WALL 1.6 / LANDS 4.28, SOLID TO y = 150, 45° FLUTE RAMPS – SEE SHEET 3.
6. SKINS BONDED TO THE CORE: EPOXY, ABRADED + PRIMED FACES, PRESSED FLAT BETWEEN PLATENS OR IN A VACUUM BAG.
7. STRENGTH: NOT QUALIFIED BY FEA. HAND CHECK (analysis/hand_check.json, README): THE 0.3 SKINS FAIL A TIP HIT (SKIN BUCKLING BETWEEN THE LANDS, HANDLE SKIN, CORE); 0.6 SKINS PASS.
8. GRIP: PRINTED PLA GRIP (ANY OF THE TEN REV-8 DESIGNS; DRAWN: CARBON MATRIX, 61 g), LOCKED BY A DIN 7984 M3 × 12 SCREW INTO A BONDED M3 INSERT. REV-8 SLOT 16 > HANDLE 10.6: REGENERATE – PB-GR-002.
9. USA PICKLEBALL LIMITS: L + W = 590 ≤ 609.6 (24 in), L = 390 ≤ 431.8 (17 in), INCL. GRIP. AN EDGE GUARD COUNTS TOWARDS THESE LIMITS (MARGIN 19.6).
10. MASS 379 g WITH THE GRIP, BALANCE POINT 202 FROM THE BUTT (FROM THE 3D MODEL).


PICKLEBALL PADDLE – ELONGATED

GENERAL ARRANGEMENT · 390 × 200 × 10.6 mm · CF / WAVE-RIB SANDWICH

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-25		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	E	1 / 4	A3	1:2	mm

PROJECTION	MATERIAL	STATUS
	SEE NOTES	ISSUED FOR REVIEW

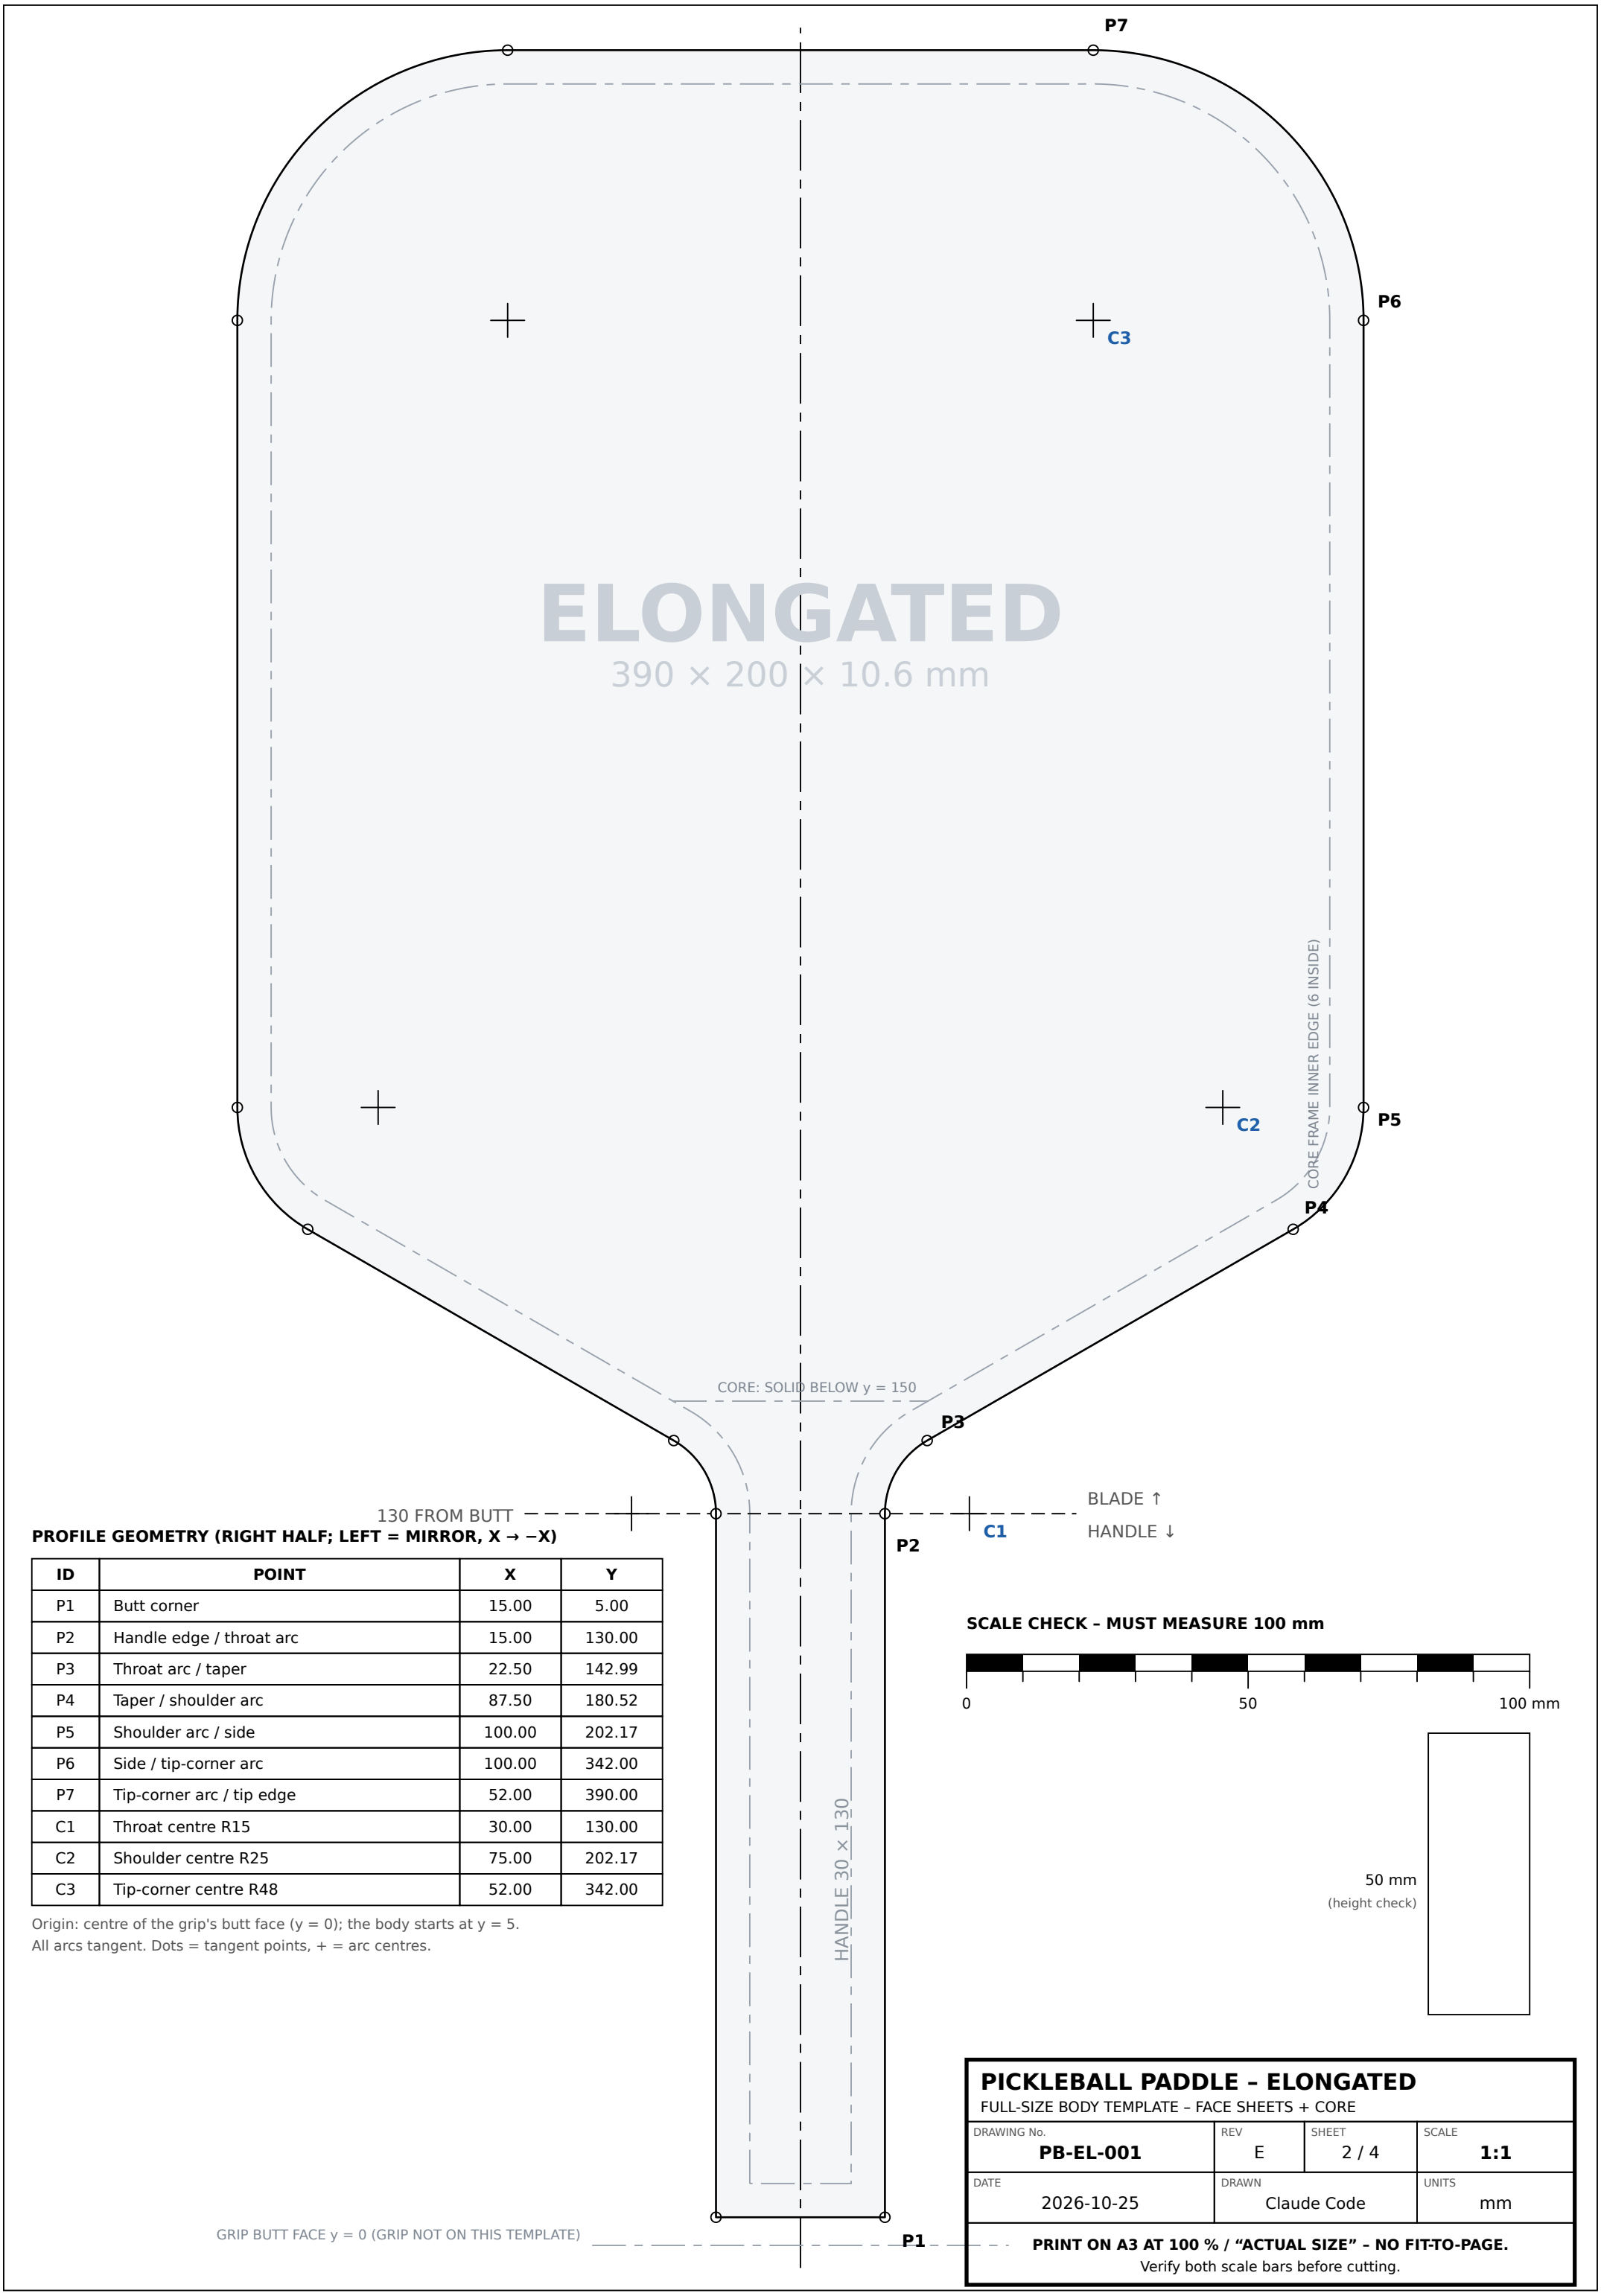

PROFILE GEOMETRY (RIGHT HALF; LEFT = MIRROR, X → −X)

ID	POINT	X	Y
P1	Butt corner	15.00	5.00
P2	Handle edge / throat arc	15.00	130.00
P3	Throat arc / taper	22.50	142.99
P4	Taper / shoulder arc	87.50	180.52
P5	Shoulder arc / side	100.00	202.17
P6	Side / tip-corner arc	100.00	342.00
P7	Tip-corner arc / tip edge	52.00	390.00
C1	Throat centre R15	30.00	130.00
C2	Shoulder centre R25	75.00	202.17
C3	Tip-corner centre R48	52.00	342.00

Origin: centre of the grip's butt face (y = 0); the body starts at y = 5.
All arcs tangent. Dots = tangent points, + = arc centres.

SCALE CHECK – MUST MEASURE 100 mm

0 50 100 mm

50 mm
(height check)


PICKLEBALL PADDLE – ELONGATED

FULL-SIZE BODY TEMPLATE – FACE SHEETS + CORE

DRAWING No.	REV	SHEET	SCALE
PB-EL-001	E	2 / 4	**1:1**


DATE	DRAWN	UNITS
2026-10-25	Claude Code	mm

PRINT ON A3 AT 100 % / “ACTUAL SIZE” – NO FIT-TO-PAGE.
Verify both scale bars before cutting.

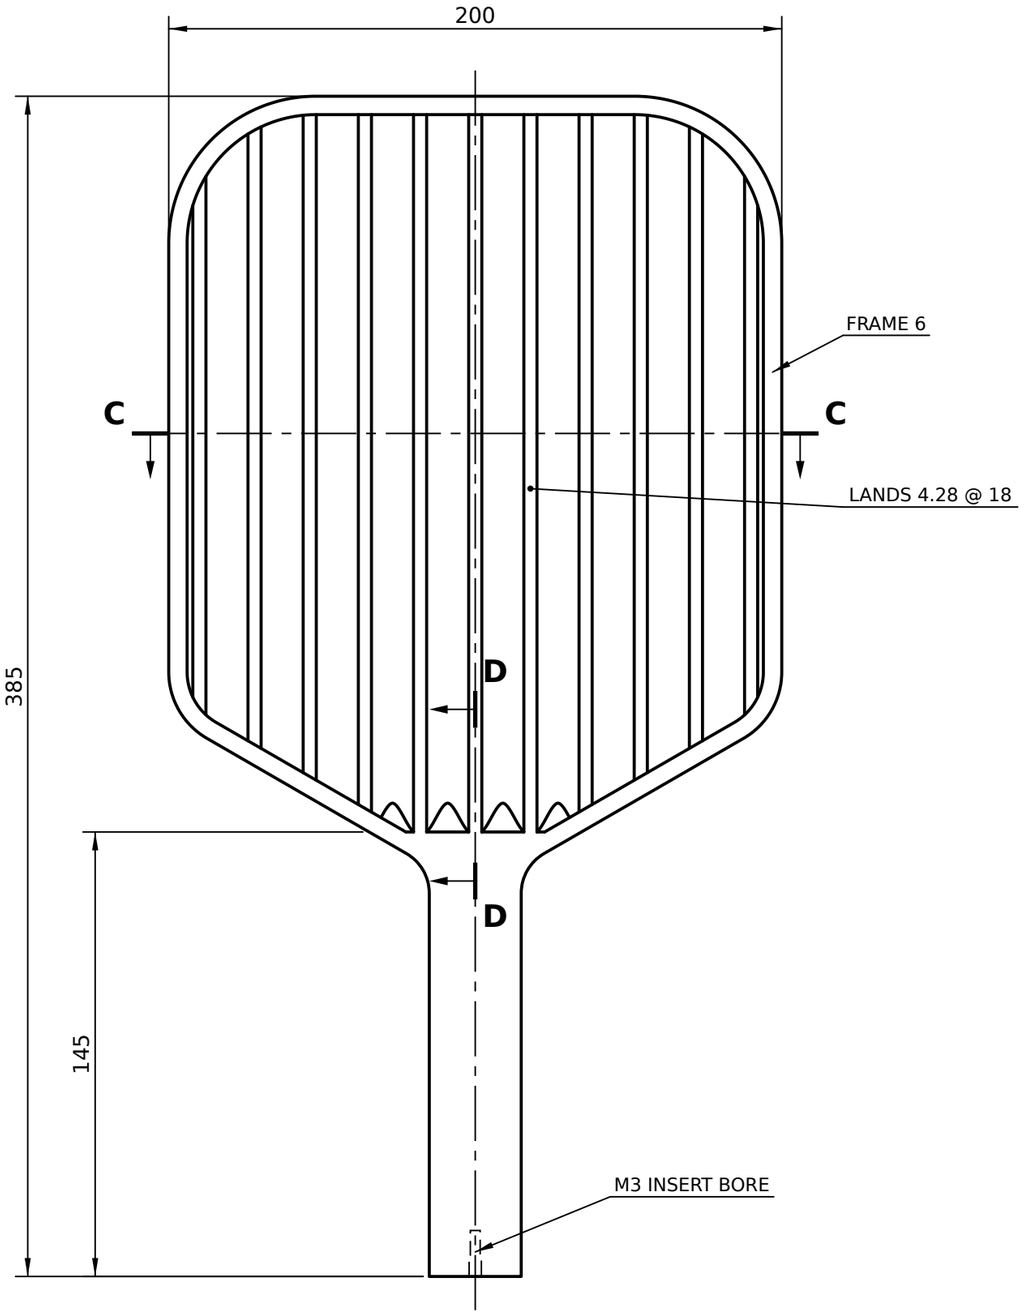


PLAN VIEW (TOP FACE)

SCALE 1:2 · BOTTOM LANDS OFFSET ½ PITCH

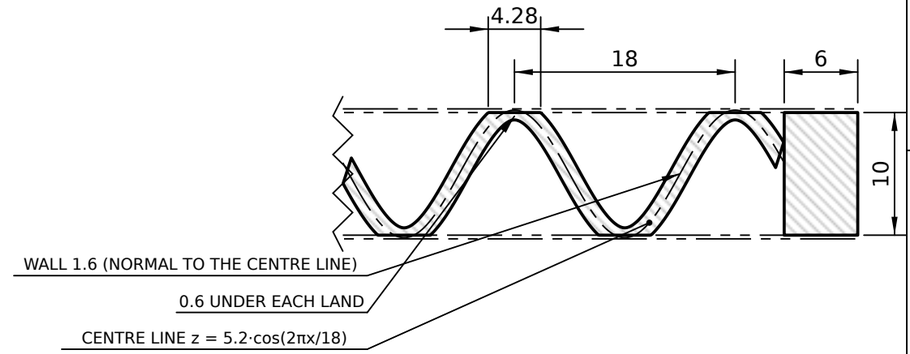

SECTION C–C (PART)

SCALE 2:1 · FACE SHEETS SHOWN PHANTOM

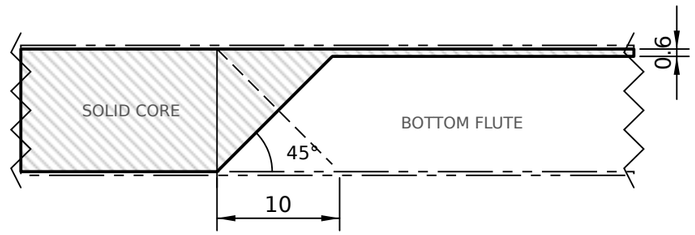

SECTION D–D (PART)

SCALE 2:1 · ON THE CENTRE LAND (x = 0), RAMP FROM y = 150; TOP FLUTES MIRROR IT

NOTES

1. MATERIAL: CARBON FIBRE / EPOXY, MOULDED IN ONE PIECE IN THE SHEET-4 MOULD (CHOPPED FIBRE 10–25 LONG, ≈ 40 % BY VOLUME, ρ ≈ 1.5 g/cm³). THE PRINTED STL (NOTE 8) IS A TRIAL PIECE / PRINTED ALTERNATIVE.
2. THICKNESS 10, SET BY THE LID SEATING ON THE TRAY RIM. BOTH FACES ARE BOND SURFACES.
3. WAVE RIB λ18, WALL 1.6, CENTRE-LINE AMPLITUDE 5.2; CRESTS CUT FLAT = LANDS 4.28 ON BOTH FACES.
4. FRAME 6, CLOSED. SOLID TO y = 150; EACH FLUTE ENDS IN A 45° RAMP, 10 LONG, LONGEST AT ITS OPEN FACE (D–D), SO THE MOULD TEETH PULL STRAIGHT OUT.
5. AFTER MOULDING DRILL Ø4 × 7 + Ø3.2 × 15 IN THE BUTT FACE AND BOND AN M3 BRASS INSERT (EPOXY) FOR THE GRIP SCREW – SEE PB-GR-002.
6. BONDING THE SKINS: ABRADE (P120) AND DEGREASE BOTH FACES, EPOXY, PRESS FLAT BETWEEN PLATENS OR IN A VACUUM BAG.
7. PRINT FILE output/rib_support/elongated_rib_support.stl (TRIAL PIECE: CHECKS THE MOULD CLOSES): FLAT, BED ≥ 391 × 206.
8. MASS 270 g. y FROM THE GRIP BUTT FACE (y = 0); THE RIB SUPPORT STARTS AT y = 5.


RIB SUPPORT – ELONGATED

RIB SUPPORT (CORE) · MOULDED CARBON, ONE PIECE · 385 × 200 × 10 mm

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-25		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	E	3 / 4	A3	1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	CARBON / EPOXY (NOTE 1)	ISSUED FOR REVIEW

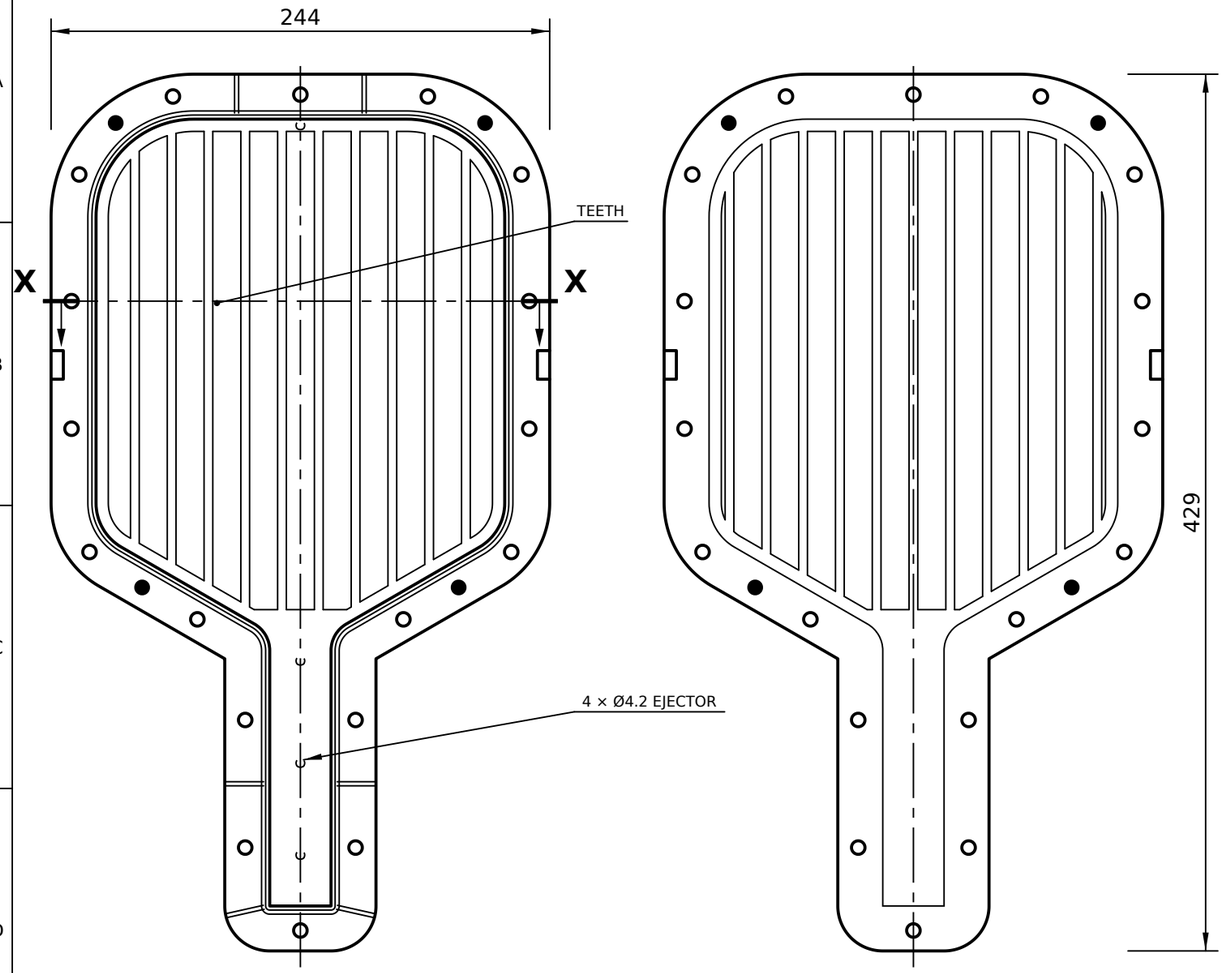


TRAY (BOTTOM HALF)

SCALE 1:3 · TEETH = BOTTOM FLUTES


LID, UNDERSIDE

SCALE 1:3 · TEETH = TOP FLUTES



SECTION X–X

SCALE 1:2 · CLOSED MOULD, MOULDED RIB SUPPORT BLACK, M6 BOLT

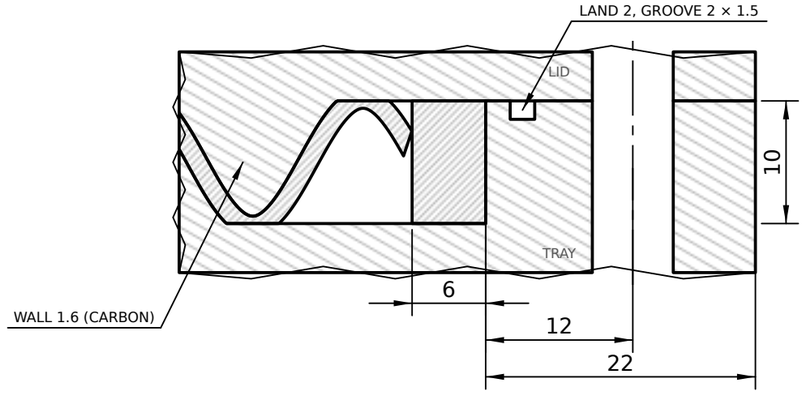

DETAIL Y

SCALE 2:1 · TEETH INTERLOCK; THE GAPS ARE THE WALLS AND THE FRAME

NOTES

1. TRAY (1) + LID (2): output/mould/elongated_mould_bottom / _top (.stl / .step). THE CAVITY BETWEEN THEM IS THE RIB SUPPORT (SHEET 3); THE TEETH ARE ITS FLUTES. THE LID SEATS ON THE TRAY RIM: CORE HEIGHT 10, WALLS 1.6.
2. PRINT BOTH BACK DOWN, TEETH UP: ≥ 5 WALLS, ≥ 40 % INFILL, 0.12–0.16 LAYERS FOR THE TEETH, IRONING ON FLAT TOPS. NEEDS A ≥ 440 mm BED, OR MACHINE THE STEP FROM ALUMINIUM. ABOUT 1.4 + 1.1 kg OF PLA AT 100 %.
3. PLA SOFTENS NEAR 55 °C: ROOM-TEMPERATURE-CURE EPOXY ONLY. FOR A WARM CURE PRINT IN PETG, ASA OR PA-CF.
4. PREPARE: SAND THE CAVITY FACES (P400 → P800), SEAL (EPOXY COAT), WAX ×3 + PVA. PRESS THE 4 DOWEL PINS (4) INTO THE TRAY. PLUG THE EJECTOR HOLES FROM BELOW WITH TAPE.
5. FILL (FORGED CARBON): CHOP CARBON TOW TO 10–25 mm, WET IT WITH EPOXY (≈ 40 % FIBRE BY VOLUME). PACK THE WALL GAPS AND THE FRAME FIRST, THEN THE SOLID HANDLE ZONE; OVERFILL BY ≈ 10 %.
6. CLOSE: LID OVER THE DOWELS, BOLTS (3) FINGER-TIGHT, THEN PRESS BETWEEN 2 FLAT, STIFF PLATENS OR IN A PRESS UNTIL THE LID SEATS ON THE RIM; TIGHTEN THE BOLTS. EXCESS RESIN LEAVES BY THE OVERFLOW GROOVE AND THE VENTS.
7. CURE (24 h AT ROOM TEMPERATURE), SPLIT AT THE PRY NOTCHES, LIFT THE LID STRAIGHT UP, PUSH THE PART OUT WITH THE 4 EJECTOR PINS. TRIM THE FLASH, DRILL AND FIT THE M3 INSERT (SHEET 3). THE PART WEIGHS ≈ 271 g.
8. TRIAL FIRST: PRINT THE RIB SUPPORT STL IN PLA AND CLOSE THE EMPTY MOULD ON IT – IT MUST SEAT FULLY.

MOULD HARDWARE

ITEM	PART	QTY
1	Tray, elongated_mould_bottom.stl	1
2	Lid, elongated_mould_top.stl	1
3	Hex bolt M6 × 50, 2 washers, nut	18
4	Dowel pin Ø6 × 16, steel (ISO 2338)	4
5	Ejector pin Ø4 × 40 (or a drill shank)	4
6	Release wax + PVA; flat platens + clamps or a press	a/r


RIB SUPPORT MOULD – ELONGATED

RIB SUPPORT MOULD · TRAY + LID, TEETH INTERLOCK · 244 × 429 mm


DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-25		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	E	4 / 4	A3	1:3, 1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	PLA / PETG (NOTE 2)	ISSUED FOR REVIEW

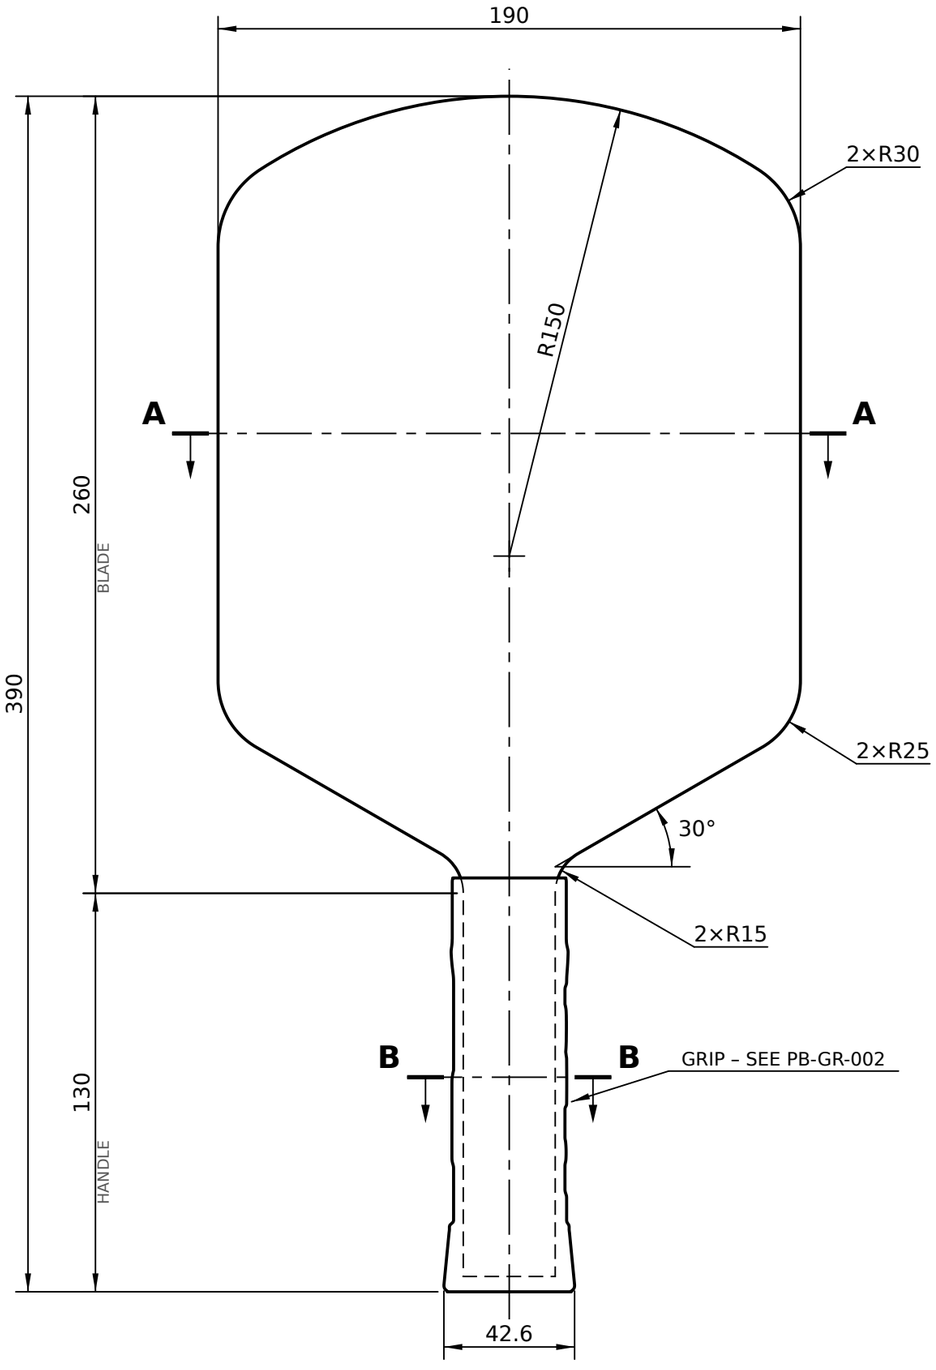


FRONT VIEW

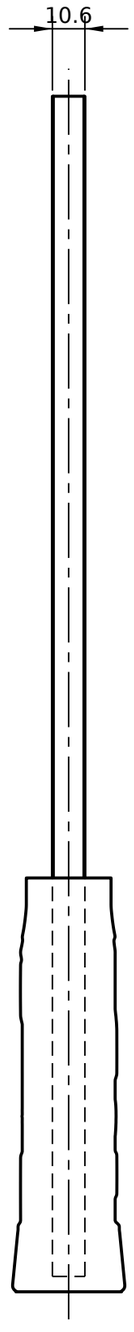


SIDE VIEW

LAY-UP 0.3/10/0.3

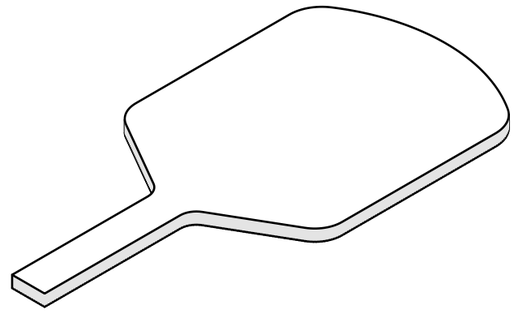


ISOMETRIC VIEW

SCALE 1:4 (BODY ONLY)

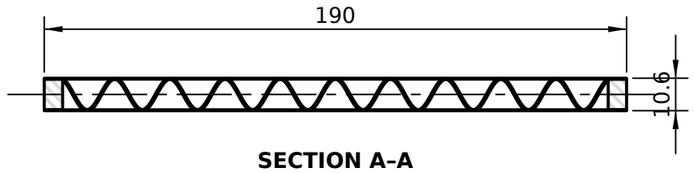

SECTION A–A

SCALE 1:2 · CF 0.3 / WAVE-RIB CORE 10 / CF 0.3 · CORE DETAIL: SHEET 3

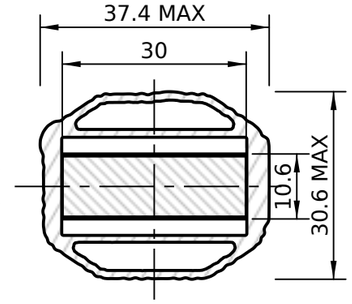

SECTION B–B

SCALE 1:1 · REV-8 GRIP, SLOT 16: PB-GR-002

NOTES

1. ALL DIMENSIONS IN MILLIMETRES. DO NOT SCALE THE DRAWING. UNLESS STATED: LINEAR ±0.5, ANGULAR ±0.5°.
2. PROFILE SYMMETRICAL ABOUT THE CENTRE LINE. ALL ARCS TANGENT TO ADJOINING EDGES.
3. SANDWICH: CF FACE SHEET 0.3 + WAVE-RIB CORE 10 + CF FACE SHEET 0.3 = 10.6 ±0.2, UNIFORM OVER BLADE AND HANDLE. BODY (SHEETS + CORE) FROM y = 5 TO THE TIP; GRIP BASE y = 0 … 5.
4. FACE SHEETS (2 OFF, IDENTICAL): WOVEN CARBON/EPOXY 0.3 THK (CURED), CUT TO PB-HY-001_profile.dxf (TEMPLATE: SHEET 2), TRIMMED FLUSH WITH THE CORE EDGE.
5. RIB SUPPORT (CORE): CARBON FIBRE MOULDED IN ONE PIECE IN THE TWO-HALF WAVE MOULD (SHEET 4), CLOSED FRAME 6, WAVE RIB λ18 / WALL 1.6 / LANDS 4.28, SOLID TO y = 150, 45° FLUTE RAMPS – SEE SHEET 3.
6. SKINS BONDED TO THE CORE: EPOXY, ABRADED + PRIMED FACES, PRESSED FLAT BETWEEN PLATENS OR IN A VACUUM BAG.
7. STRENGTH: NOT QUALIFIED BY FEA. HAND CHECK (analysis/hand_check.json, README): THE 0.3 SKINS FAIL A TIP HIT (SKIN BUCKLING BETWEEN THE LANDS, HANDLE SKIN, CORE); 0.6 SKINS PASS.
8. GRIP: PRINTED PLA GRIP (ANY OF THE TEN REV-8 DESIGNS; DRAWN: CARBON MATRIX, 61 g), LOCKED BY A DIN 7984 M3 × 12 SCREW INTO A BONDED M3 INSERT. REV-8 SLOT 16 > HANDLE 10.6: REGENERATE – PB-GR-002.
9. USA PICKLEBALL LIMITS: L + W = 580 ≤ 609.6 (24 in), L = 390 ≤ 431.8 (17 in), INCL. GRIP. AN EDGE GUARD COUNTS TOWARDS THESE LIMITS (MARGIN 29.6).
10. MASS 362 g WITH THE GRIP, BALANCE POINT 196 FROM THE BUTT (FROM THE 3D MODEL).


PICKLEBALL PADDLE – HYBRID

GENERAL ARRANGEMENT · 390 × 190 × 10.6 mm · CF / WAVE-RIB SANDWICH

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-25		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-HY-001	E	1 / 4	A3	1:2	mm

PROJECTION	MATERIAL	STATUS
	SEE NOTES	ISSUED FOR REVIEW

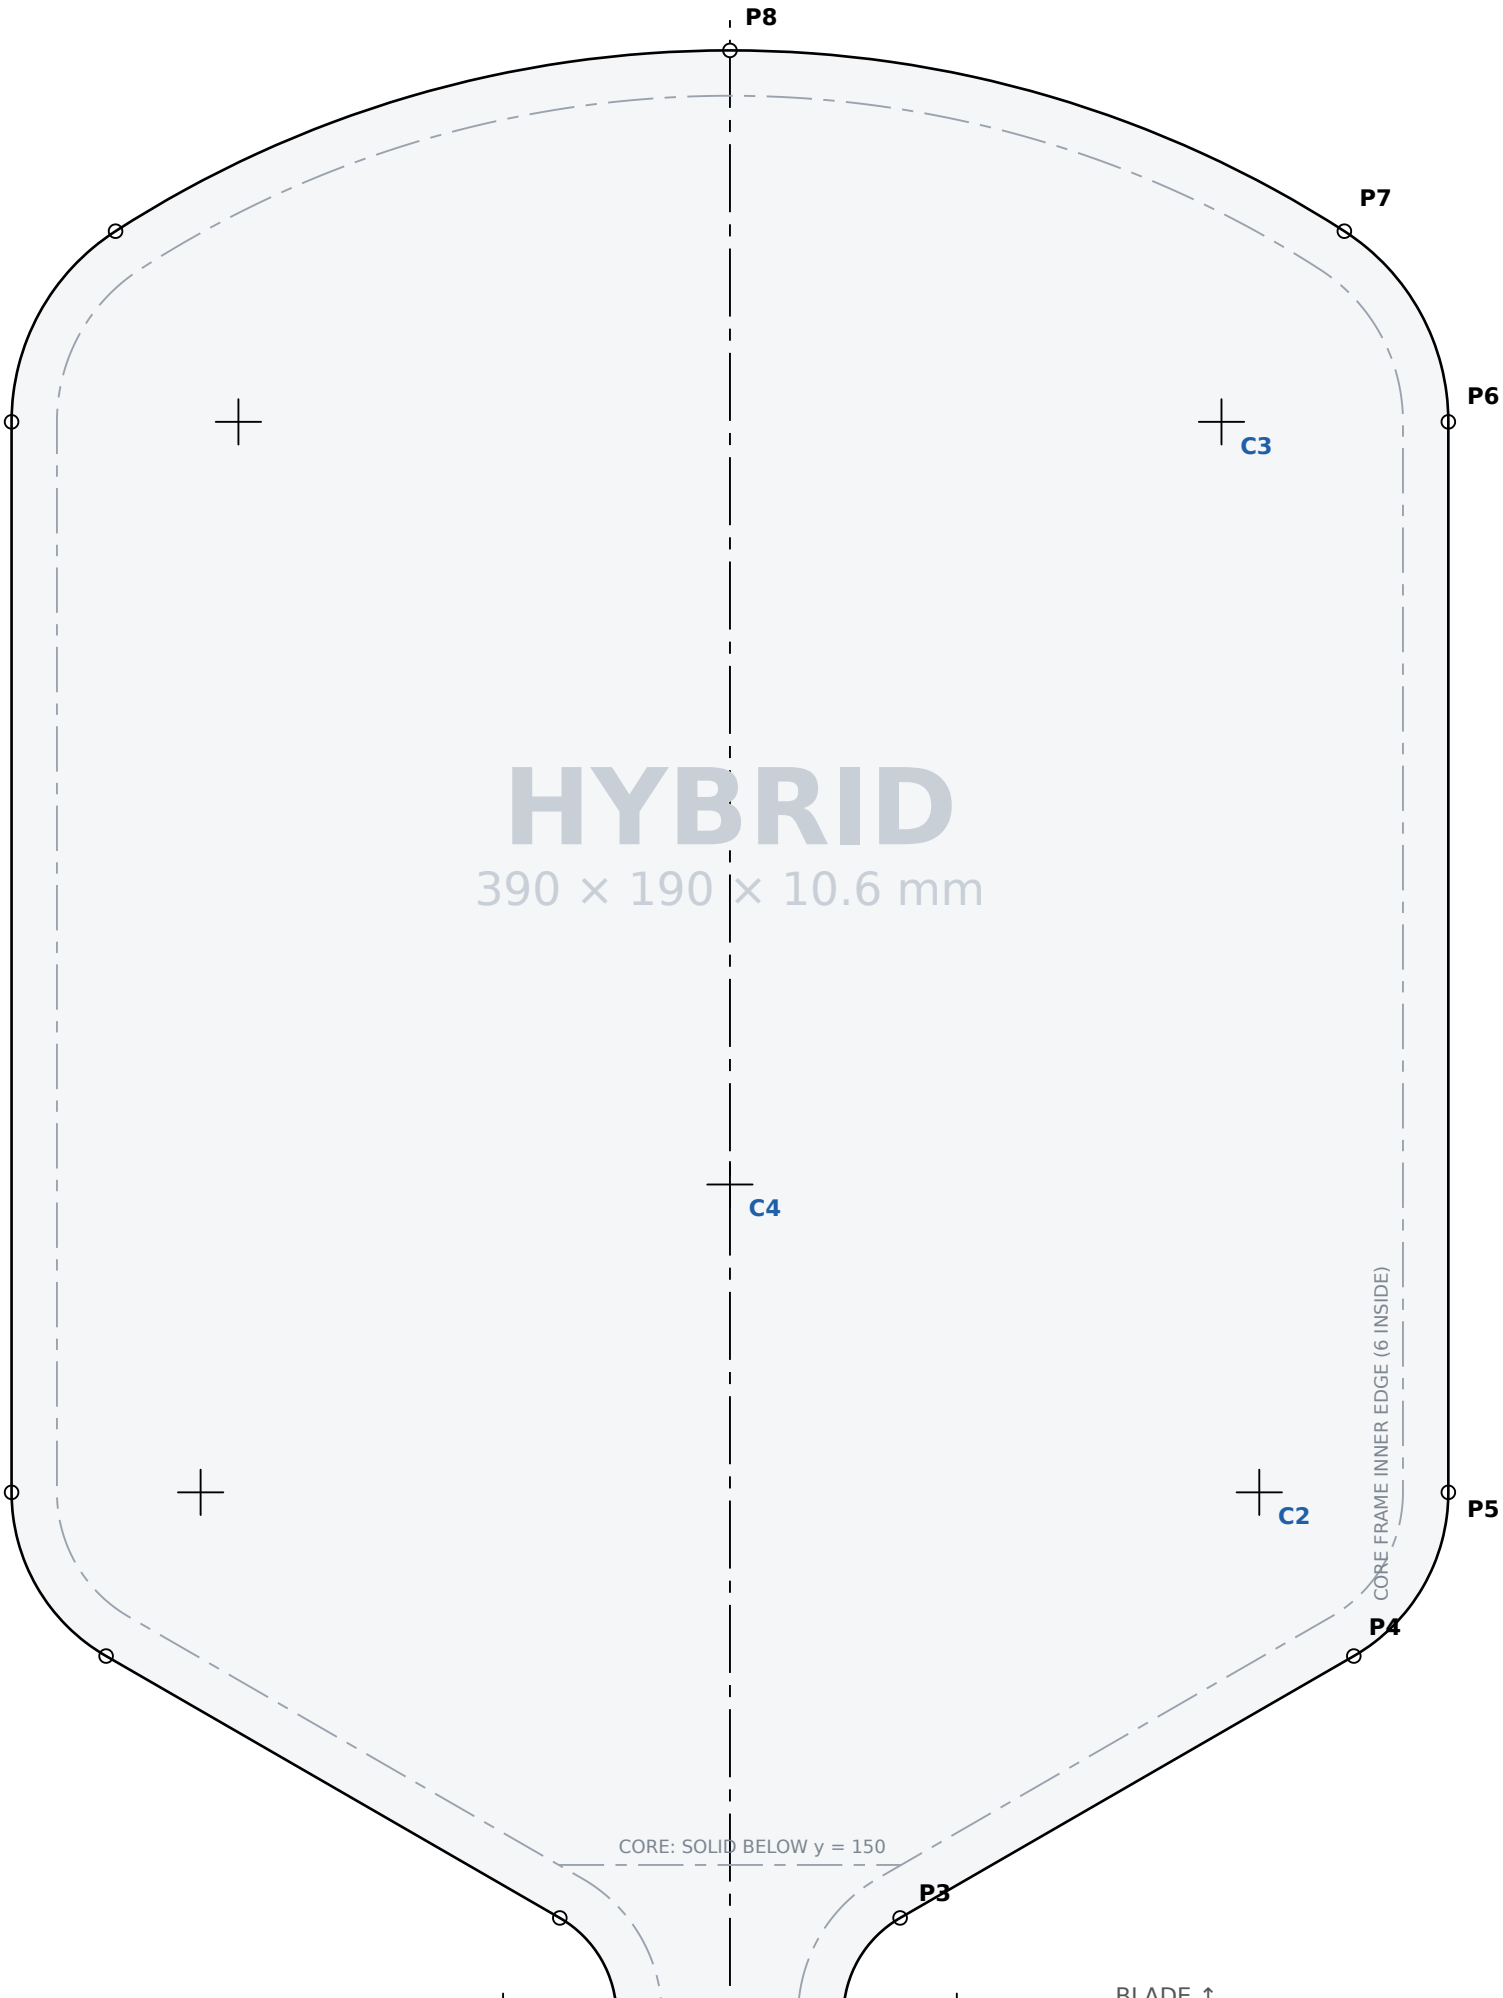



PROFILE GEOMETRY (RIGHT HALF; LEFT = MIRROR, X → −X)

ID	POINT	X	Y
P1	Butt corner	15.00	5.00
P2	Handle edge / throat arc	15.00	130.00
P3	Throat arc / taper	22.50	142.99
P4	Taper / shoulder arc	82.50	177.63
P5	Shoulder arc / side	95.00	199.28
P6	Side / crown-shoulder arc	95.00	340.87
P7	Crown shoulder / dome	81.25	366.09
P8	Apex (on centre line)	0.00	390.00
C1	Throat centre R15	30.00	130.00
C2	Shoulder centre R25	70.00	199.28
C3	Crown-shoulder centre R30	65.00	340.87
C4	Dome centre R150	0.00	240.00

Origin: centre of the grip's butt face (y = 0); the body starts at y = 5.
All arcs tangent. Dots = tangent points, + = arc centres.

SCALE CHECK – MUST MEASURE 100 mm



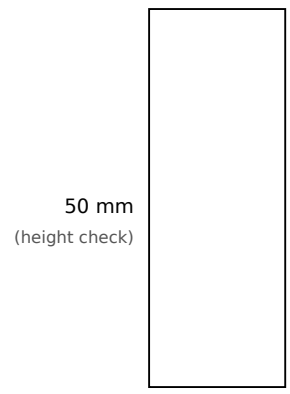


PICKLEBALL PADDLE – HYBRID

FULL-SIZE BODY TEMPLATE – FACE SHEETS + CORE


DRAWING No.	REV	SHEET	SCALE
PB-HY-001	E	2 / 4	**1:1**
DATE	DRAWN		UNITS
2026-10-25	Claude Code		mm

PRINT ON A3 AT 100 % / “ACTUAL SIZE” – NO FIT-TO-PAGE.
Verify both scale bars before cutting.

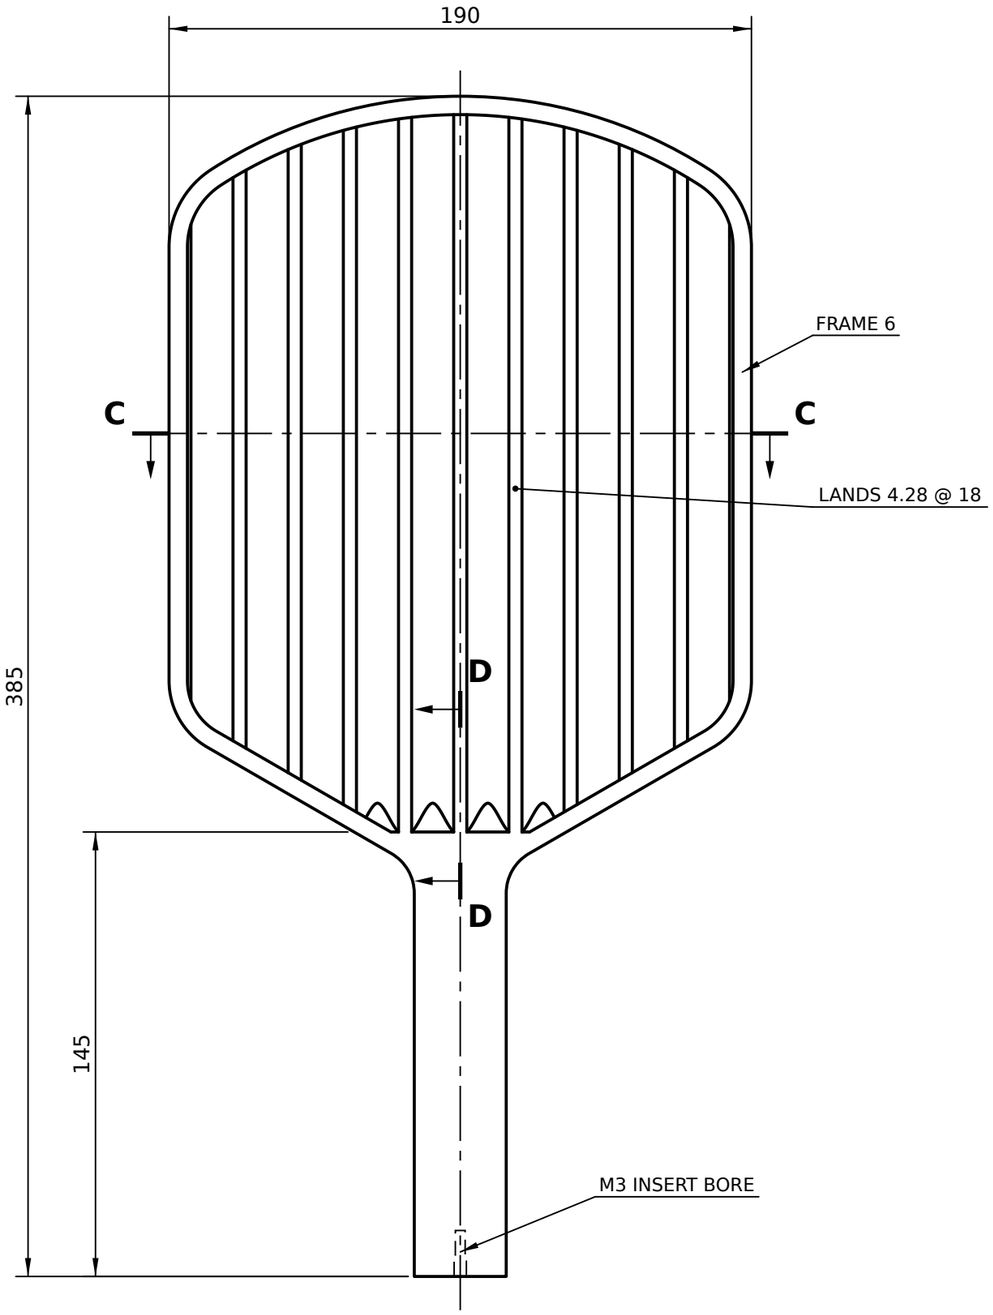


PLAN VIEW (TOP FACE)

SCALE 1:2 · BOTTOM LANDS OFFSET ½ PITCH

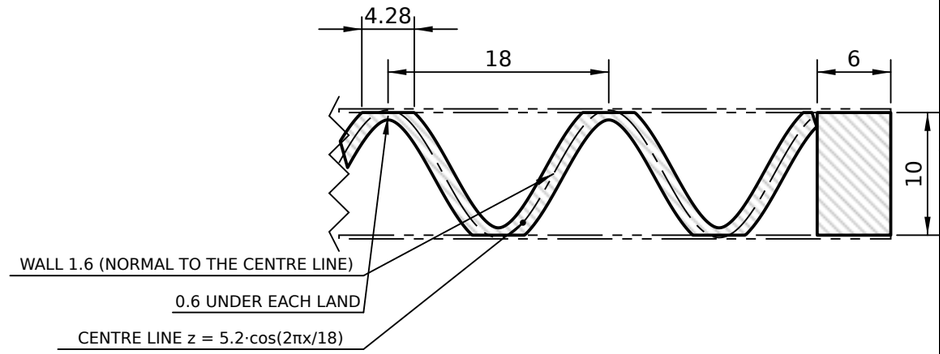

SECTION C–C (PART)

SCALE 2:1 · FACE SHEETS SHOWN PHANTOM

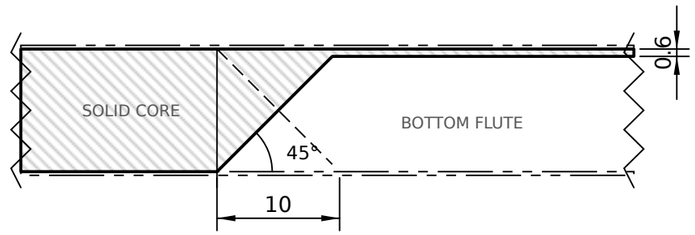

SECTION D–D (PART)

SCALE 2:1 · ON THE CENTRE LAND (x = 0), RAMP FROM y = 150; TOP FLUTES MIRROR IT

NOTES

1. MATERIAL: CARBON FIBRE / EPOXY, MOULDED IN ONE PIECE IN THE SHEET-4 MOULD (CHOPPED FIBRE 10–25 LONG, ≈ 40 % BY VOLUME, ρ ≈ 1.5 g/cm³). THE PRINTED STL (NOTE 8) IS A TRIAL PIECE / PRINTED ALTERNATIVE.
2. THICKNESS 10, SET BY THE LID SEATING ON THE TRAY RIM. BOTH FACES ARE BOND SURFACES.
3. WAVE RIB λ18, WALL 1.6, CENTRE-LINE AMPLITUDE 5.2; CRESTS CUT FLAT = LANDS 4.28 ON BOTH FACES.
4. FRAME 6, CLOSED. SOLID TO y = 150; EACH FLUTE ENDS IN A 45° RAMP, 10 LONG, LONGEST AT ITS OPEN FACE (D–D), SO THE MOULD TEETH PULL STRAIGHT OUT.
5. AFTER MOULDING DRILL Ø4 × 7 + Ø3.2 × 15 IN THE BUTT FACE AND BOND AN M3 BRASS INSERT (EPOXY) FOR THE GRIP SCREW – SEE PB-GR-002.
6. BONDING THE SKINS: ABRADE (P120) AND DEGREASE BOTH FACES, EPOXY, PRESS FLAT BETWEEN PLATENS OR IN A VACUUM BAG.
7. PRINT FILE output/rib_support/hybrid_rib_support.stl (TRIAL PIECE: CHECKS THE MOULD CLOSES): FLAT, BED ≥ 391 × 196.
8. MASS 257 g. y FROM THE GRIP BUTT FACE (y = 0); THE RIB SUPPORT STARTS AT y = 5.


RIB SUPPORT – HYBRID

RIB SUPPORT (CORE) · MOULDED CARBON, ONE PIECE · 385 × 190 × 10 mm

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-25		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-HY-001	E	3 / 4	A3	1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	CARBON / EPOXY (NOTE 1)	ISSUED FOR REVIEW

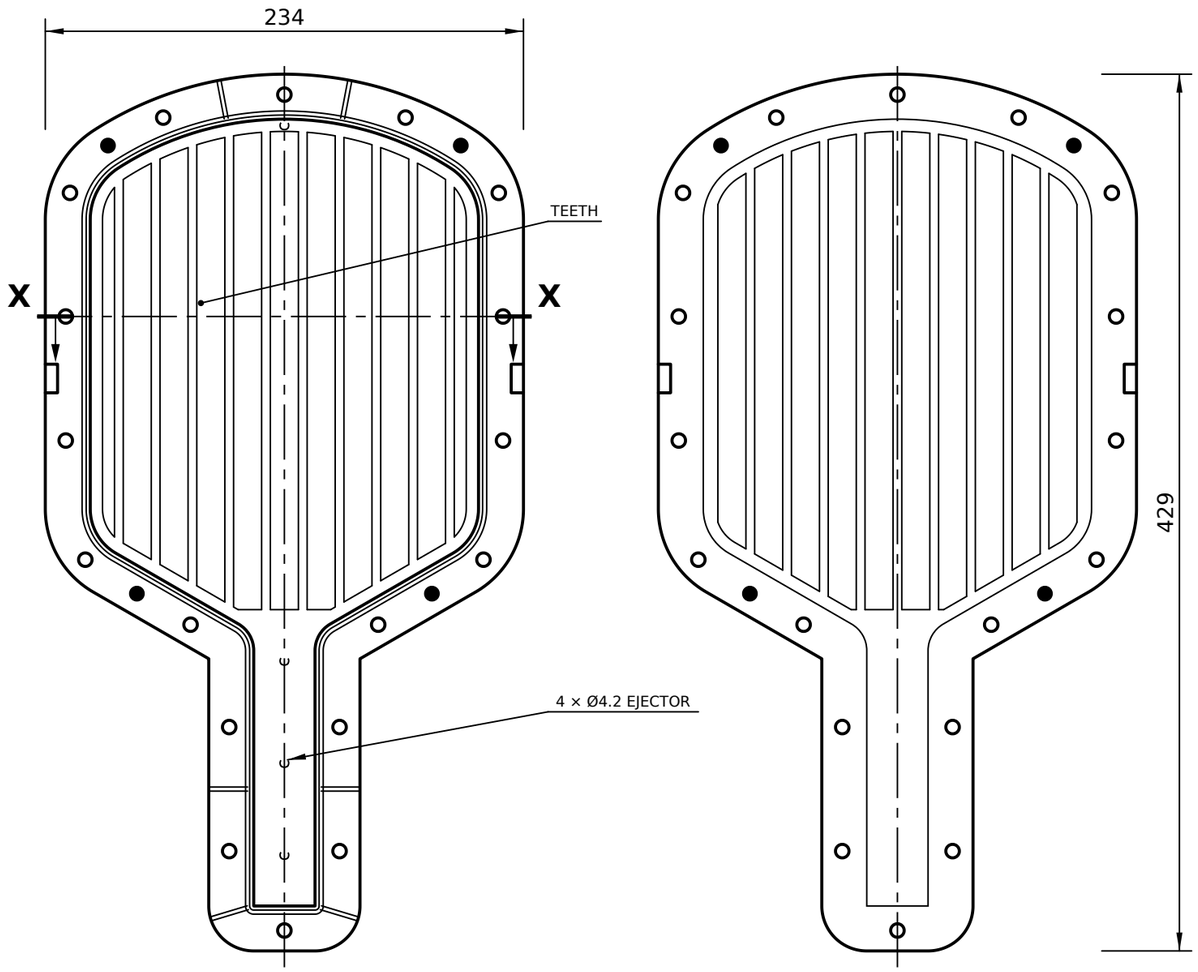


TRAY (BOTTOM HALF)

SCALE 1:3 · TEETH = BOTTOM FLUTES


LID, UNDERSIDE

SCALE 1:3 · TEETH = TOP FLUTES



SECTION X–X

SCALE 1:2 · CLOSED MOULD, MOULDED RIB SUPPORT BLACK, M6 BOLT

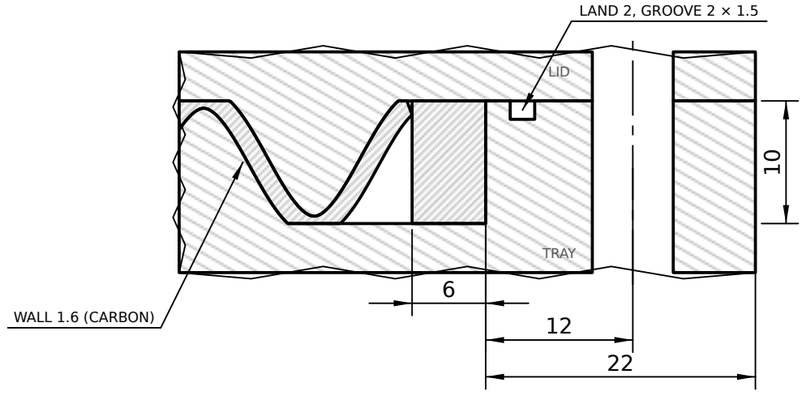

DETAIL Y

SCALE 2:1 · TEETH INTERLOCK; THE GAPS ARE THE WALLS AND THE FRAME

NOTES

1. TRAY (1) + LID (2): output/mould/hybrid_mould_bottom / _top (.stl / .step). THE CAVITY BETWEEN THEM IS THE RIB SUPPORT (SHEET 3); THE TEETH ARE ITS FLUTES. THE LID SEATS ON THE TRAY RIM: CORE HEIGHT 10, WALLS 1.6.
2. PRINT BOTH BACK DOWN, TEETH UP: ≥ 5 WALLS, ≥ 40 % INFILL, 0.12–0.16 LAYERS FOR THE TEETH, IRONING ON FLAT TOPS. NEEDS A ≥ 440 mm BED, OR MACHINE THE STEP FROM ALUMINIUM. ABOUT 1.3 + 1.0 kg OF PLA AT 100 %.
3. PLA SOFTENS NEAR 55 °C: ROOM-TEMPERATURE-CURE EPOXY ONLY. FOR A WARM CURE PRINT IN PETG, ASA OR PA-CF.
4. PREPARE: SAND THE CAVITY FACES (P400 → P800), SEAL (EPOXY COAT), WAX ×3 + PVA. PRESS THE 4 DOWEL PINS (4) INTO THE TRAY. PLUG THE EJECTOR HOLES FROM BELOW WITH TAPE.
5. FILL (FORGED CARBON): CHOP CARBON TOW TO 10–25 mm, WET IT WITH EPOXY (≈ 40 % FIBRE BY VOLUME). PACK THE WALL GAPS AND THE FRAME FIRST, THEN THE SOLID HANDLE ZONE; OVERFILL BY ≈ 10 %.
6. CLOSE: LID OVER THE DOWELS, BOLTS (3) FINGER-TIGHT, THEN PRESS BETWEEN 2 FLAT, STIFF PLATENS OR IN A PRESS UNTIL THE LID SEATS ON THE RIM; TIGHTEN THE BOLTS. EXCESS RESIN LEAVES BY THE OVERFLOW GROOVE AND THE VENTS.
7. CURE (24 h AT ROOM TEMPERATURE), SPLIT AT THE PRY NOTCHES, LIFT THE LID STRAIGHT UP, PUSH THE PART OUT WITH THE 4 EJECTOR PINS. TRIM THE FLASH, DRILL AND FIT THE M3 INSERT (SHEET 3). THE PART WEIGHS ≈ 257 g.
8. TRIAL FIRST: PRINT THE RIB SUPPORT STL IN PLA AND CLOSE THE EMPTY MOULD ON IT – IT MUST SEAT FULLY.

MOULD HARDWARE

ITEM	PART	QTY
1	Tray, hybrid_mould_bottom.stl	1
2	Lid, hybrid_mould_top.stl	1
3	Hex bolt M6 × 50, 2 washers, nut	18
4	Dowel pin Ø6 × 16, steel (ISO 2338)	4
5	Ejector pin Ø4 × 40 (or a drill shank)	4
6	Release wax + PVA; flat platens + clamps or a press	a/r


RIB SUPPORT MOULD – HYBRID

RIB SUPPORT MOULD · TRAY + LID, TEETH INTERLOCK · 234 × 429 mm

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-25		


DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-HY-001	E	4 / 4	A3	1:3, 1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	PLA / PETG (NOTE 2)	ISSUED FOR REVIEW

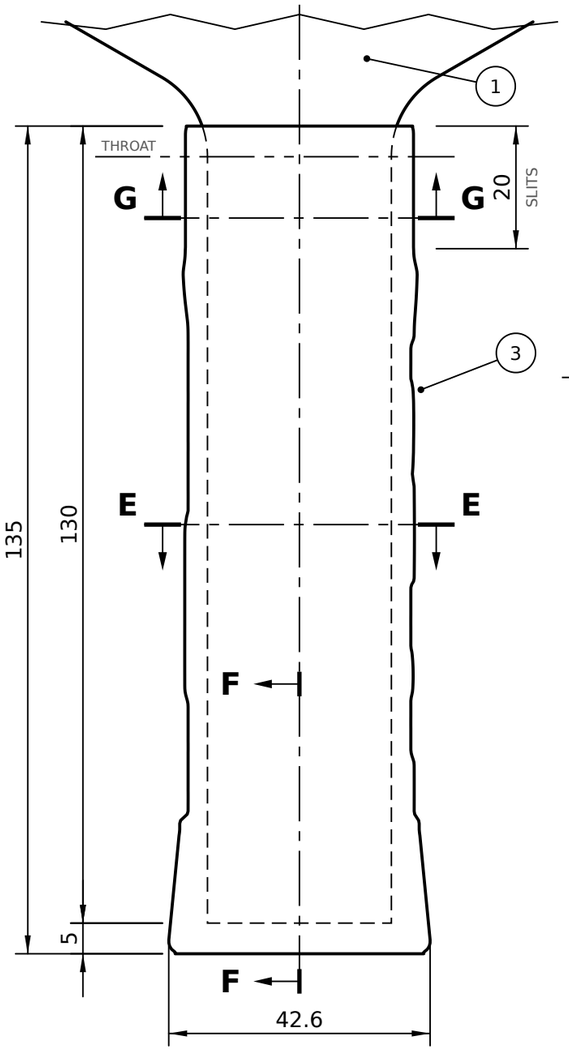


HANDLE IN THE GRIP (FACE VIEW)

SCALE 1:1 · DRAWN: CARBON MATRIX

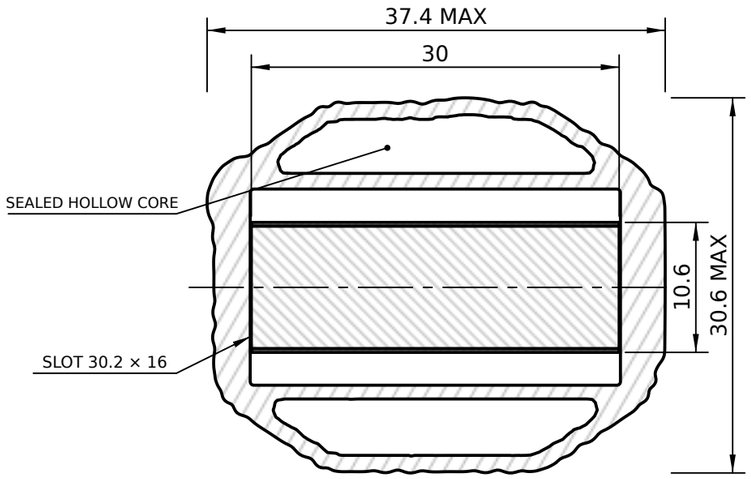


SECTION E–E

SCALE 2:1

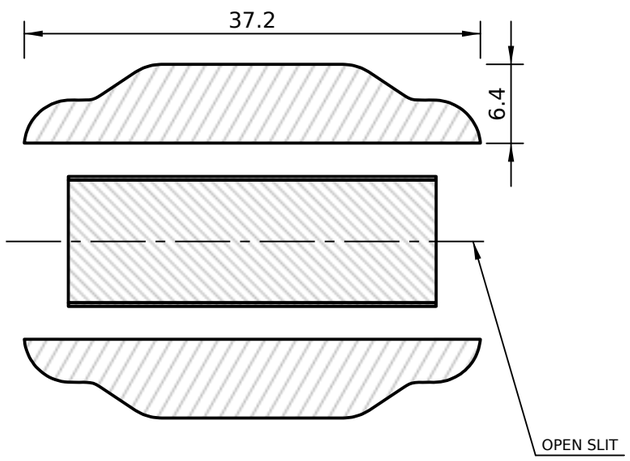


SECTION G–G

SCALE 2:1 · HEAD, IN THE SLIT ZONE (y = 120)

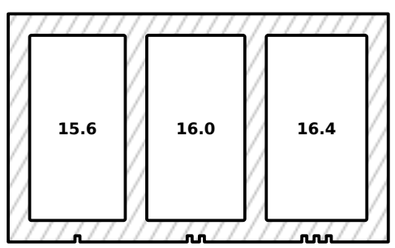

FIT-TEST COUPON (fit_test_slot.stl)

SCALE 1:1 · 8 THK · REV-8 SLOTS 15.6 / 16.0 / 16.4 × 30.2

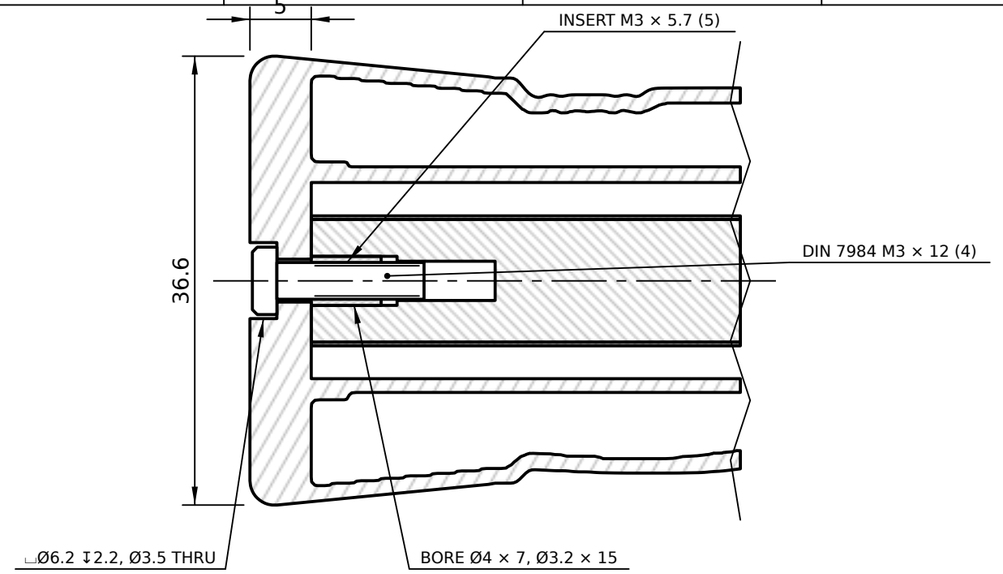

SECTION F–F (BUTT END)

SCALE 2:1

ITEM	PART	MATERIAL / SPECIFICATION	QTY	MASS g EL / HY
1	Face sheet	Woven carbon/epoxy 0.3 thk, cut to the profile DXF	2	23 / 21
2	Rib support	Moulded carbon, one piece – sheets 3 + 4 of PB-EL/HY-001	1	270 / 257
3	Grip	PLA printed, rev 8 (drawn CARBON MATRIX), slot: note 2	1	61
4	Screw	DIN 7984 M3 × 12 low-head cap screw, A2 stainless	1	1.0
5	Threaded insert	M3 brass, 5.7 long, bonded in a Ø4 bore	1	0.4
6	Adhesive	Epoxy: skins onto the rib support, insert	a/r	–
COMPLETE PADDLE WITH GRIP (3D MODEL)				**379 / 362**

NOTES

1. GRIP (3): ANY OF THE TEN REV-8 PRINTED GRIPS (pickleball_grips) - SAME INTERFACE, DIFFERENT SURFACE; DRAWN: CARBON MATRIX. PLA 60–65 g (61.2 g DRAWN). PRINT UPRIGHT, BUTT DOWN, 100 % INFILL, NO SUPPORTS.
2. REV-8 SLOT 30.2 × 16 × 130 DEEP, 1 LEAD-IN; HANDLE 30 × 10.6 (0.3 / 10 / 0.3, MOULDED) = 5.4 LOOSE. REGENERATE THE GRIPS WITH SLOT_T = 10.6 (pickleball_grips/scripts/grip_core.py) AND THE COUPON AT 10.2 / 10.6 / 11.
3. END WALLS SLIT OVER THE TOP 20 (y 115–135) SO THE THROAT FLARE (FROM y = 130) PASSES; THE GRIP SEATS ON THE BODY BUTT AT y = 5 (= GRIP BASE 5).
4. INSERT (5): BRASS M3 × 5.7, BONDED WITH EPOXY INTO THE Ø4 BORE DRILLED IN THE MOULDED CORE BUTT, FLUSH.
5. SCREW (4): DIN 7984 M3 × 12 LOW-HEAD (M3 × 16 ALSO FITS), LOW-STRENGTH THREADLOCKER, HAND-TIGHT (≈0.5 N·m) SO THE PLA BASE DOES NOT CRACK; 2.8 OF FLOOR UNDER THE HEAD.
6. OVERALL LENGTH 390 INCL. THE 5 GRIP BASE; HANDLE 130 FROM THE BUTT TO THE THROAT. MASS WITH GRIP 379 / 362 g (EL / HY).
7. SAME GRIP ON PB-EL-001 AND PB-HY-001. ALL DIMENSIONS IN mm.

PRINTED GRIP – PADDLE INTERFACE

PRINTED GRIP 135 LONG, SLOT 30.2 × 16 · M3 LOW-HEAD SCREW + BONDED INSERT · BOTH PADDLES

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-25		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-GR-002	E	1 / 1	A3	1:1, 2:1	mm

PROJECTION	MATERIAL	STATUS
	SEE BOM	ISSUED FOR REVIEW