


FRONT ELEVATION · SWING TWIN

scale 1:4 · cards omitted · left rack 27.5 lower

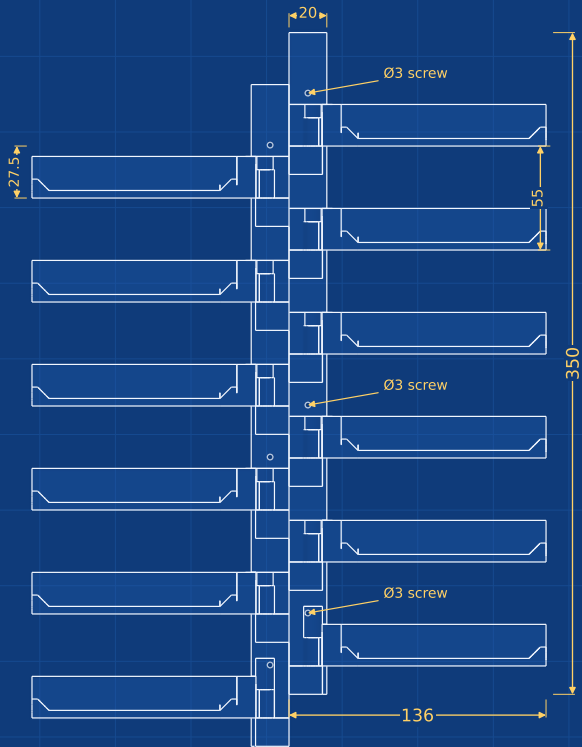


SIDE

1:4, from the left




SWING TWIN · 12 CARDED CARS

isometric · NTS · every card name stays visible

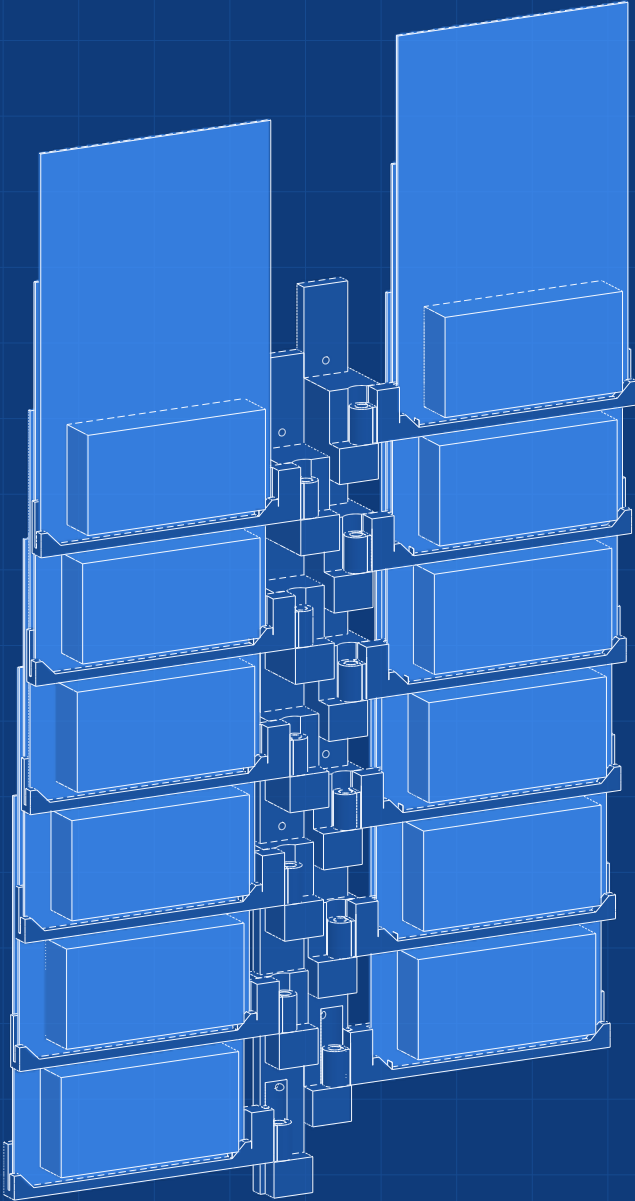

SLIDE TWIN · FIXED RACKS

isometric · NTS · cards slide in from the open ends

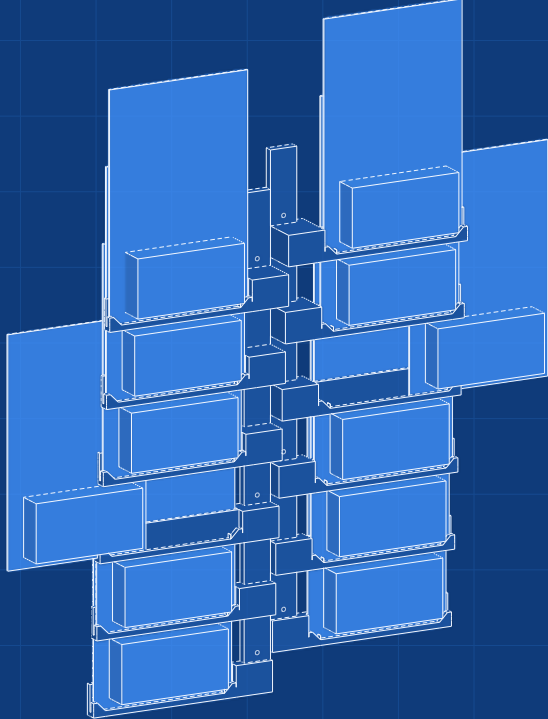


ITEM	PART	QTY	PRINT
1	SWING wall mount 350 x 20, 6 pins Ø5 (R or L)	1	on back edge
2	SWING ledge, socket ring Ø10.2 / hole Ø5.5	6	standing
3	SLIDE rack 350 x 136, one piece (R or L)	1	on back edge
-	Screw Ø3-3.5 + wall plug	3	-

TWIN: right rack + mirrored left rack, spines back to back, left rack 27.5 mm lower so the ledges alternate.
SLIDE: card slides into the 1.8 mm slot from the open end, the solid block next to the spine is the end stop.

OPERATION SEQUENCE · SWING


how the hinge works (the SLIDE rack only needs step 1, then cards slide in)

1 SCREW THE WALL MOUNT

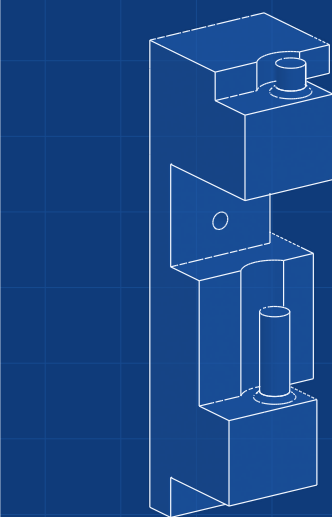


3 screws, pins point up

2 DROP THE LEDGE ON ITS PIN

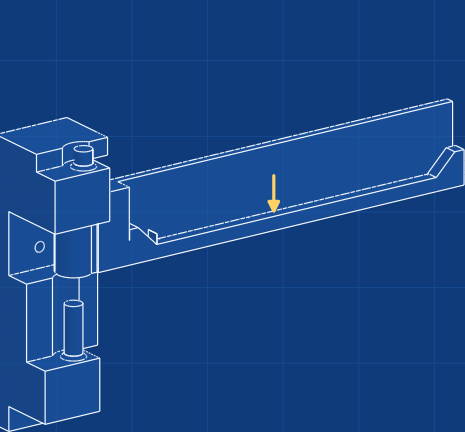


the ring sits on the knuckle

3 SWING OUT, SLIDE THE CARD IN

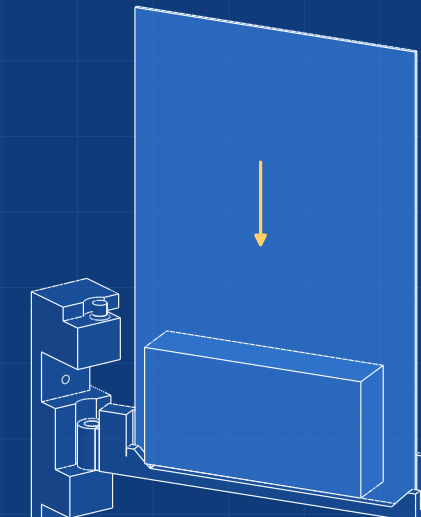

0° stop at closed, opens to 135°

4 TO REMOVE: LIFT 15.5, PULL OUT


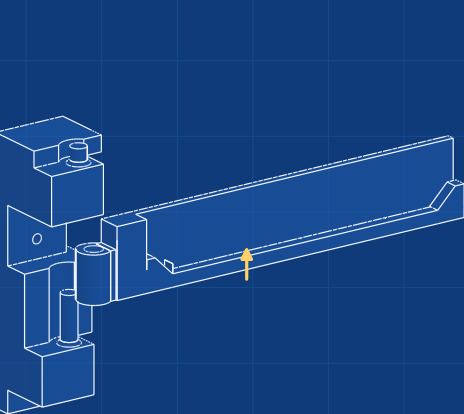


pin and ring are 15 mm long


PRODUCT	PITLANE SWING & SLIDE wall racks, carded 1:64 die-cast
DRAWING	General arrangement & operation
SOURCE	build_liftoff.py, build_fixed.py units: mm
SCALE	as noted (1:4 orthographic, iso NTS)
MATERIAL	PLA+ / PETG, 0.2 mm layers, no supports
DATE	2026-10-06
SHEET	1 of 2

1 SWING WALL MOUNT (right)

front & side 1:5 · details 2:1

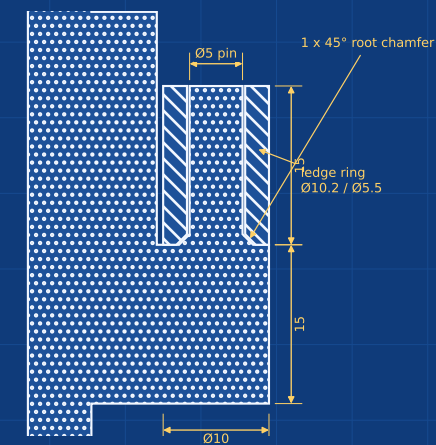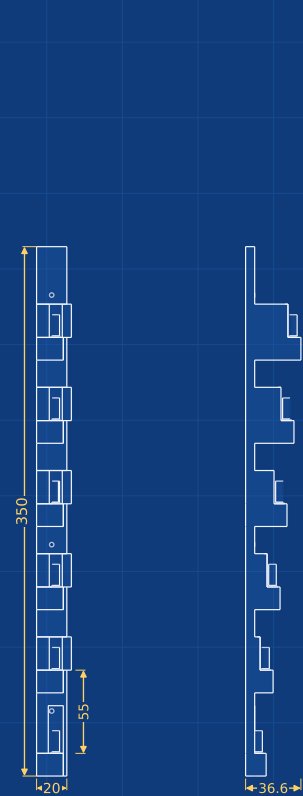



DETAIL A section on the pin axis (2:1)
knuckle + pin from LiftOffHinge.stl; ledge ring sits on the knuckle

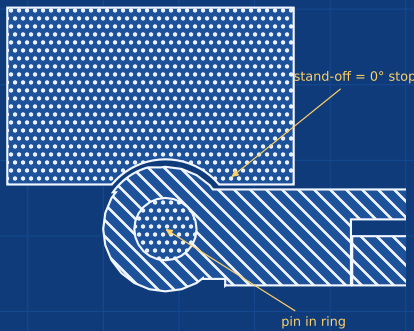


DETAIL B plan section through the hinge (2:1)

2 SWING LEDGE (row 3 shown)

top & front 1:1 · section D-D 4:1 · iso NTS

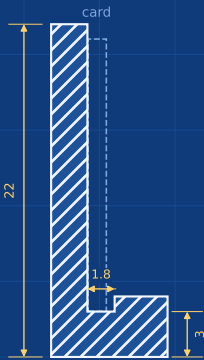
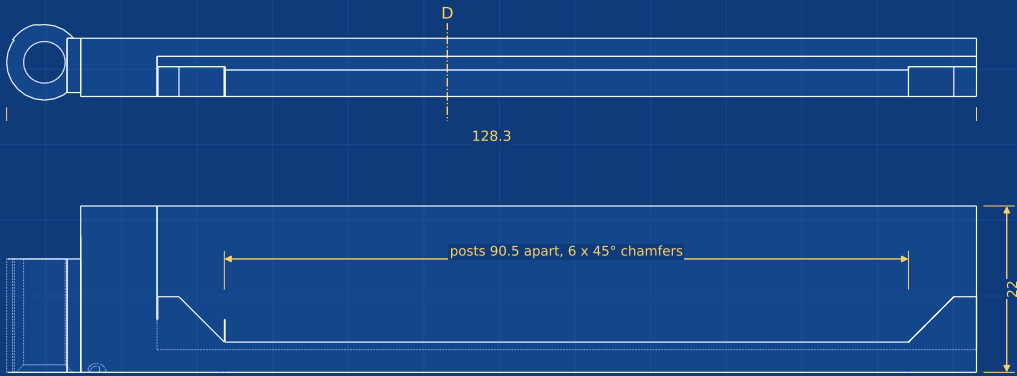


SECTION D-D (4:1)
card slot 1.8 (1.3 at the corner posts)

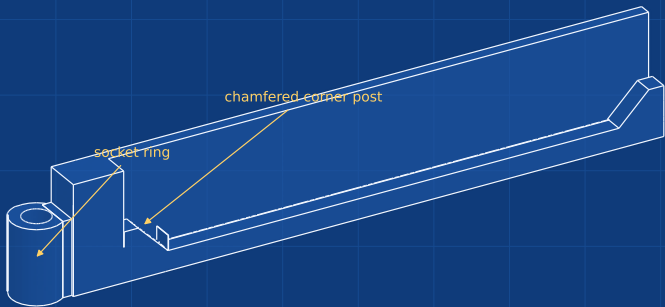

3 SLIDE RACK (right)

front & side 1:5 · iso NTS

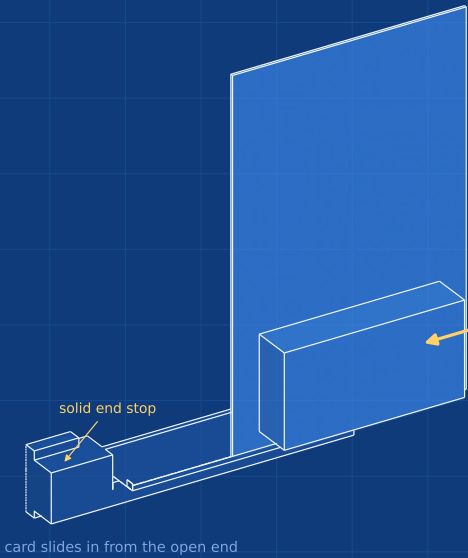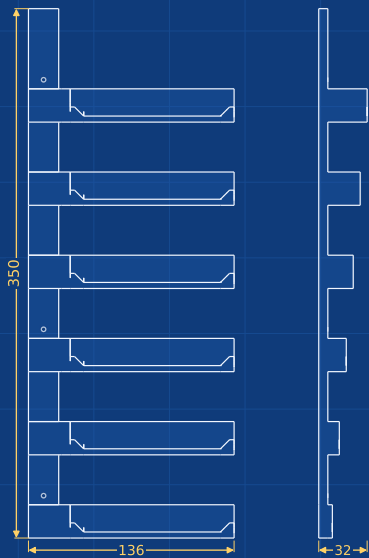

HINGE FUNCTION


plan section through the hinge, 1:1 · closed (stop) / open 90° / open 135°



0°



90°



135°

NOTES

- Card ~105 x 165 x 1.2 mm, blister up to 42 mm. Slot 1.8 mm.
- SWING: ring Ø5.5 on pin Ø5 (0.25 radial clearance), stops ~3° past closed on the stand-off, opens to 135°. Lift 15.5 mm to remove.
- Twin: left rack mirrored, hung 27.5 mm lower, spines touching. One side opened at a time never touches the other; both together are clear to 75° (leave 20 mm between spines for 90°).
- SLIDE: one piece, card slides in 105 mm from the open end.
- No supports: wall mount / SLIDE rack on the flat back edge, ledges standing on their bottom face (ring vertical).
- Fit verified on the CAD model by boolean collision checks. Print tolerances may need tuning on your printer.

PRODUCT	PITLANE SWING & SLIDE wall racks, carded 1:64 die-cast
DRAWING	Part details
SOURCE	build_liftoff.py, build_fixed.py units: mm
SCALE	as noted on each view
MATERIAL	PLA+ / PETG, 0.2 mm layers, no supports
DATE	2026-10-06
SHEET	2 of 2