

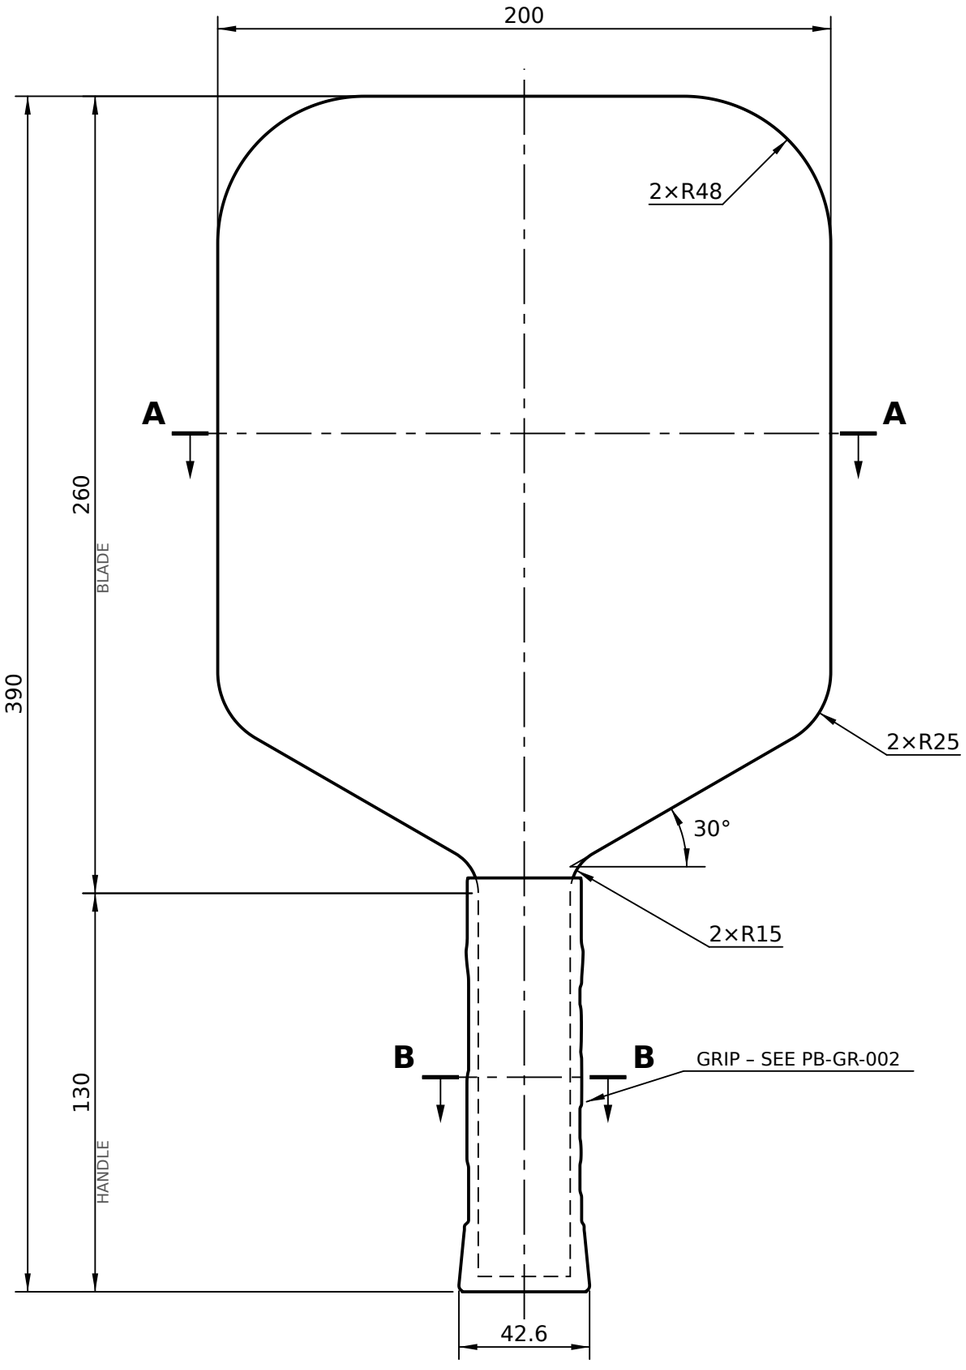


FRONT VIEW




SIDE VIEW

LAY-UP 0.3/10/0.3

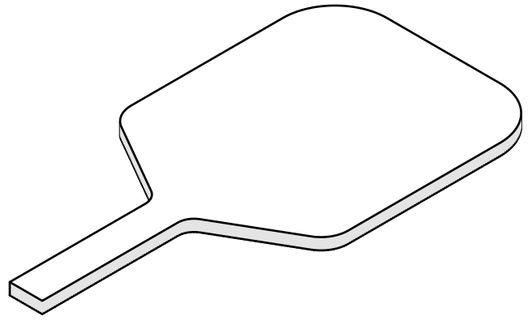


ISOMETRIC VIEW

SCALE 1:4 (BODY ONLY)

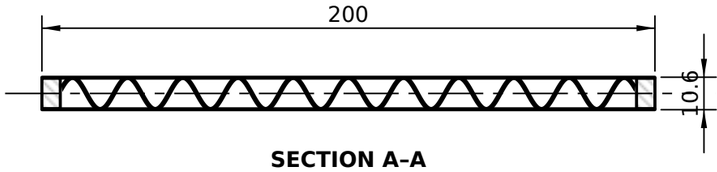

SECTION A–A

SCALE 1:2 · CF 0.3 / WAVE-RIB CORE 10 / CF 0.3 · CORE DETAIL: SHEET 3



SECTION B–B

SCALE 1:1 · REV-8 GRIP, SLOT 16: PB-GR-002

NOTES

1. ALL DIMENSIONS IN MILLIMETRES. DO NOT SCALE THE DRAWING. UNLESS STATED: LINEAR ±0.5, ANGULAR ±0.5°.
2. PROFILE SYMMETRICAL ABOUT THE CENTRE LINE. ALL ARCS TANGENT TO ADJOINING EDGES.
3. SANDWICH: CF FACE SHEET 0.3 + WAVE-RIB CORE 10 + CF FACE SHEET 0.3 = 10.6 ±0.2, SET BY THE MOULD (SHEET 4). BODY (SHEETS + CORE) FROM y = 5 TO THE TIP; GRIP BASE y = 0 … 5.
4. FACE SHEETS (2 OFF, IDENTICAL): WOVEN CARBON/EPOXY 0.3 THK (CURED), CUT TO PB-EL-001_profile.dxf (TEMPLATE: SHEET 2), TRIMMED FLUSH WITH THE CORE EDGE.
5. RIB SUPPORT (CORE): 3D-PRINTED PA-CF IN ONE PIECE, CLOSED FRAME 6, WAVE RIB λ18 / WALL 1.6 / LANDS 4.28, SOLID TO y = 150 WITH 45° FLUTE RUN-OUT – SEE SHEET 3.
6. SHEETS LAMINATED ONTO THE CORE IN THE TWO-HALF COMPRESSION MOULD (SHEET 4): EPOXY, ABRADED + PRIMED CORE FACES, CLOSED TO THE HARD STOP.
7. STRENGTH: NOT QUALIFIED. THE HAND CHECK (analysis/hand_check.json) GIVES RF < 1 FOR THE 500 N BALL IMPACT WITH 0.3 SHEETS (HANDLE ABOVE THE GRIP, SKIN BETWEEN LANDS) – SEE THE README.
8. GRIP: PRINTED PLA GRIP (ANY OF THE TEN REV-8 DESIGNS; DRAWN: CARBON MATRIX, 61 g), LOCKED BY A DIN 7984 M3 × 12 SCREW INTO AN M3 HEAT-SET INSERT. REV-8 SLOT 16 > HANDLE 10.6: REGENERATE – PB-GR-002.
9. USA PICKLEBALL LIMITS: L + W = 590 ≤ 609.6 (24 in), L = 390 ≤ 431.8 (17 in), INCL. GRIP. AN EDGE GUARD COUNTS TOWARDS THESE LIMITS (MARGIN 19.6).
10. MASS 323 g WITH THE GRIP, BALANCE POINT 198 FROM THE BUTT (FROM THE 3D MODEL).

PICKLEBALL PADDLE – ELONGATED

GENERAL ARRANGEMENT · 390 × 200 × 10.6 mm · CF / WAVE-RIB SANDWICH

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-24		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	D	1 / 4	A3	1:2	mm

PROJECTION	MATERIAL	STATUS
	SEE NOTES	ISSUED FOR REVIEW