

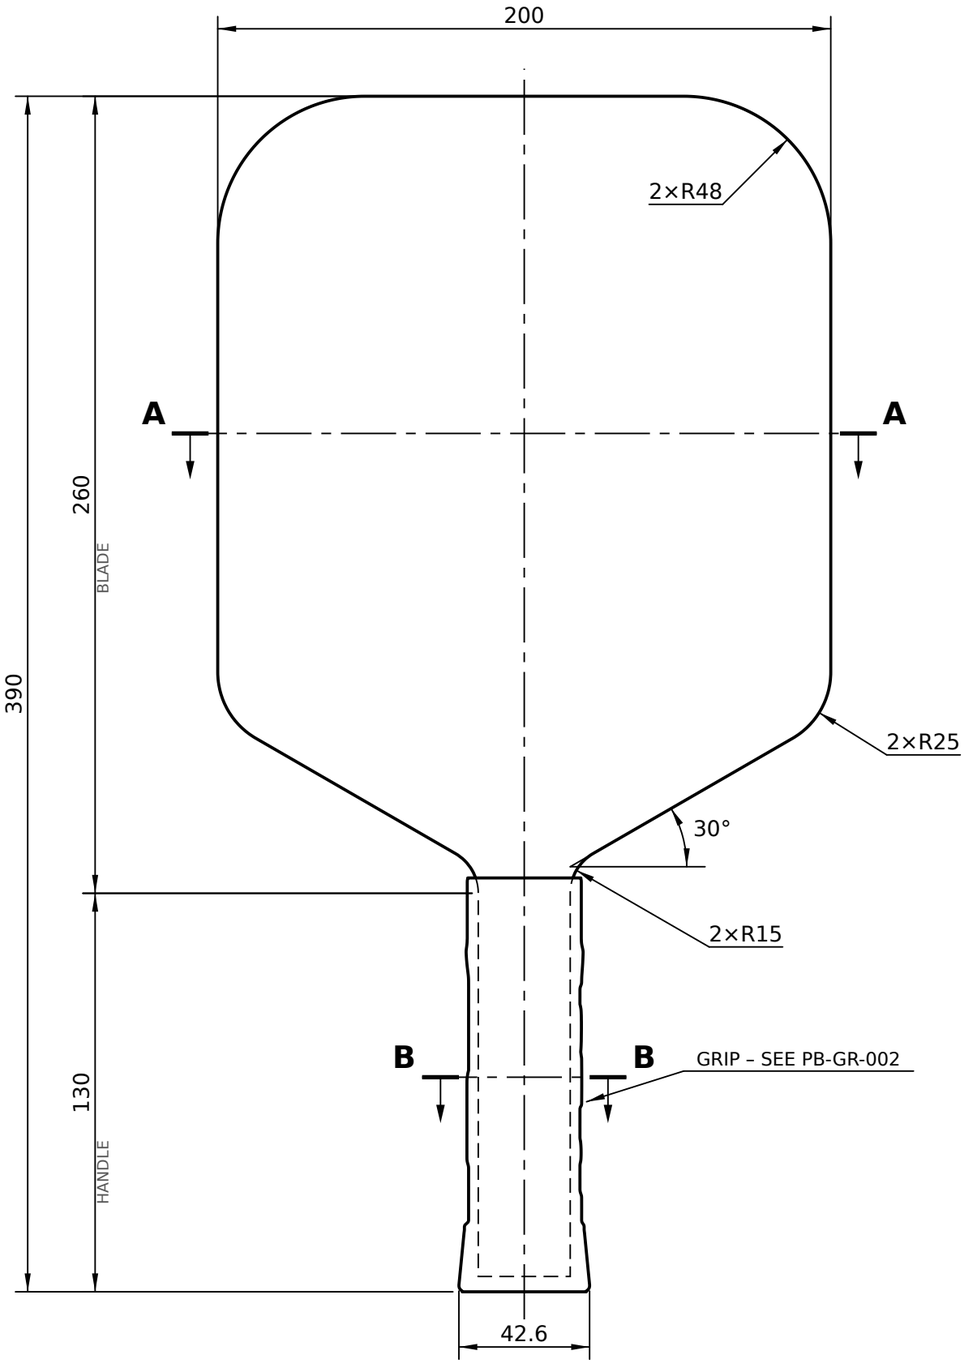


FRONT VIEW




SIDE VIEW

LAY-UP 0.3/10/0.3

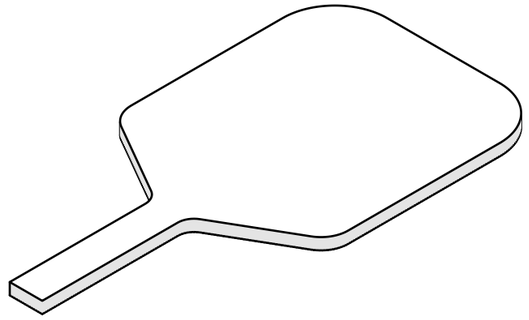


ISOMETRIC VIEW

SCALE 1:4 (BODY ONLY)

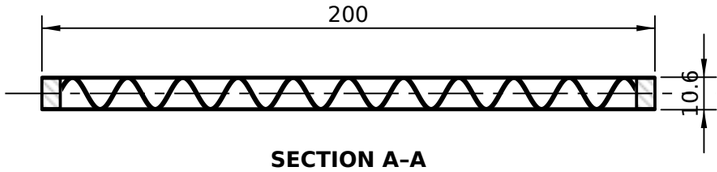

SECTION A–A

SCALE 1:2 · CF 0.3 / WAVE-RIB CORE 10 / CF 0.3 · CORE DETAIL: SHEET 3



SECTION B–B

SCALE 1:1 · REV-8 GRIP, SLOT 16: PB-GR-002

NOTES

1. ALL DIMENSIONS IN MILLIMETRES. DO NOT SCALE THE DRAWING. UNLESS STATED: LINEAR ±0.5, ANGULAR ±0.5°.
2. PROFILE SYMMETRICAL ABOUT THE CENTRE LINE. ALL ARCS TANGENT TO ADJOINING EDGES.
3. SANDWICH: CF FACE SHEET 0.3 + WAVE-RIB CORE 10 + CF FACE SHEET 0.3 = 10.6 ±0.2, SET BY THE MOULD (SHEET 4). BODY (SHEETS + CORE) FROM y = 5 TO THE TIP; GRIP BASE y = 0 … 5.
4. FACE SHEETS (2 OFF, IDENTICAL): WOVEN CARBON/EPOXY 0.3 THK (CURED), CUT TO PB-EL-001_profile.dxf (TEMPLATE: SHEET 2), TRIMMED FLUSH WITH THE CORE EDGE.
5. RIB SUPPORT (CORE): 3D-PRINTED PA-CF IN ONE PIECE, CLOSED FRAME 6, WAVE RIB λ18 / WALL 1.6 / LANDS 4.28, SOLID TO y = 150 WITH 45° FLUTE RUN-OUT – SEE SHEET 3.
6. SHEETS LAMINATED ONTO THE CORE IN THE TWO-HALF COMPRESSION MOULD (SHEET 4): EPOXY, ABRADED + PRIMED CORE FACES, CLOSED TO THE HARD STOP.
7. STRENGTH: NOT QUALIFIED. THE HAND CHECK (analysis/hand_check.json) GIVES RF < 1 FOR THE 500 N BALL IMPACT WITH 0.3 SHEETS (HANDLE ABOVE THE GRIP, SKIN BETWEEN LANDS) – SEE THE README.
8. GRIP: PRINTED PLA GRIP (ANY OF THE TEN REV-8 DESIGNS; DRAWN: CARBON MATRIX, 61 g), LOCKED BY A DIN 7984 M3 × 12 SCREW INTO AN M3 HEAT-SET INSERT. REV-8 SLOT 16 > HANDLE 10.6: REGENERATE – PB-GR-002.
9. USA PICKLEBALL LIMITS: L + W = 590 ≤ 609.6 (24 in), L = 390 ≤ 431.8 (17 in), INCL. GRIP. AN EDGE GUARD COUNTS TOWARDS THESE LIMITS (MARGIN 19.6).
10. MASS 323 g WITH THE GRIP, BALANCE POINT 198 FROM THE BUTT (FROM THE 3D MODEL).


PICKLEBALL PADDLE – ELONGATED

GENERAL ARRANGEMENT · 390 × 200 × 10.6 mm · CF / WAVE-RIB SANDWICH

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-24		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	D	1 / 4	A3	1:2	mm

PROJECTION	MATERIAL	STATUS
	SEE NOTES	ISSUED FOR REVIEW

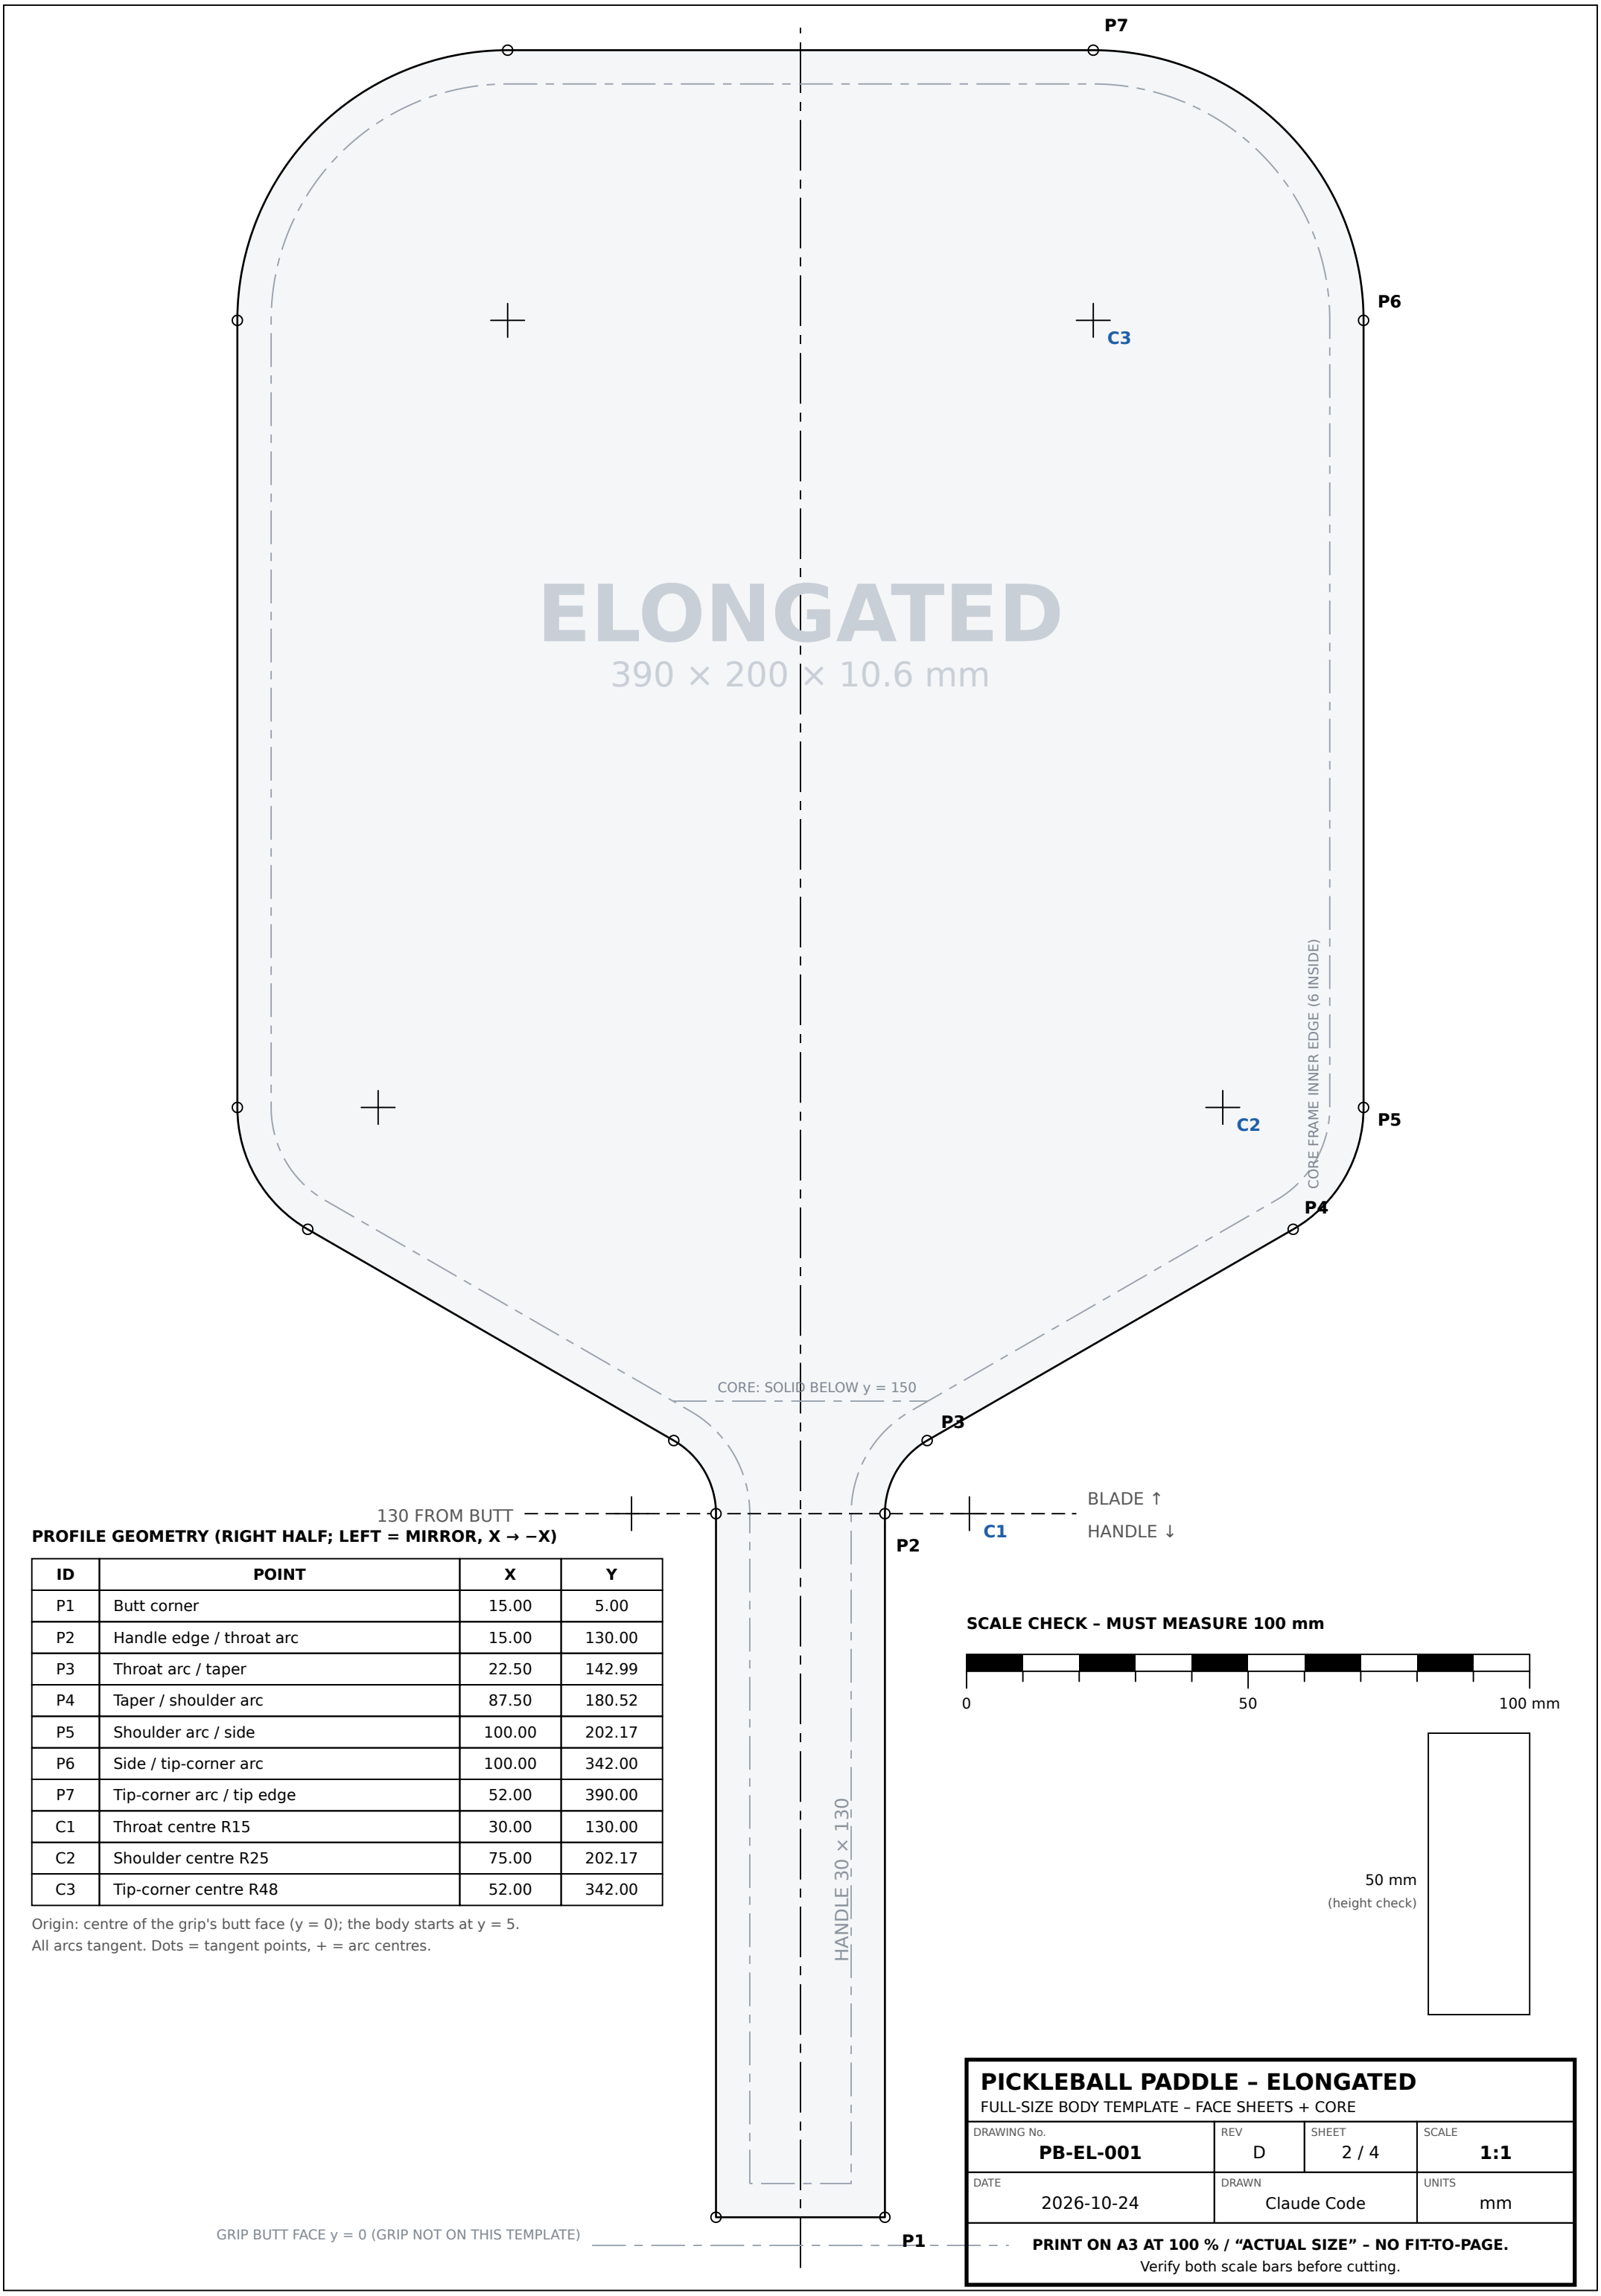

PROFILE GEOMETRY (RIGHT HALF; LEFT = MIRROR, X → −X)

ID	POINT	X	Y
P1	Butt corner	15.00	5.00
P2	Handle edge / throat arc	15.00	130.00
P3	Throat arc / taper	22.50	142.99
P4	Taper / shoulder arc	87.50	180.52
P5	Shoulder arc / side	100.00	202.17
P6	Side / tip-corner arc	100.00	342.00
P7	Tip-corner arc / tip edge	52.00	390.00
C1	Throat centre R15	30.00	130.00
C2	Shoulder centre R25	75.00	202.17
C3	Tip-corner centre R48	52.00	342.00

Origin: centre of the grip's butt face (y = 0); the body starts at y = 5.
All arcs tangent. Dots = tangent points, + = arc centres.

SCALE CHECK – MUST MEASURE 100 mm


PICKLEBALL PADDLE – ELONGATED

FULL-SIZE BODY TEMPLATE – FACE SHEETS + CORE

DRAWING No.	REV	SHEET	SCALE
PB-EL-001	D	2 / 4	**1:1**


DATE	DRAWN	UNITS
2026-10-24	Claude Code	mm

PRINT ON A3 AT 100 % / “ACTUAL SIZE” – NO FIT-TO-PAGE.
Verify both scale bars before cutting.

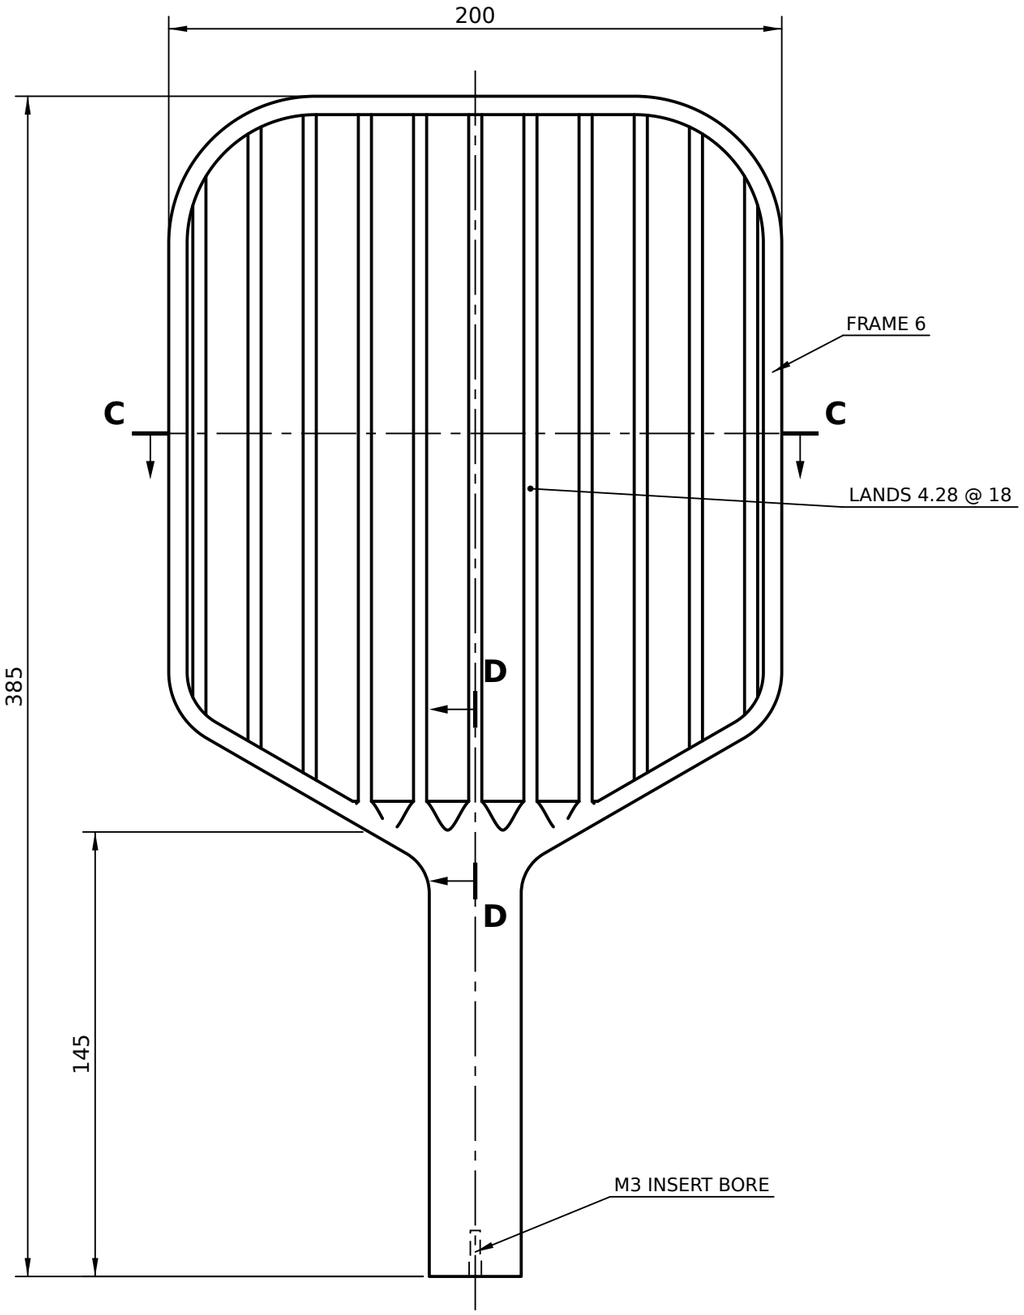


PLAN VIEW (TOP FACE)

SCALE 1:2 · BOTTOM LANDS OFFSET ½ PITCH

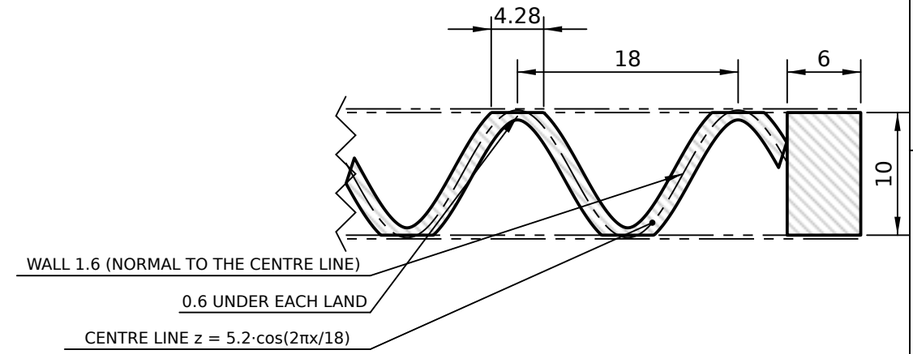

SECTION C–C (PART)

SCALE 2:1 · FACE SHEETS SHOWN PHANTOM

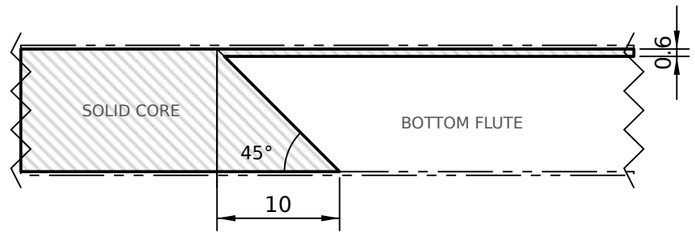

SECTION D–D (PART)

SCALE 2:1 · ON THE CENTRE LAND (x = 0), RUN-OUT FROM y = 150; TOP FLUTES MIRROR IT

NOTES

1. MATERIAL: PA-CF (CARBON-FIBRE-FILLED NYLON), E ≈ 4 GPa, ρ 1.18 g/cm³. DRY THE FILAMENT BEFORE PRINTING.
2. PRINT FLAT, 100 % SOLID: WALL 1.6 = 4 PERIMETERS (0.4 NOZZLE), 0.2 LAYERS. NO SUPPORTS (45° RUN-OUTS).
3. THICKNESS 10 ±0.1. BOTH FACES ARE BOND SURFACES, FLAT WITHIN 0.1.
4. WAVE RIB λ18, WALL 1.6, CENTRE-LINE AMPLITUDE 5.2; CRESTS CUT FLAT = LANDS 4.28 ON BOTH FACES.
5. FRAME 6, CLOSED. SOLID TO y = 150; EACH FLUTE STARTS WITH A 45° RUN-OUT, 10 LONG (D–D).
6. M3 HEAT-SET INSERT BORE Ø4 × 7 + Ø3.2 × 15 IN THE BUTT FACE (GRIP SCREW) – SEE PB-GR-002.
7. BONDING: ABRADE (P120) AND DEGREASE BOTH FACES; THE SHEETS ARE LAMINATED ON IN THE MOULD (SHEET 4).
8. PRINT FILE output/rib_support/elongated_rib_support.stl: ONE PIECE, FLAT, BED ≥ 391 × 206.
   IT DROPS INTO THE MOULD POCKET (+0.2 CLEARANCE); PLUG THE INSERT BORE BEFORE MOULDING.
9. MASS 214 g. y FROM THE GRIP BUTT FACE (y = 0); THE RIB SUPPORT STARTS AT y = 5.


RIB SUPPORT – ELONGATED

RIB SUPPORT (CORE) · 3D-PRINTED PA-CF · 385 × 200 × 10 mm

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-24		


DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	D	3 / 4	A3	1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	PA-CF (NOTE 1)	ISSUED FOR REVIEW

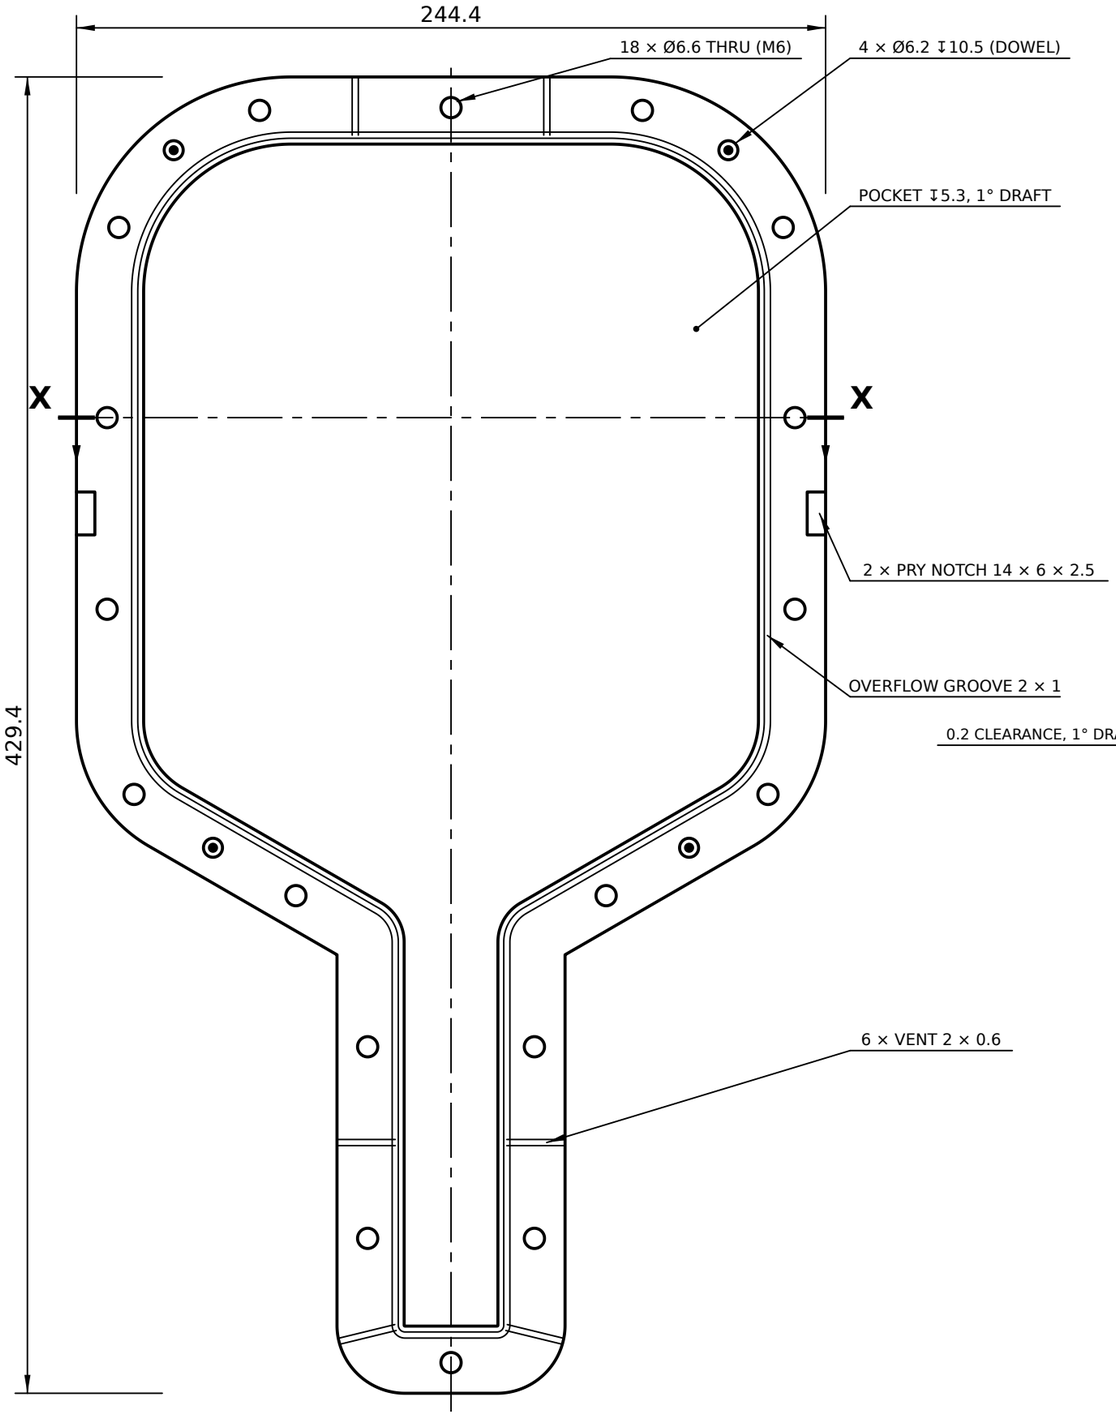


MOULD HALF – PARTING FACE

SCALE 1:2 · BOTH HALVES ARE THIS PART



SECTION X–X

SCALE 1:2 · CLOSED MOULD, SANDWICH 0.3 / 10 / 0.3, M6 BOLT

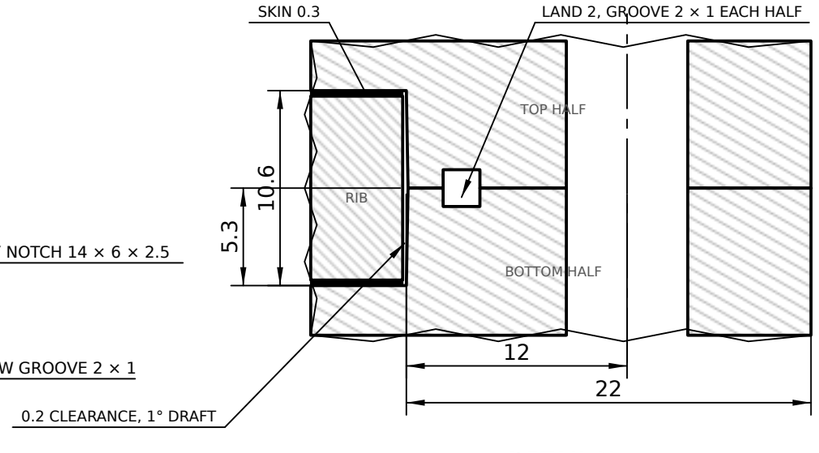

DETAIL Y

SCALE 3:1 · EDGE OF THE CLOSED MOULD AT X–X

MOULD HARDWARE

ITEM	PART	QTY
1	Mould half, elongated_mould_half.stl (print 2)	2
2	Hex bolt M6 × 45, 2 washers, nut	18
3	Dowel pin Ø6 × 20, steel (ISO 2338)	4
4	Release wax + PVA, or release film	a/r
5	Flat platens ≥ 18 mm + clamps, or press	2

NOTES

1. MOULD HALF (1): PRINT TWICE – BOTH HALVES ARE THE SAME PART (output/mould/elongated_mould_half.stl / .step); TURN ONE OVER ONTO THE OTHER. POCKET 5.3 DEEP IN EACH HALF = CAVITY 10.6 = SKIN 0.3 + RIB SUPPORT 10 + SKIN 0.3 WHEN THE FLANGES MEET.
2. PRINT POCKET UP, BACK ON THE BED: ≥ 5 WALLS, ≥ 40 % INFILL, 6 TOP LAYERS + IRONING ON THE POCKET FLOOR. NEEDS A ≥ 440 mm BED; OR MACHINE THE STEP FROM ALUMINIUM / HDPE. ABOUT 1.1 kg OF PLA AT 100 % INFILL.
3. PLA SOFTENS NEAR 55 °C: ROOM-TEMPERATURE-CURE EPOXY ONLY. FOR A WARM POST-CURE PRINT IN PETG, ASA OR PA-CF.
4. PREPARE: SAND THE POCKET FLOORS (P400 → P800), SEAL (EPOXY COAT OR PRIMER), WAX + PVA RELEASE, OR LINE WITH RELEASE FILM. PRESS THE 4 DOWEL PINS (3) INTO ONE HALF.
5. LAY UP IN THE BOTTOM HALF: SKIN (CUT TO THE PROFILE, 0.5 UNDERSIZE), WET OUT → RIB SUPPORT (FACES ABRADED, M3 INSERT FITTED, SCREW IN IT) → TOP SKIN, WET OUT → TOP HALF OVER THE DOWELS. THE POCKET LOCATES THE RIB SUPPORT (+0.2).
6. CLOSE: BOLTS (2) FINGER-TIGHT, THEN PRESS THE MOULD BETWEEN 2 FLAT, STIFF PLATENS (≥ 18 mm PLY OR ALUMINIUM, CLAMPS EVERY ~100 mm), IN A PRESS OR IN A VACUUM BAG UNTIL THE FLANGES MEET; THEN TIGHTEN THE BOLTS. BOLTS ALONE BOW A PRINTED MOULD AND CANNOT PRESS THE MIDDLE OF THE BLADE.
7. EXCESS RESIN FILLS THE OVERFLOW GROOVE (2 × 1 IN EACH HALF) AND LEAVES BY THE 6 VENTS. CURE, SPLIT AT THE PRY NOTCHES, TRIM THE FLASH AT THE EDGE.
8. MEASURE THE RIB SUPPORT (10 ±0.1) BEFORE MOULDING; SAND THE LANDS IF THICK. SHIM THE FLANGE (TAPE / FOIL) TO OPEN THE CAVITY, E.G. FOR PRE-CURED SKINS AND GLUE LINES.


COMPRESSION MOULD – ELONGATED

TWO-HALF COMPRESSION MOULD · CAVITY 10.6 mm · 244.4 × 429.4 × 15.3 mm PER HALF


DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-24		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	D	4 / 4	A3	1:2, 3:1	mm

PROJECTION	MATERIAL	STATUS
	PLA / PETG (NOTE 2)	ISSUED FOR REVIEW

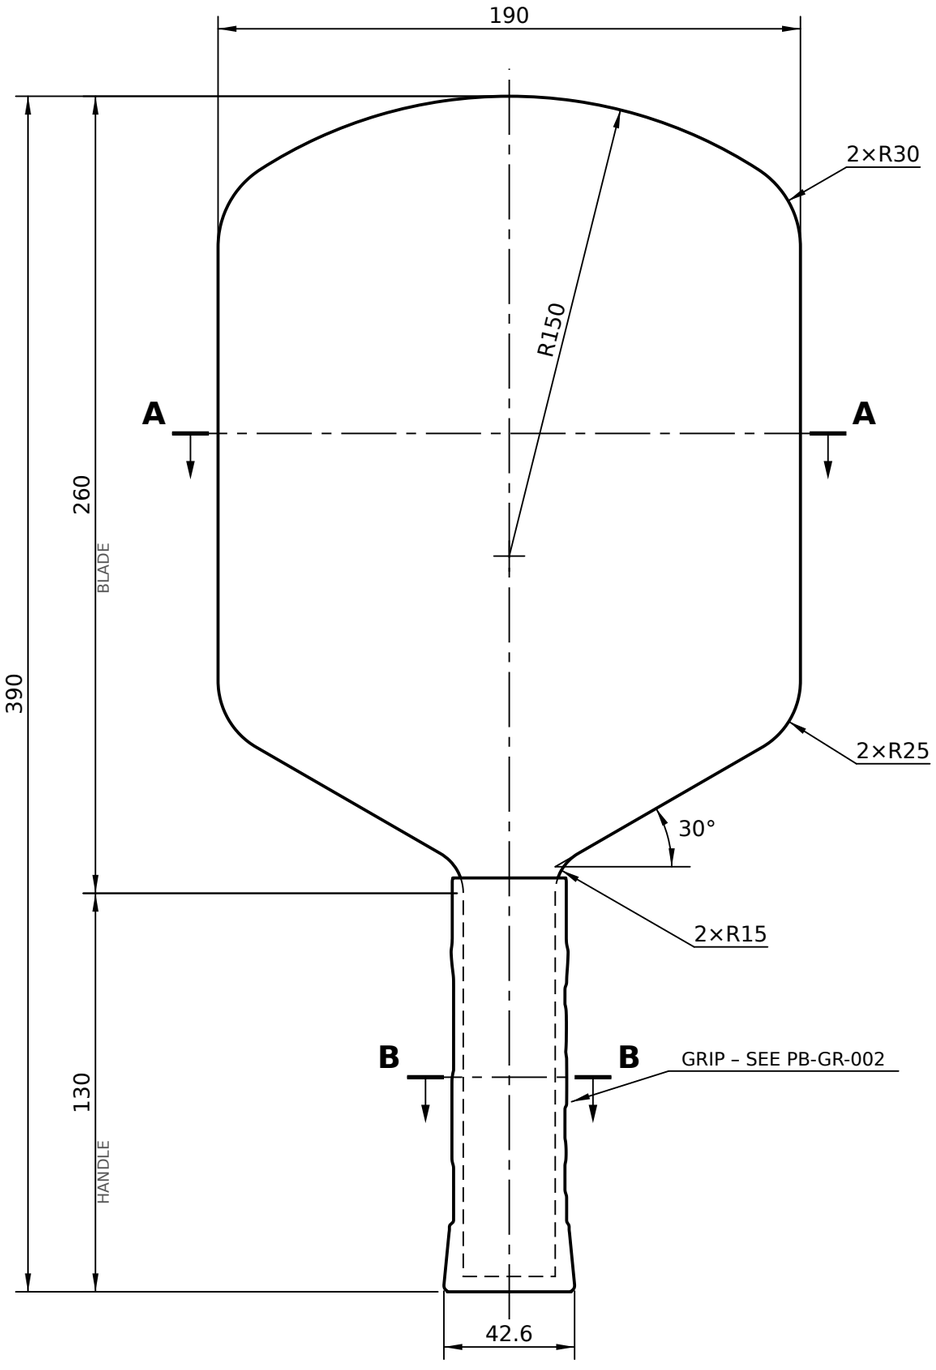


FRONT VIEW

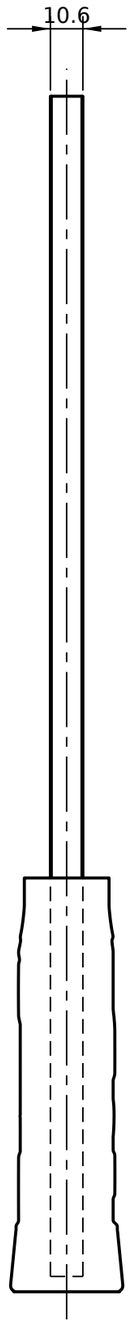


SIDE VIEW

LAY-UP 0.3/10/0.3

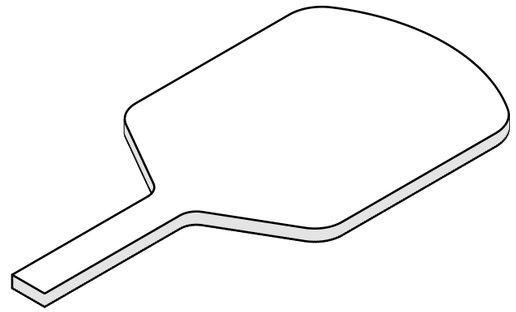


ISOMETRIC VIEW

SCALE 1:4 (BODY ONLY)

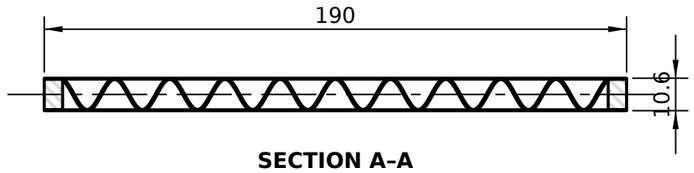

SECTION A–A

SCALE 1:2 · CF 0.3 / WAVE-RIB CORE 10 / CF 0.3 · CORE DETAIL: SHEET 3

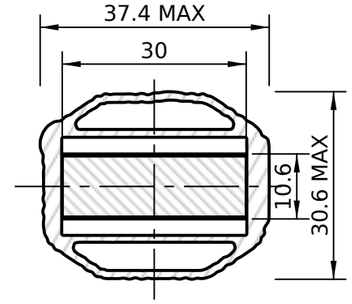

SECTION B–B

SCALE 1:1 · REV-8 GRIP, SLOT 16: PB-GR-002

NOTES

1. ALL DIMENSIONS IN MILLIMETRES. DO NOT SCALE THE DRAWING. UNLESS STATED: LINEAR ±0.5, ANGULAR ±0.5°.
2. PROFILE SYMMETRICAL ABOUT THE CENTRE LINE. ALL ARCS TANGENT TO ADJOINING EDGES.
3. SANDWICH: CF FACE SHEET 0.3 + WAVE-RIB CORE 10 + CF FACE SHEET 0.3 = 10.6 ±0.2, SET BY THE MOULD (SHEET 4). BODY (SHEETS + CORE) FROM y = 5 TO THE TIP; GRIP BASE y = 0 … 5.
4. FACE SHEETS (2 OFF, IDENTICAL): WOVEN CARBON/EPOXY 0.3 THK (CURED), CUT TO PB-HY-001_profile.dxf (TEMPLATE: SHEET 2), TRIMMED FLUSH WITH THE CORE EDGE.
5. RIB SUPPORT (CORE): 3D-PRINTED PA-CF IN ONE PIECE, CLOSED FRAME 6, WAVE RIB λ18 / WALL 1.6 / LANDS 4.28, SOLID TO y = 150 WITH 45° FLUTE RUN-OUT – SEE SHEET 3.
6. SHEETS LAMINATED ONTO THE CORE IN THE TWO-HALF COMPRESSION MOULD (SHEET 4): EPOXY, ABRADED + PRIMED CORE FACES, CLOSED TO THE HARD STOP.
7. STRENGTH: NOT QUALIFIED. THE HAND CHECK (analysis/hand_check.json) GIVES RF < 1 FOR THE 500 N BALL IMPACT WITH 0.3 SHEETS (HANDLE ABOVE THE GRIP, SKIN BETWEEN LANDS) – SEE THE README.
8. GRIP: PRINTED PLA GRIP (ANY OF THE TEN REV-8 DESIGNS; DRAWN: CARBON MATRIX, 61 g), LOCKED BY A DIN 7984 M3 × 12 SCREW INTO AN M3 HEAT-SET INSERT. REV-8 SLOT 16 > HANDLE 10.6: REGENERATE – PB-GR-002.
9. USA PICKLEBALL LIMITS: L + W = 580 ≤ 609.6 (24 in), L = 390 ≤ 431.8 (17 in), INCL. GRIP. AN EDGE GUARD COUNTS TOWARDS THESE LIMITS (MARGIN 29.6).
10. MASS 309 g WITH THE GRIP, BALANCE POINT 192 FROM THE BUTT (FROM THE 3D MODEL).


PICKLEBALL PADDLE – HYBRID

GENERAL ARRANGEMENT · 390 × 190 × 10.6 mm · CF / WAVE-RIB SANDWICH

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-24		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-HY-001	D	1 / 4	A3	1:2	mm

PROJECTION	MATERIAL	STATUS
	SEE NOTES	ISSUED FOR REVIEW

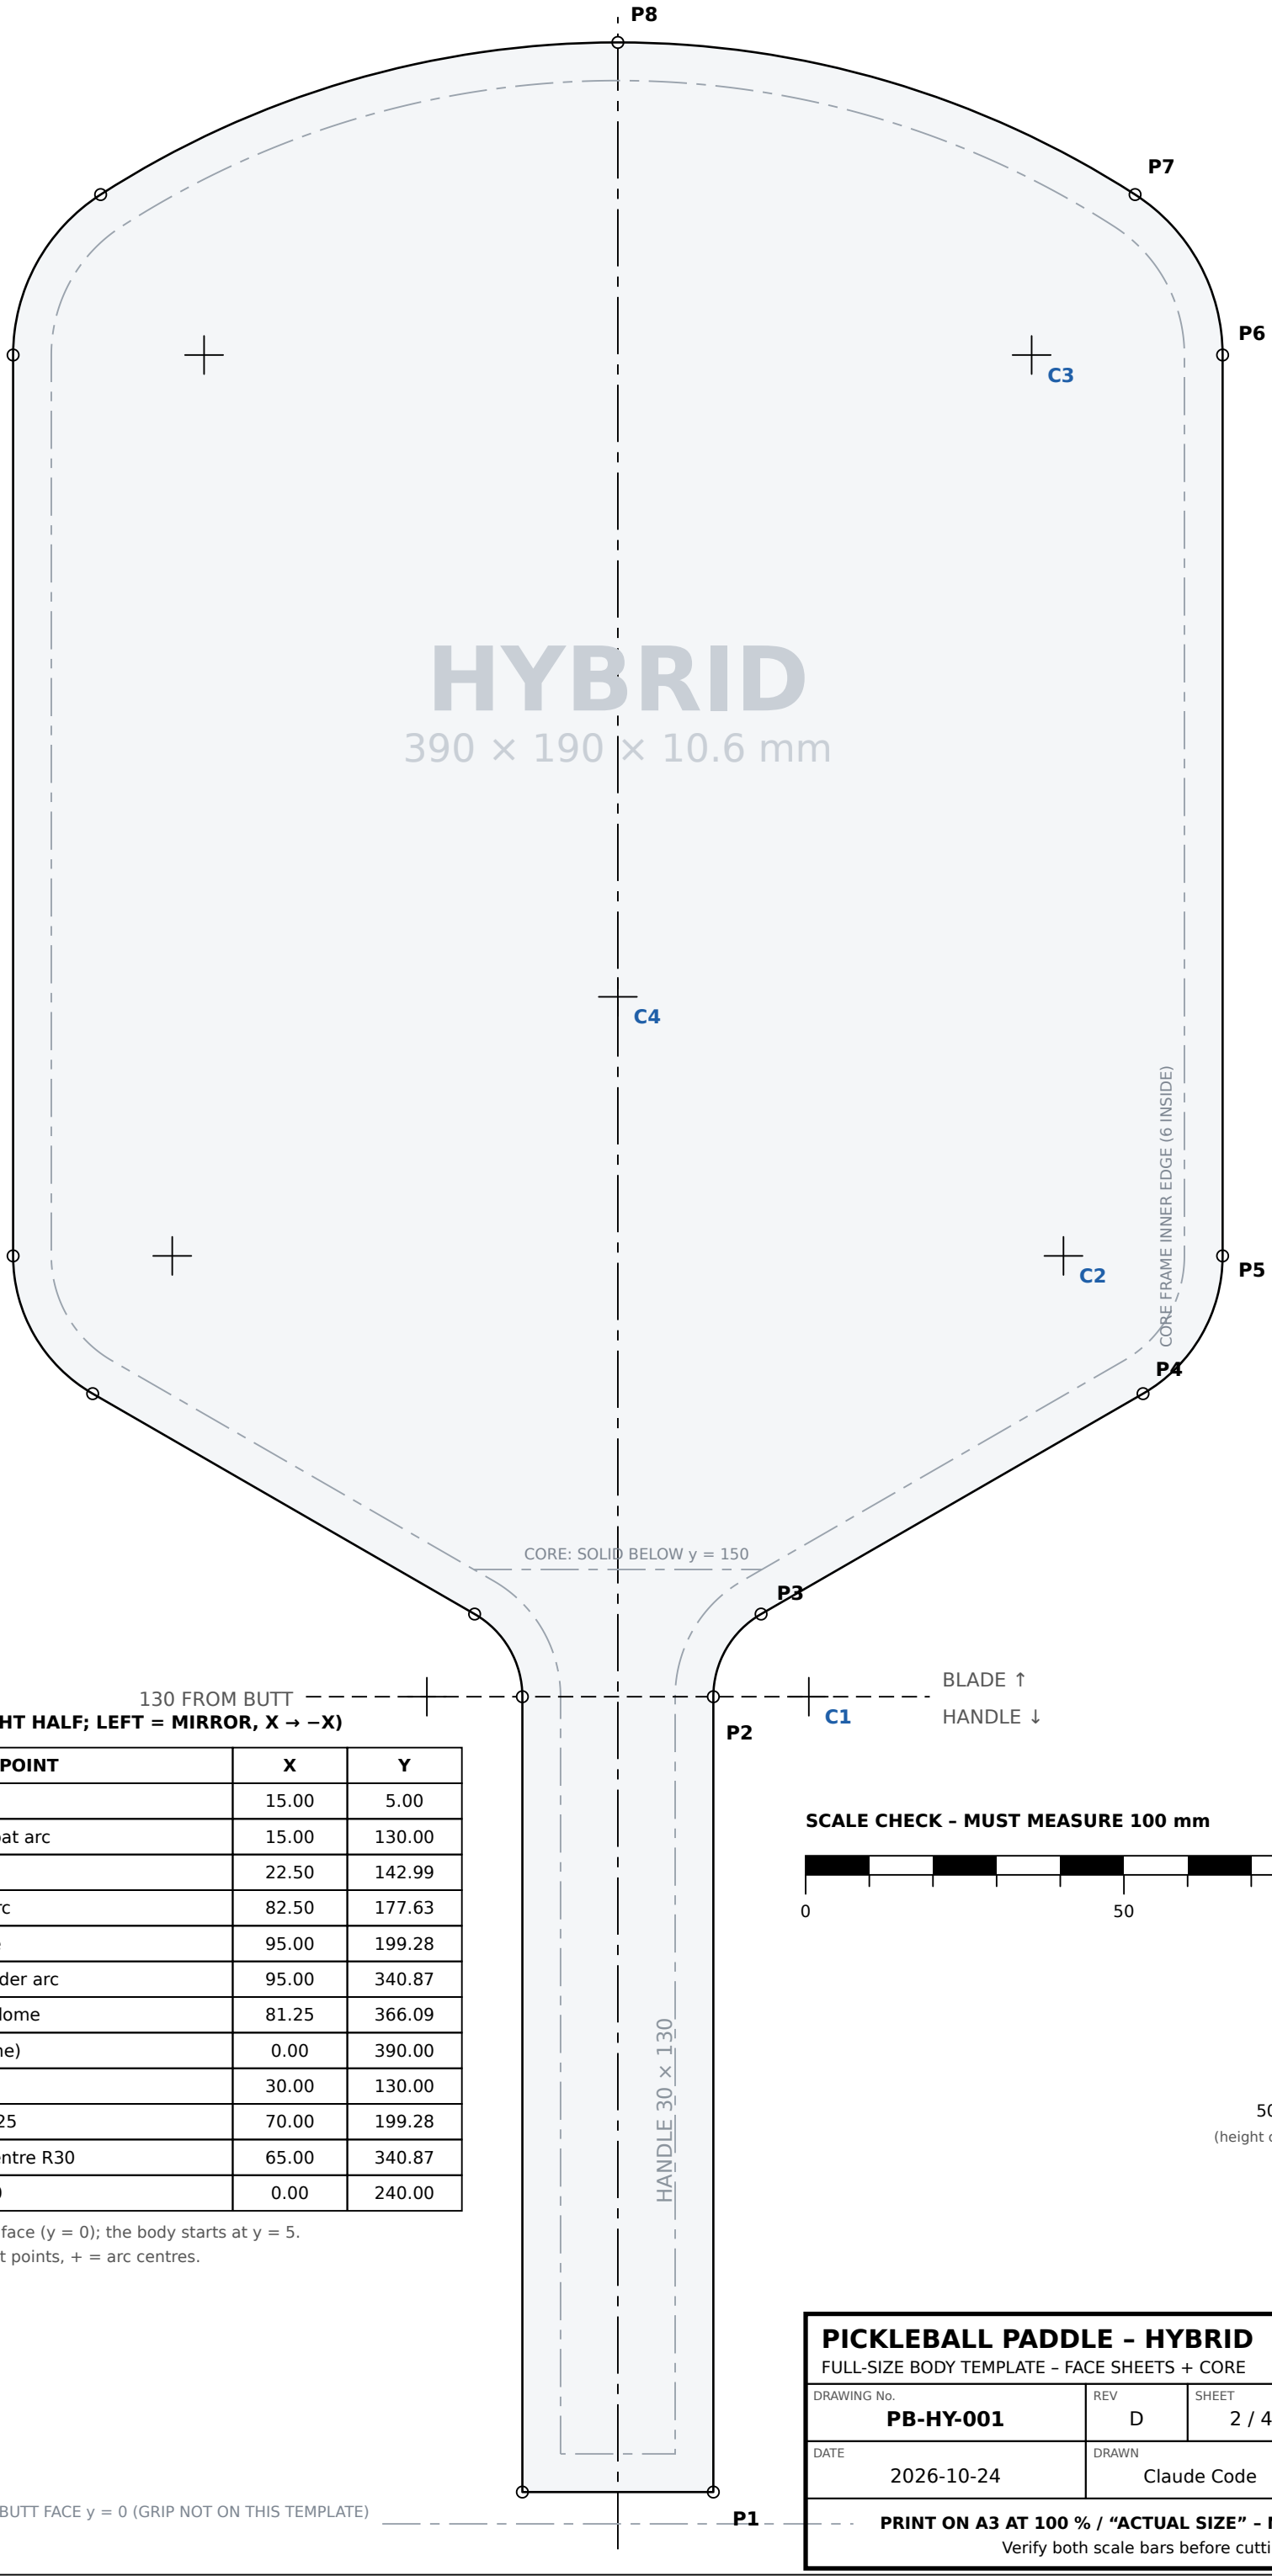



PROFILE GEOMETRY (RIGHT HALF; LEFT = MIRROR, X → −X)

ID	POINT	X	Y
P1	Butt corner	15.00	5.00
P2	Handle edge / throat arc	15.00	130.00
P3	Throat arc / taper	22.50	142.99
P4	Taper / shoulder arc	82.50	177.63
P5	Shoulder arc / side	95.00	199.28
P6	Side / crown-shoulder arc	95.00	340.87
P7	Crown shoulder / dome	81.25	366.09
P8	Apex (on centre line)	0.00	390.00
C1	Throat centre R15	30.00	130.00
C2	Shoulder centre R25	70.00	199.28
C3	Crown-shoulder centre R30	65.00	340.87
C4	Dome centre R150	0.00	240.00

Origin: centre of the grip's butt face (y = 0); the body starts at y = 5.
All arcs tangent. Dots = tangent points, + = arc centres.

SCALE CHECK – MUST MEASURE 100 mm



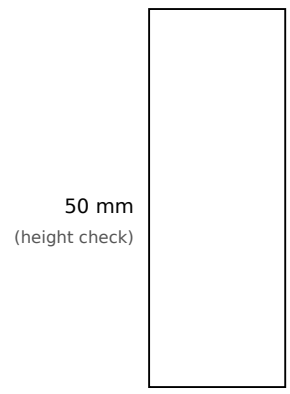


PICKLEBALL PADDLE – HYBRID

FULL-SIZE BODY TEMPLATE – FACE SHEETS + CORE


DRAWING No.	REV	SHEET	SCALE
PB-HY-001	D	2 / 4	**1:1**
DATE	DRAWN	UNITS	
2026-10-24	Claude Code	mm	

PRINT ON A3 AT 100 % / “ACTUAL SIZE” – NO FIT-TO-PAGE.
Verify both scale bars before cutting.

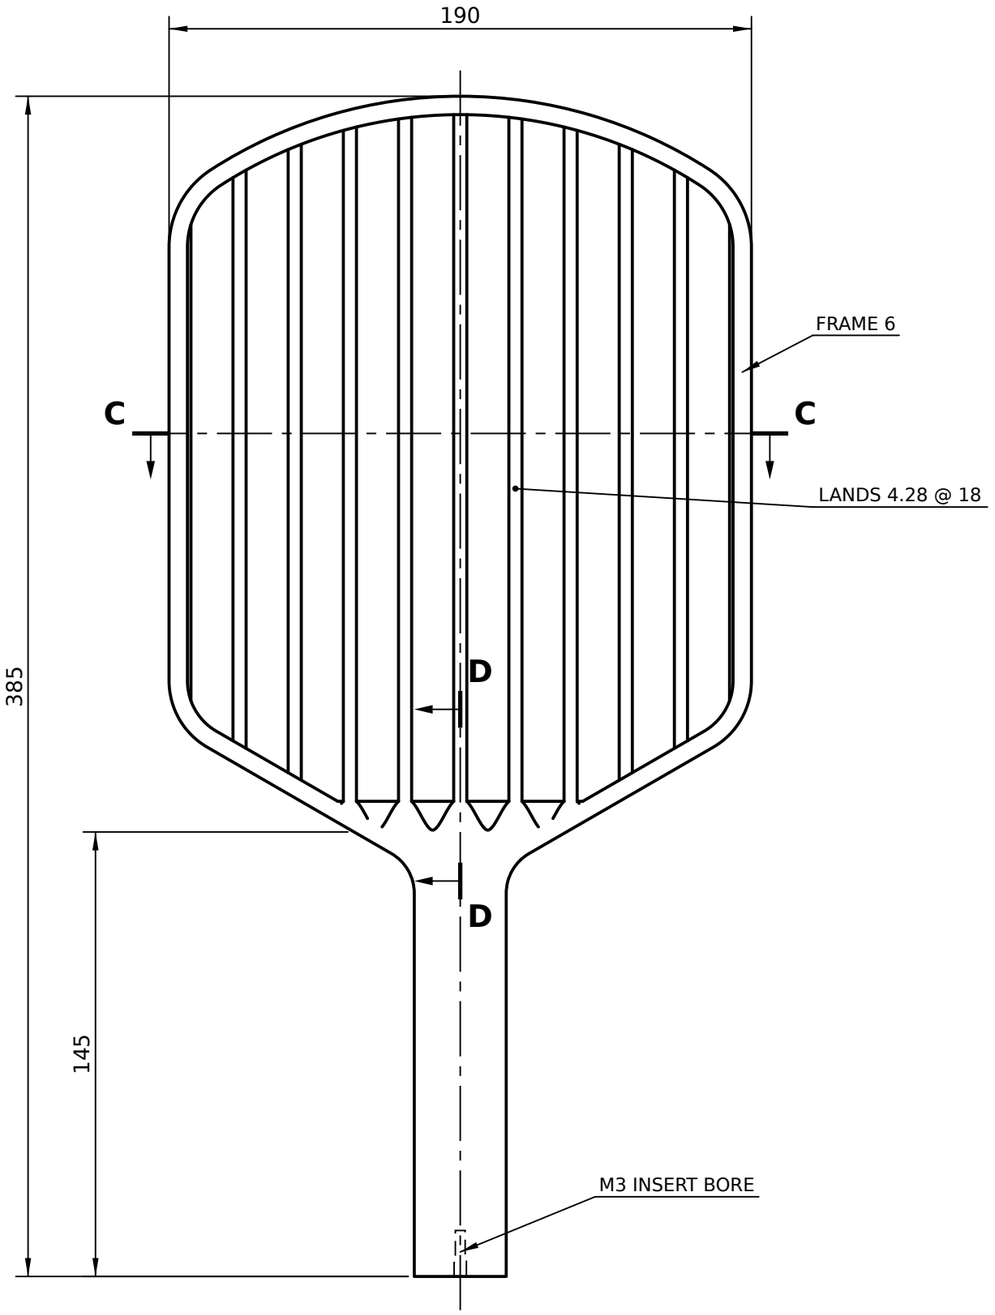


PLAN VIEW (TOP FACE)

SCALE 1:2 · BOTTOM LANDS OFFSET ½ PITCH

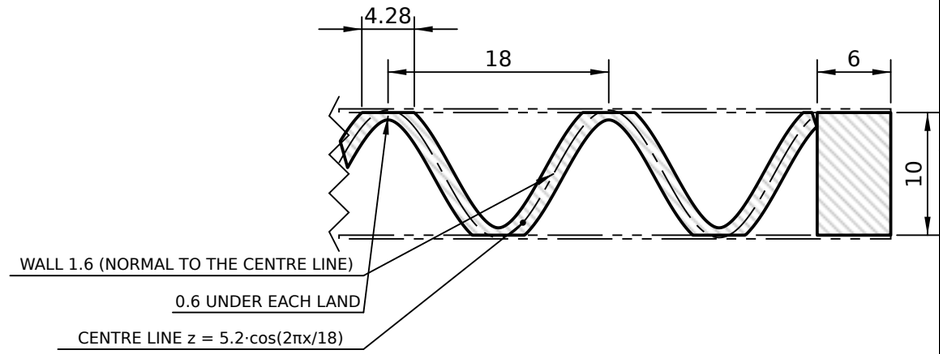

SECTION C–C (PART)

SCALE 2:1 · FACE SHEETS SHOWN PHANTOM

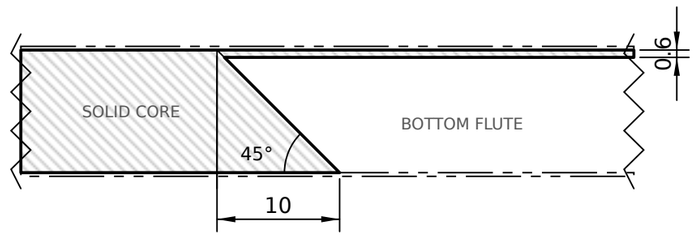

SECTION D–D (PART)

SCALE 2:1 · ON THE CENTRE LAND (x = 0), RUN-OUT FROM y = 150; TOP FLUTES MIRROR IT

NOTES

1. MATERIAL: PA-CF (CARBON-FIBRE-FILLED NYLON), E ≈ 4 GPa, ρ 1.18 g/cm³. DRY THE FILAMENT BEFORE PRINTING.
2. PRINT FLAT, 100 % SOLID: WALL 1.6 = 4 PERIMETERS (0.4 NOZZLE), 0.2 LAYERS. NO SUPPORTS (45° RUN-OUTS).
3. THICKNESS 10 ±0.1. BOTH FACES ARE BOND SURFACES, FLAT WITHIN 0.1.
4. WAVE RIB λ18, WALL 1.6, CENTRE-LINE AMPLITUDE 5.2; CRESTS CUT FLAT = LANDS 4.28 ON BOTH FACES.
5. FRAME 6, CLOSED. SOLID TO y = 150; EACH FLUTE STARTS WITH A 45° RUN-OUT, 10 LONG (D–D).
6. M3 HEAT-SET INSERT BORE Ø4 × 7 + Ø3.2 × 15 IN THE BUTT FACE (GRIP SCREW) – SEE PB-GR-002.
7. BONDING: ABRADE (P120) AND DEGREASE BOTH FACES; THE SHEETS ARE LAMINATED ON IN THE MOULD (SHEET 4).
8. PRINT FILE output/rib_support/hybrid_rib_support.stl: ONE PIECE, FLAT, BED ≥ 391 × 196.
   IT DROPS INTO THE MOULD POCKET (+0.2 CLEARANCE); PLUG THE INSERT BORE BEFORE MOULDING.
9. MASS 204 g. y FROM THE GRIP BUTT FACE (y = 0); THE RIB SUPPORT STARTS AT y = 5.


RIB SUPPORT – HYBRID

RIB SUPPORT (CORE) · 3D-PRINTED PA-CF · 385 × 190 × 10 mm

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-24		


DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-HY-001	D	3 / 4	A3	1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	PA-CF (NOTE 1)	ISSUED FOR REVIEW

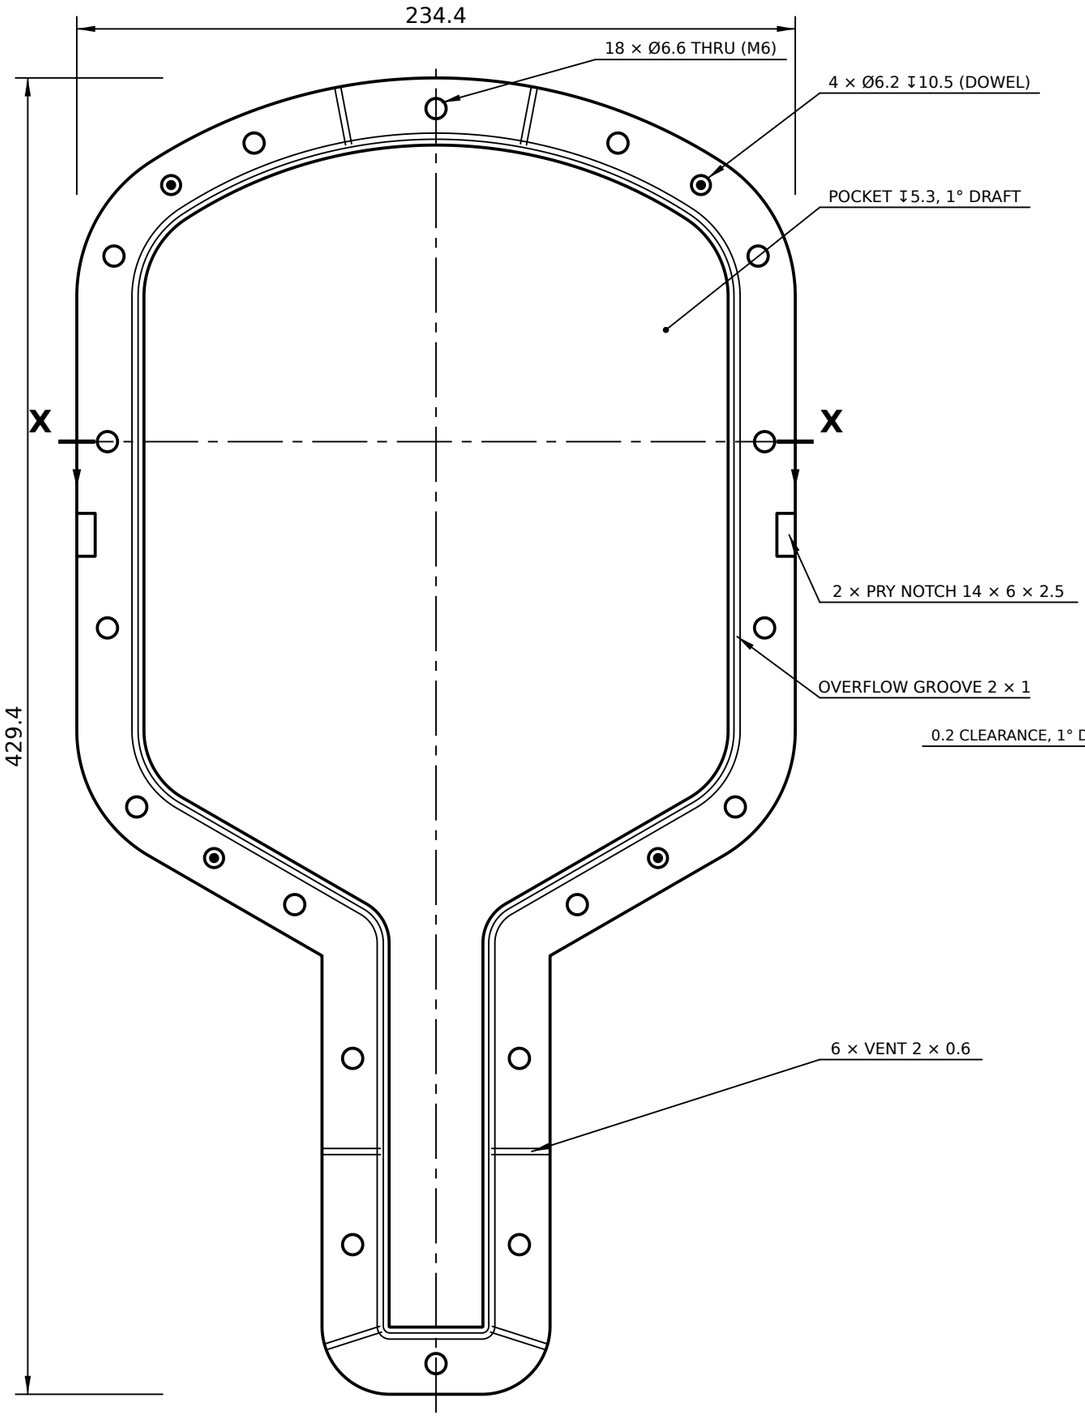


MOULD HALF – PARTING FACE

SCALE 1:2 · BOTH HALVES ARE THIS PART



SECTION X–X

SCALE 1:2 · CLOSED MOULD, SANDWICH 0.3 / 10 / 0.3, M6 BOLT

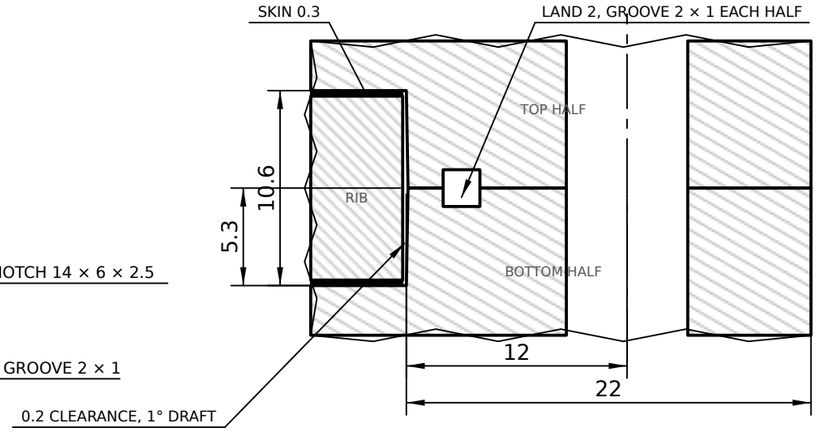

DETAIL Y

SCALE 3:1 · EDGE OF THE CLOSED MOULD AT X–X

MOULD HARDWARE

ITEM	PART	QTY
1	Mould half, hybrid_mould_half.stl (print 2)	2
2	Hex bolt M6 × 45, 2 washers, nut	18
3	Dowel pin Ø6 × 20, steel (ISO 2338)	4
4	Release wax + PVA, or release film	a/r
5	Flat platens ≥ 18 mm + clamps, or press	2

NOTES

1. MOULD HALF (1): PRINT TWICE – BOTH HALVES ARE THE SAME PART (output/mould/hybrid_mould_half.stl / .step); TURN ONE OVER ONTO THE OTHER. POCKET 5.3 DEEP IN EACH HALF = CAVITY 10.6 = SKIN 0.3 + RIB SUPPORT 10 + SKIN 0.3 WHEN THE FLANGES MEET.
2. PRINT POCKET UP, BACK ON THE BED: ≥ 5 WALLS, ≥ 40 % INFILL, 6 TOP LAYERS + IRONING ON THE POCKET FLOOR. NEEDS A ≥ 440 mm BED; OR MACHINE THE STEP FROM ALUMINIUM / HDPE. ABOUT 1.0 kg OF PLA AT 100 % INFILL.
3. PLA SOFTENS NEAR 55 °C: ROOM-TEMPERATURE-CURE EPOXY ONLY. FOR A WARM POST-CURE PRINT IN PETG, ASA OR PA-CF.
4. PREPARE: SAND THE POCKET FLOORS (P400 → P800), SEAL (EPOXY COAT OR PRIMER), WAX + PVA RELEASE, OR LINE WITH RELEASE FILM. PRESS THE 4 DOWEL PINS (3) INTO ONE HALF.
5. LAY UP IN THE BOTTOM HALF: SKIN (CUT TO THE PROFILE, 0.5 UNDERSIZE), WET OUT → RIB SUPPORT (FACES ABRADED, M3 INSERT FITTED, SCREW IN IT) → TOP SKIN, WET OUT → TOP HALF OVER THE DOWELS. THE POCKET LOCATES THE RIB SUPPORT (+0.2).
6. CLOSE: BOLTS (2) FINGER-TIGHT, THEN PRESS THE MOULD BETWEEN 2 FLAT, STIFF PLATENS (≥ 18 mm PLY OR ALUMINIUM, CLAMPS EVERY ~100 mm), IN A PRESS OR IN A VACUUM BAG UNTIL THE FLANGES MEET; THEN TIGHTEN THE BOLTS. BOLTS ALONE BOW A PRINTED MOULD AND CANNOT PRESS THE MIDDLE OF THE BLADE.
7. EXCESS RESIN FILLS THE OVERFLOW GROOVE (2 × 1 IN EACH HALF) AND LEAVES BY THE 6 VENTS. CURE, SPLIT AT THE PRY NOTCHES, TRIM THE FLASH AT THE EDGE.
8. MEASURE THE RIB SUPPORT (10 ±0.1) BEFORE MOULDING; SAND THE LANDS IF THICK. SHIM THE FLANGE (TAPE / FOIL) TO OPEN THE CAVITY, E.G. FOR PRE-CURED SKINS AND GLUE LINES.


COMPRESSION MOULD – HYBRID

TWO-HALF COMPRESSION MOULD · CAVITY 10.6 mm · 234.4 × 429.4 × 15.3 mm PER HALF

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-24		


DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-HY-001	D	4 / 4	A3	1:2, 3:1	mm

PROJECTION	MATERIAL	STATUS
	PLA / PETG (NOTE 2)	ISSUED FOR REVIEW

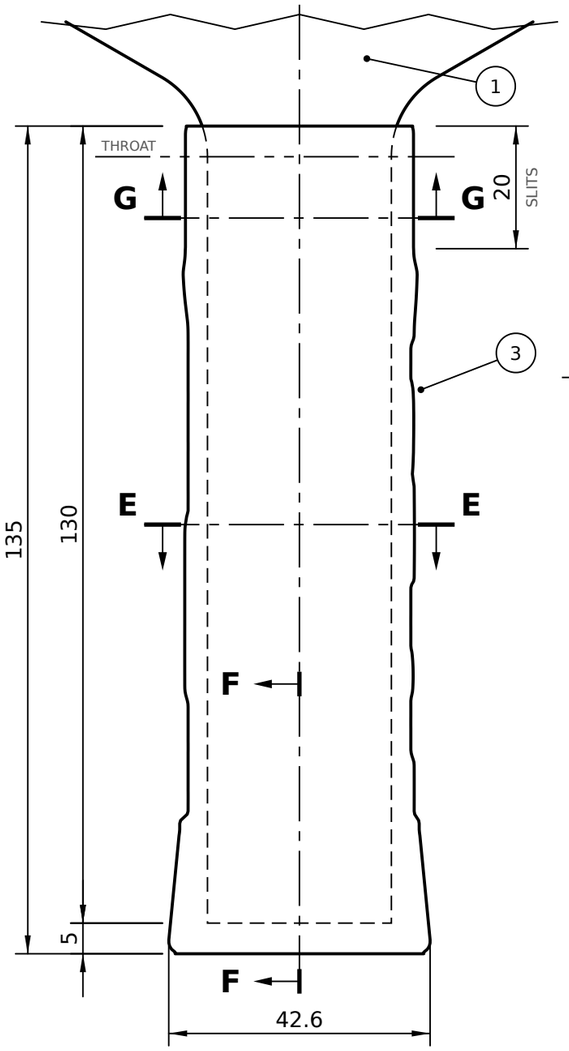


HANDLE IN THE GRIP (FACE VIEW)

SCALE 1:1 · DRAWN: CARBON MATRIX

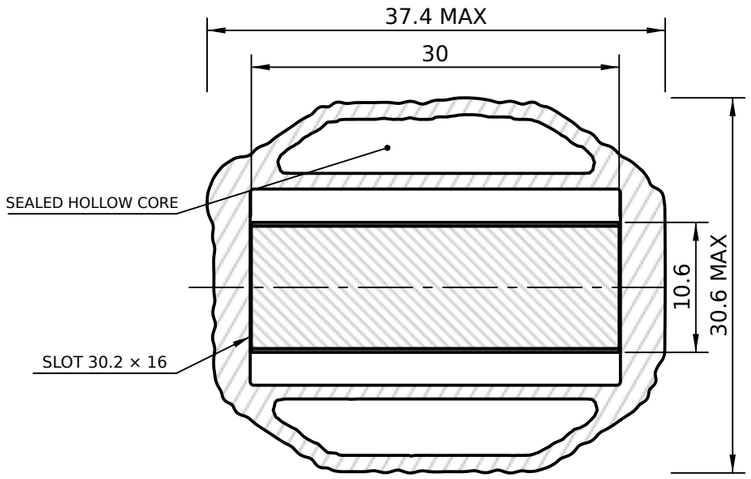


SECTION E–E

SCALE 2:1

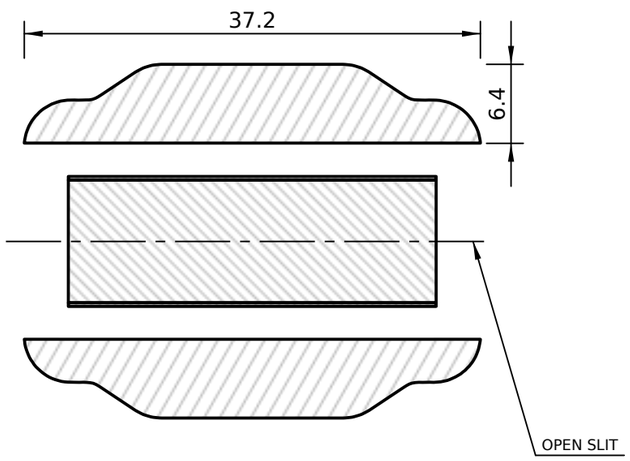


SECTION G–G

SCALE 2:1 · HEAD, IN THE SLIT ZONE (y = 120)

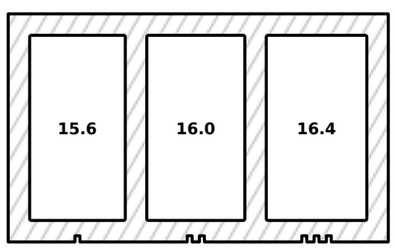

FIT-TEST COUPON (fit_test_slot.stl)

SCALE 1:1 · 8 THK · REV-8 SLOTS 15.6 / 16.0 / 16.4 × 30.2

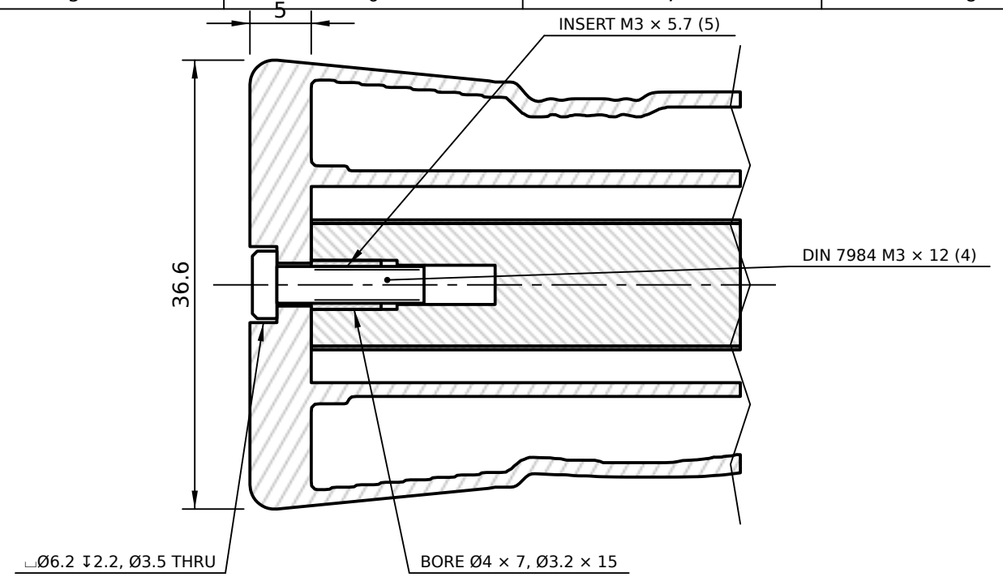

SECTION F–F (BUTT END)

SCALE 2:1

ITEM	PART	MATERIAL / SPECIFICATION	QTY	MASS g EL / HY
1	Face sheet	Woven carbon/epoxy 0.3 thk, cut to the profile DXF	2	23 / 21
2	Rib support	PA-CF printed in one piece – sheet 3 of PB-EL-001 / PB-HY-001	1	214 / 204
3	Grip	PLA printed, rev 8 (drawn CARBON MATRIX), slot: note 2	1	61
4	Screw	DIN 7984 M3 × 12 low-head cap screw, A2 stainless	1	1.0
5	Threaded insert	M3 heat-set, brass, 5.7 long, in a Ø4 bore	1	0.4
6	Adhesive	Laminating epoxy, sheets onto the rib support in the mould	a/r	–
COMPLETE PADDLE WITH GRIP (3D MODEL)				**323 / 309**

NOTES

1. GRIP (3): ANY OF THE TEN REV-8 PRINTED GRIPS (pickleball_grips) - SAME INTERFACE, DIFFERENT SURFACE; DRAWN: CARBON MATRIX. PLA 60–65 g (61.2 g DRAWN). PRINT UPRIGHT, BUTT DOWN, 100 % INFILL, NO SUPPORTS.
2. REV-8 SLOT 30.2 × 16 × 130 DEEP, 1 LEAD-IN; HANDLE 30 × 10.6 (0.3 / 10 / 0.3, MOULDED) = 5.4 LOOSE. REGENERATE THE GRIPS WITH SLOT_T = 10.6 (pickleball_grips/scripts/grip_core.py) AND THE COUPON AT 10.2 / 10.6 / 11.
3. END WALLS SLIT OVER THE TOP 20 (y 115–135) SO THE THROAT FLARE (FROM y = 130) PASSES; THE GRIP SEATS ON THE BODY BUTT AT y = 5 (= GRIP BASE 5).
4. INSERT (5): HEAT-SET M3 × 5.7 INTO THE Ø4 BORE, FLUSH WITH THE CORE BUTT, BEFORE MOULDING; KEEP A SCREW IN IT SO NO RESIN GETS IN.
5. SCREW (4): DIN 7984 M3 × 12 LOW-HEAD (M3 × 16 ALSO FITS), LOW-STRENGTH THREADLOCKER, HAND-TIGHT (≈0.5 N·m) SO THE PLA BASE DOES NOT CRACK; 2.8 OF FLOOR UNDER THE HEAD.
6. OVERALL LENGTH 390 INCL. THE 5 GRIP BASE; HANDLE 130 FROM THE BUTT TO THE THROAT. MASS WITH GRIP 323 / 309 g (EL / HY).
7. SAME GRIP ON PB-EL-001 AND PB-HY-001. ALL DIMENSIONS IN mm.

PRINTED GRIP – PADDLE INTERFACE

PRINTED GRIP 135 LONG, SLOT 30.2 × 16 · M3 LOW-HEAD SCREW + HEAT-SET INSERT · BOTH PADDLES

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-10-24		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-GR-002	D	1 / 1	A3	1:1, 2:1	mm

PROJECTION	MATERIAL	STATUS
	SEE BOM	ISSUED FOR REVIEW