

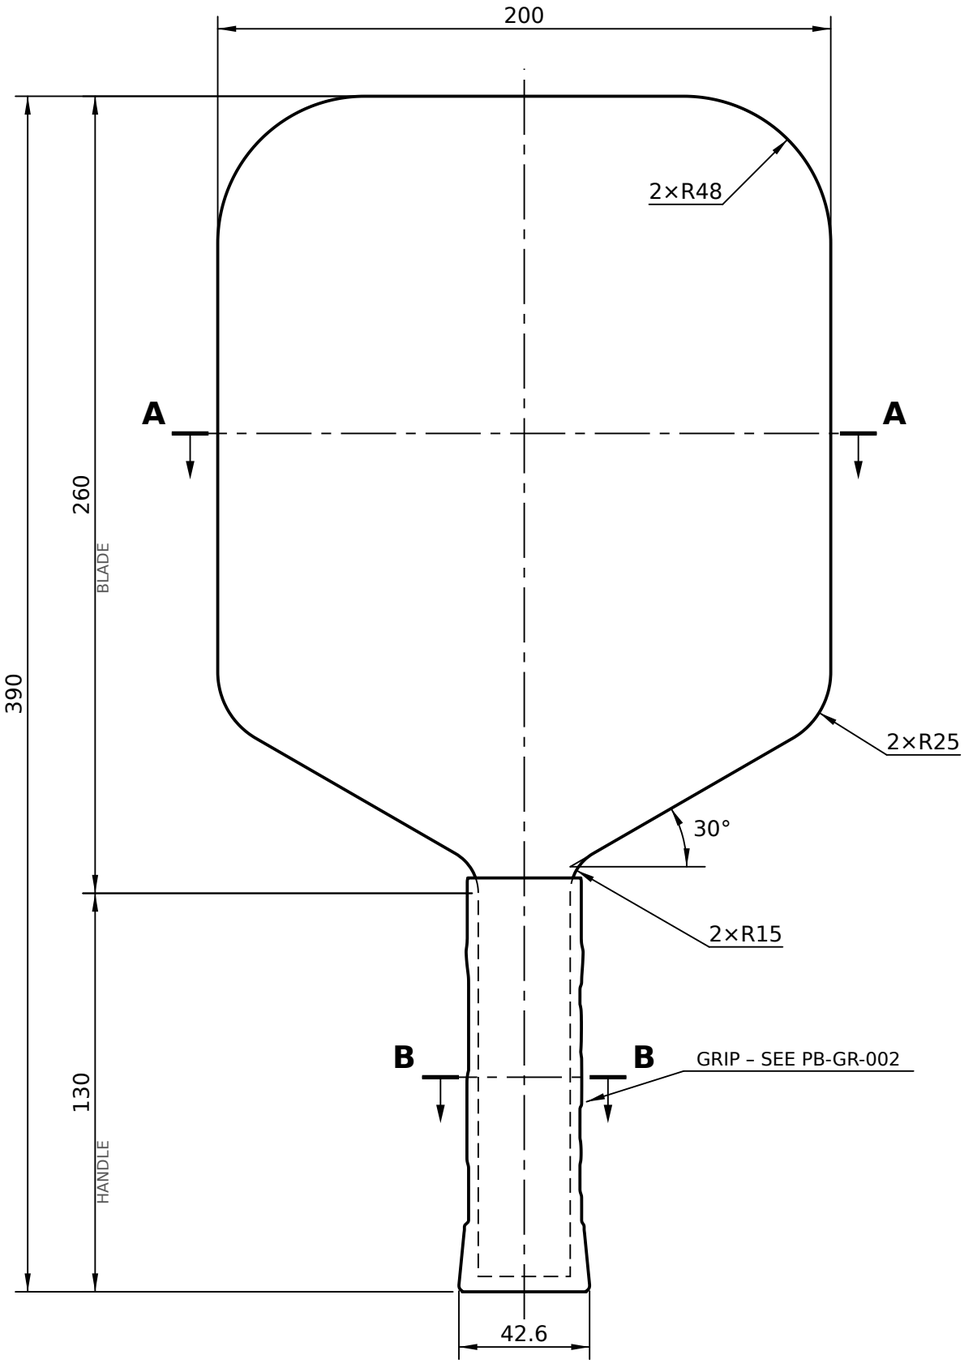


FRONT VIEW




SIDE VIEW

LAY-UP 0.3/10/0.3

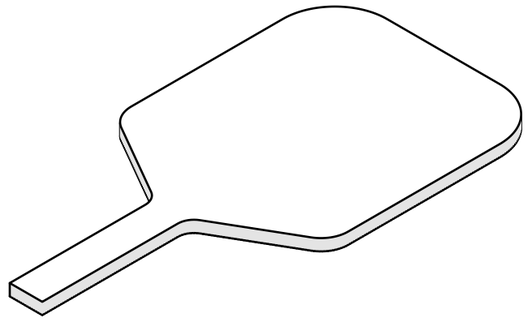


ISOMETRIC VIEW

SCALE 1:4 (BODY ONLY)



SECTION A–A

SCALE 1:2 · CF 0.3 / WAVE-RIB CORE 10 / CF 0.3 · CORE DETAIL: SHEET 3



SECTION B–B

SCALE 1:1 · REV-8 GRIP, SLOT 16: PB-GR-002

NOTES

1. ALL DIMENSIONS IN MILLIMETRES. DO NOT SCALE THE DRAWING. UNLESS STATED: LINEAR ±0.5, ANGULAR ±0.5°.
2. PROFILE SYMMETRICAL ABOUT THE CENTRE LINE. ALL ARCS TANGENT TO ADJOINING EDGES.
3. SANDWICH: CF FACE SHEET 0.3 + WAVE-RIB CORE 10 + CF FACE SHEET 0.3 = 10.6 ±0.2, UNIFORM OVER BLADE AND HANDLE. BODY (SHEETS + CORE) FROM y = 5 TO THE TIP; GRIP BASE y = 0 … 5.
4. FACE SHEETS (2 OFF, IDENTICAL): WOVEN CARBON/EPOXY 0.3 THK (CURED), CUT TO PB-EL-001_profile.dxf (TEMPLATE: SHEET 2), TRIMMED FLUSH WITH THE CORE EDGE.
5. RIB SUPPORT (CORE): CARBON FIBRE MOULDED IN ONE PIECE IN THE TWO-HALF WAVE MOULD (SHEET 4), CLOSED FRAME 6, WAVE RIB λ23.5 / WALL 1.6 / LANDS 5.27, SOLID TO y = 150, 45° FLUTE RAMPS – SEE SHEET 3.
6. SKINS BONDED TO THE CORE: EPOXY, ABRADED + PRIMED FACES, PRESSED FLAT BETWEEN PLATENS OR IN A VACUUM BAG.
7. STRENGTH: NOT QUALIFIED BY FEA. HAND CHECK (analysis/hand_check.json, README): THE 0.3 SKINS FAIL A TIP HIT (SKIN BUCKLING BETWEEN THE LANDS, HANDLE SKIN, CORE); 0.6 SKINS PASS.
8. GRIP: PRINTED PLA GRIP (ANY OF THE TEN REV-8 DESIGNS; DRAWN: CARBON MATRIX, 61 g), LOCKED BY A DIN 7984 M3 × 12 SCREW INTO A BONDED M3 INSERT. REV-8 SLOT 16 > HANDLE 10.6: REGENERATE – PB-GR-002.
9. USA PICKLEBALL LIMITS: L + W = 590 ≤ 609.6 (24 in), L = 390 ≤ 431.8 (17 in), INCL. GRIP. AN EDGE GUARD COUNTS TOWARDS THESE LIMITS (MARGIN 19.6).
10. MASS 358 g WITH THE GRIP, BALANCE POINT 198 FROM THE BUTT (FROM THE 3D MODEL).


PICKLEBALL PADDLE – ELONGATED

GENERAL ARRANGEMENT · 390 × 200 × 10.6 mm · CF / WAVE-RIB SANDWICH

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-11-09		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	F	1 / 4	A3	1:2	mm

PROJECTION	MATERIAL	STATUS
	SEE NOTES	ISSUED FOR REVIEW

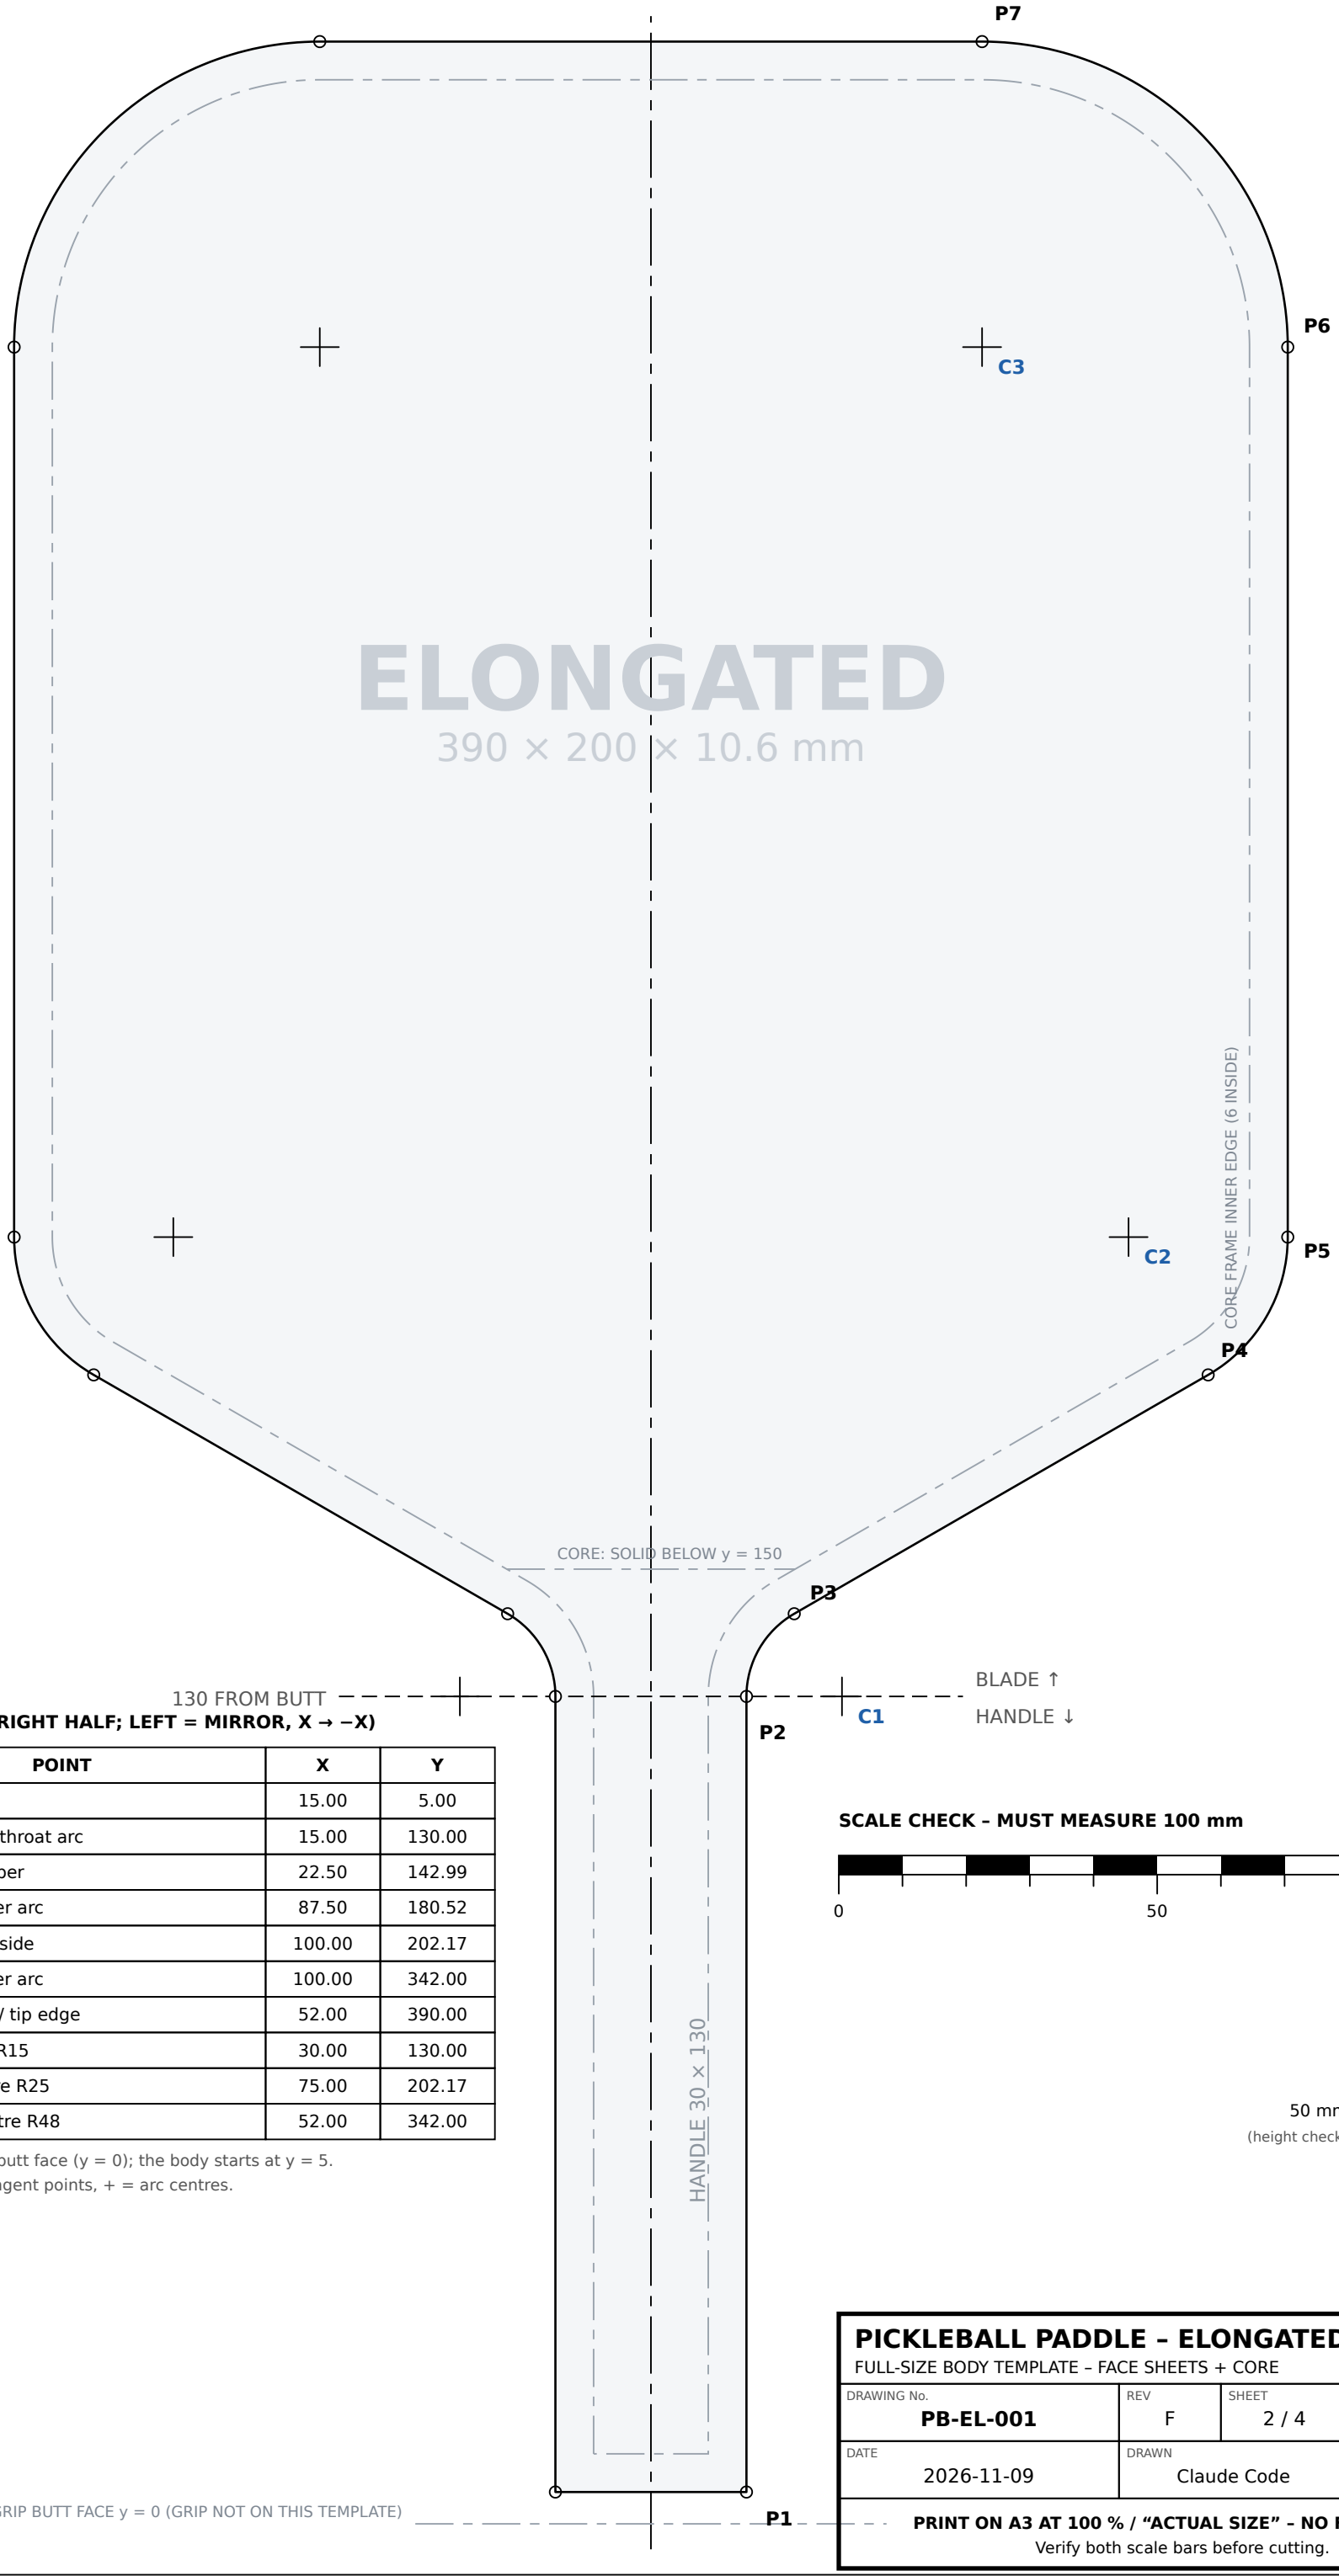

PROFILE GEOMETRY (RIGHT HALF; LEFT = MIRROR, X → −X)

ID	POINT	X	Y
P1	Butt corner	15.00	5.00
P2	Handle edge / throat arc	15.00	130.00
P3	Throat arc / taper	22.50	142.99
P4	Taper / shoulder arc	87.50	180.52
P5	Shoulder arc / side	100.00	202.17
P6	Side / tip-corner arc	100.00	342.00
P7	Tip-corner arc / tip edge	52.00	390.00
C1	Throat centre R15	30.00	130.00
C2	Shoulder centre R25	75.00	202.17
C3	Tip-corner centre R48	52.00	342.00

Origin: centre of the grip's butt face (y = 0); the body starts at y = 5.
All arcs tangent. Dots = tangent points, + = arc centres.

SCALE CHECK – MUST MEASURE 100 mm

0 50 100 mm


50 mm
(height check)

PICKLEBALL PADDLE – ELONGATED

FULL-SIZE BODY TEMPLATE – FACE SHEETS + CORE


DRAWING No.	REV	SHEET	SCALE
PB-EL-001	F	2 / 4	**1:1**
DATE	DRAWN	UNITS	
2026-11-09	Claude Code	mm	

PRINT ON A3 AT 100 % / “ACTUAL SIZE” – NO FIT-TO-PAGE.
Verify both scale bars before cutting.

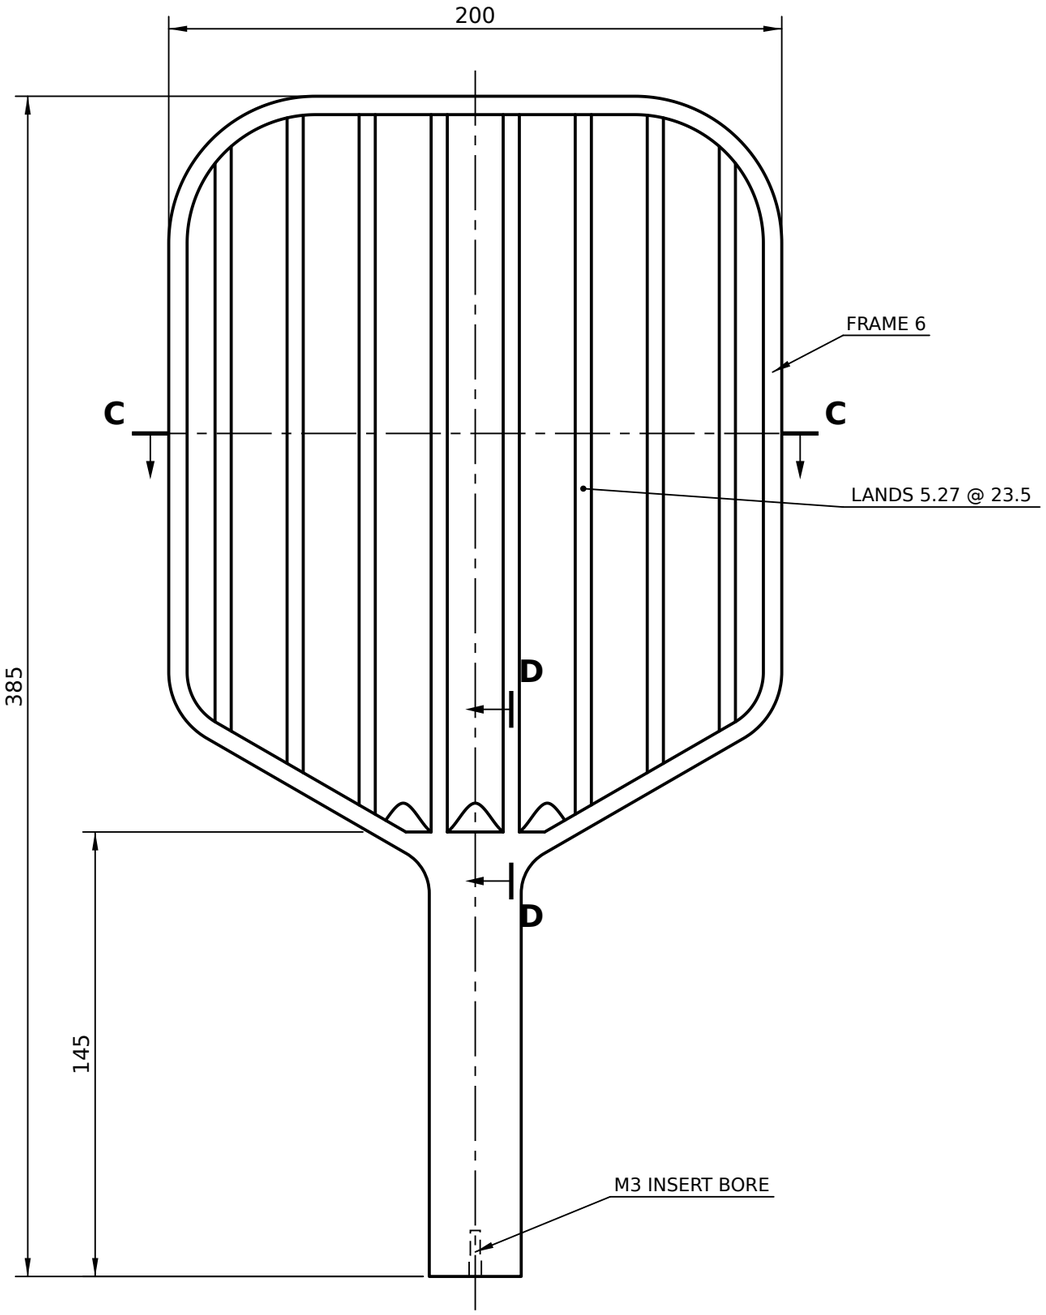


PLAN VIEW (TOP FACE)

SCALE 1:2 · BOTTOM LANDS OFFSET ½ PITCH

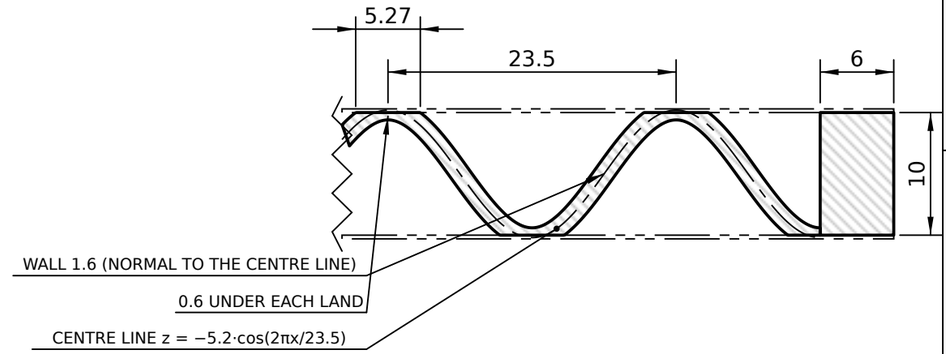

SECTION C–C (PART)

SCALE 2:1 · FACE SHEETS SHOWN PHANTOM

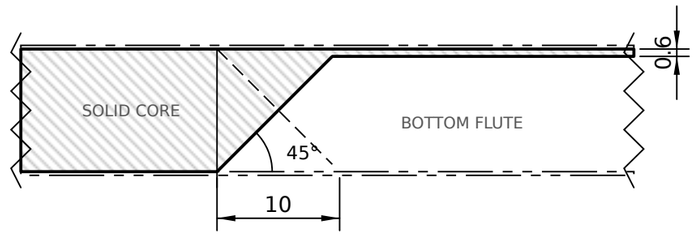

SECTION D–D (PART)

SCALE 2:1 · ON A LAND (x = 11.75), RAMP FROM y = 150; TOP FLUTES MIRROR IT

NOTES

1. MATERIAL: CARBON FIBRE / EPOXY, MOULDED IN ONE PIECE IN THE SHEET-4 MOULD (CHOPPED FIBRE 10–25 LONG, ≈ 40 % BY VOLUME, ρ ≈ 1.5 g/cm³). THE PRINTED STL (NOTE 8) IS A TRIAL PIECE / PRINTED ALTERNATIVE.
2. THICKNESS 10, SET BY THE MOULD: THE LID FLANGE SEATS ON THE TRAY RIM WITH THE PLUG FACE 10 ABOVE THE POCKET FLOOR (SHEET 4). BOTH FACES ARE BOND SURFACES.
3. WAVE RIB λ23.5 (8 WAVES ACROSS, CRESTS SYMMETRIC ABOUT THE CENTRE LINE), WALL 1.6, CENTRE-LINE AMPLITUDE 5.2; CRESTS CUT FLAT = LANDS 5.27 ON BOTH FACES.
4. FRAME 6, CLOSED. SOLID TO y = 150; EACH FLUTE ENDS IN A 45° RAMP, 10 LONG, LONGEST AT ITS OPEN FACE (D–D), SO THE MOULD TEETH PULL STRAIGHT OUT.
5. AFTER MOULDING DRILL Ø4 × 7 + Ø3.2 × 15 IN THE BUTT FACE AND BOND AN M3 BRASS INSERT (EPOXY) FOR THE GRIP SCREW – SEE PB-GR-002.
6. BONDING THE SKINS: ABRADE (P120) AND DEGREASE BOTH FACES, EPOXY, PRESS FLAT BETWEEN PLATENS OR IN A VACUUM BAG.
7. PRINT FILE output/rib_support/elongated_rib_support.stl (TRIAL PIECE: CHECKS THE MOULD CLOSES): FLAT, BED ≥ 391 × 206.
8. MESH 200 × 200 × 10 mm, THE BUTT FACE (y = 0) ON THE BED; SUPPORT STARTS AT y = 5.


RIB SUPPORT – ELONGATED

RIB SUPPORT (CORE) · MOULDED CARBON, ONE PIECE · 385 × 200 × 10 mm

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-11-09		


DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	F	3 / 4	A3	1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	CARBON / EPOXY (NOTE 1)	ISSUED FOR REVIEW

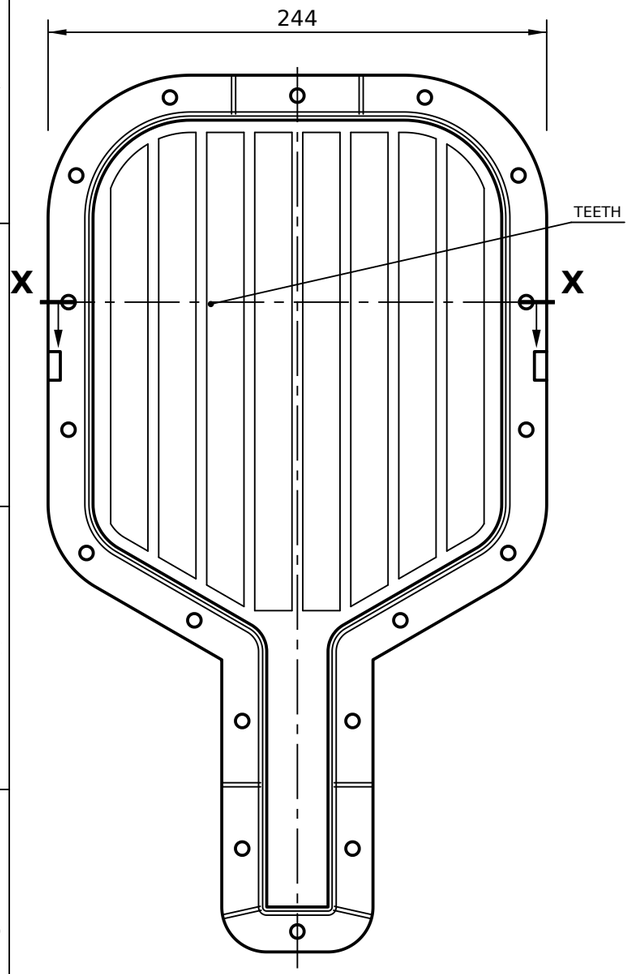


TRAY (BOTTOM HALF)

SCALE 1:3 · TEETH = BOTTOM FLUTES

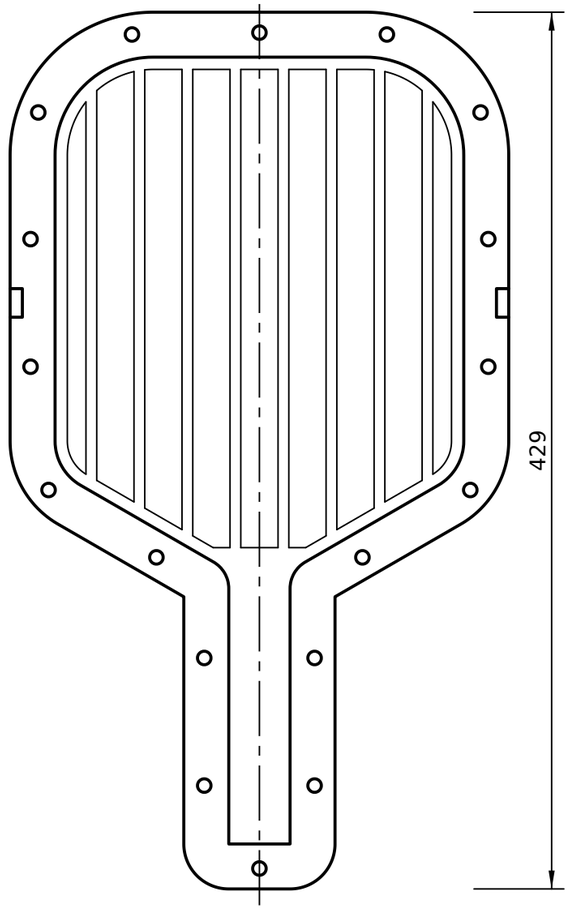


LID, UNDERSIDE

SCALE 1:3 · PLUG 2 HIGH · TEETH = TOP FLUTES

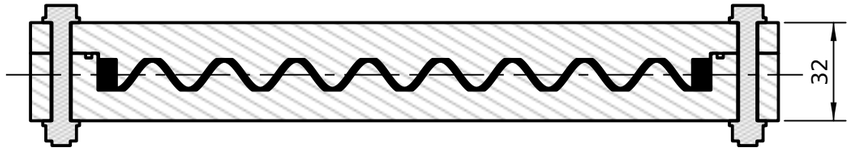

SECTION X–X

SCALE 1:2 · CLOSED MOULD, MOULDED RIB SUPPORT BLACK, M6 BOLT

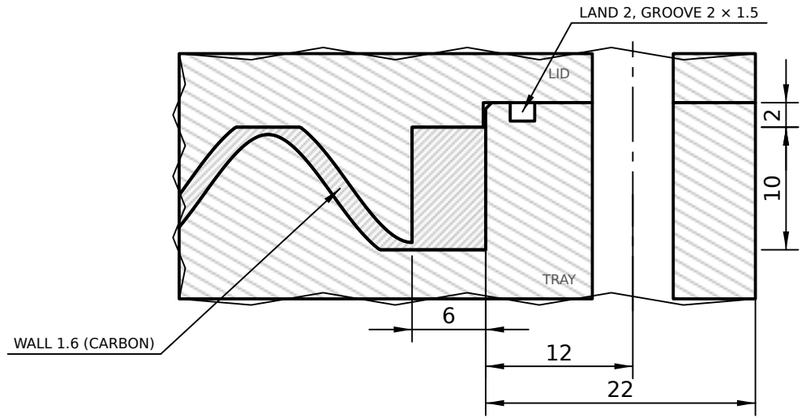

DETAIL Y

SCALE 2:1 · PLUG IN THE POCKET, 0.2 GAP PER SIDE · THE GAPS ARE THE WALLS AND THE FRAME

NOTES

1. TRAY (1) + LID (2): output/mould/elongated_mould_bottom / _top (.stl / .step). THE CAVITY BETWEEN THEM IS THE RIB SUPPORT (SHEET 3); THE TEETH ARE ITS FLUTES. CORE HEIGHT 10, WALLS 1.6.
2. THE LID'S 2 PLUG SLIDES INTO THE POCKET (0.2 CLEARANCE PER SIDE) AND ALIGNS THE HALVES; THE LID FLANGE SEATING ON THE TRAY RIM LEAVES THE PLUG FACE 10 ABOVE THE POCKET FLOOR.
3. PRINT BOTH BACK DOWN, TEETH UP: ≥ 5 WALLS, ≥ 40 % INFILL, 0.12–0.16 LAYERS FOR THE TEETH. NEEDS A ≥ 440 mm BED, OR MACHINE THE STEP FROM ALUMINIUM. ABOUT 1.5 + 1.2 kg OF PLA AT 100 %.
4. PLA SOFTENS NEAR 55 °C: ROOM-TEMPERATURE-CURE EPOXY ONLY. FOR A WARM CURE PRINT IN PETG, ASA OR PA-CF.
5. DRY FIT FIRST: THE PLUG MUST SLIDE IN BY HAND (SAND IT IF IT BINDS), AND ON THE TRIAL RIB SUPPORT STL PRINTED IN PLA THE FLANGE MUST SEAT FULLY. THEN SAND THE CAVITY (P400 → P800), SEAL, WAX ×3 + PVA.
6. FILL (FORGED CARBON) ≈ 275 g: HALF CHOPPED CARBON TOW (10–25 mm), HALF EPOXY BY MASS. PACK THE WALL GAPS AND THE FRAME FIRST, THEN THE SOLID HANDLE ZONE, AND SPREAD THE REST EVENLY. THE OPEN TRAY HOLDS 2.6× THE PART.
7. CLOSE: LID ON, BOLTS (3) FINGER-TIGHT, PRESS BETWEEN 2 FLAT, STIFF PLATENS OR IN A PRESS UNTIL THE FLANGE SEATS; TIGHTEN THE BOLTS. EXCESS RESIN RISES PAST THE PLUG INTO THE OVERFLOW GROOVE AND OUT OF THE VENTS.
8. CURE (24 h AT ROOM TEMPERATURE), SPLIT AT THE PRY NOTCHES, LIFT THE LID STRAIGHT UP, EASE THE PART OUT FROM THE BUTT END WITH A PLASTIC WEDGE (NO EJECTOR HOLES). TRIM THE FLASH, DRILL AND FIT THE M3 INSERT (SHEET 3). THE PART WEIGHS ≈ 250 g.

MOULD HARDWARE

ITEM	PART	QTY
1	Tray, elongated_mould_bottom.stl	1
2	Lid, elongated_mould_top.stl	1
3	Hex bolt M6 × 45, 2 washers, nut	18
4	Release wax + PVA; flat platens + clamps or a press	a/r


RIB SUPPORT MOULD – ELONGATED

RIB SUPPORT MOULD · TRAY + LID WITH PLUG, TEETH INTERLOCK · 244 × 429 mm


DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-11-09		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	F	4 / 4	A3	1:3, 1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	PLA / PETG (NOTE 2)	ISSUED FOR REVIEW

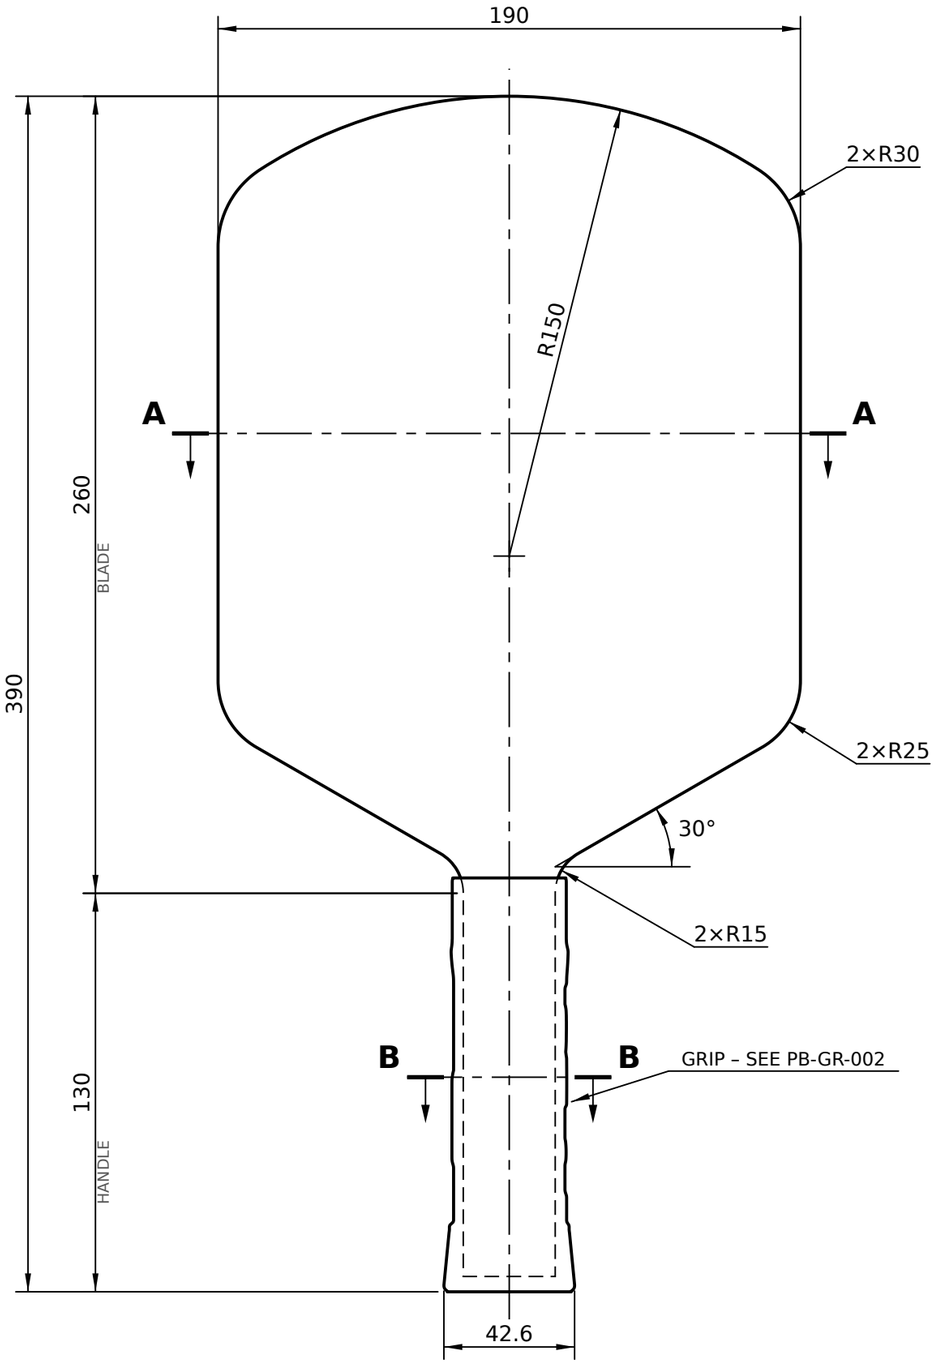


FRONT VIEW

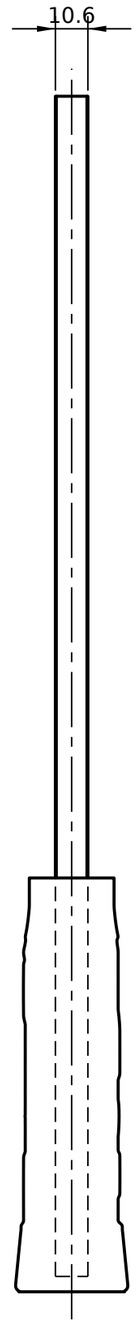


SIDE VIEW

LAY-UP 0.3/10/0.3

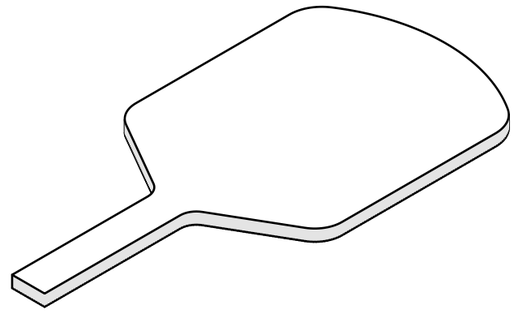


ISOMETRIC VIEW

SCALE 1:4 (BODY ONLY)

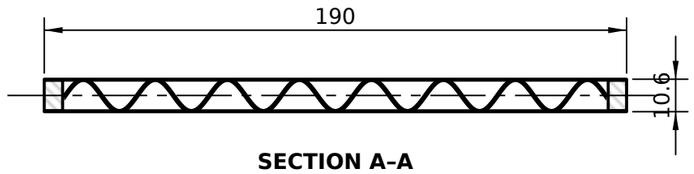

SECTION A–A

SCALE 1:2 · CF 0.3 / WAVE-RIB CORE 10 / CF 0.3 · CORE DETAIL: SHEET 3

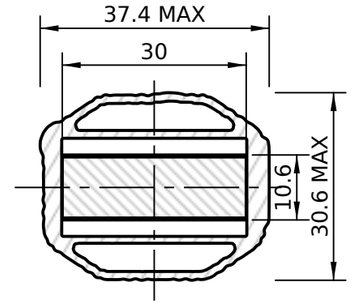

SECTION B–B

SCALE 1:1 · REV-8 GRIP, SLOT 16: PB-GR-002

NOTES

1. ALL DIMENSIONS IN MILLIMETRES. DO NOT SCALE THE DRAWING. UNLESS STATED: LINEAR ±0.5, ANGULAR ±0.5°.
2. PROFILE SYMMETRICAL ABOUT THE CENTRE LINE. ALL ARCS TANGENT TO ADJOINING EDGES.
3. SANDWICH: CF FACE SHEET 0.3 + WAVE-RIB CORE 10 + CF FACE SHEET 0.3 = 10.6 ±0.2, UNIFORM OVER BLADE AND HANDLE. BODY (SHEETS + CORE) FROM y = 5 TO THE TIP; GRIP BASE y = 0 … 5.
4. FACE SHEETS (2 OFF, IDENTICAL): WOVEN CARBON/EPOXY 0.3 THK (CURED), CUT TO PB-HY-001_profile.dxf (TEMPLATE: SHEET 2), TRIMMED FLUSH WITH THE CORE EDGE.
5. RIB SUPPORT (CORE): CARBON FIBRE MOULDED IN ONE PIECE IN THE TWO-HALF WAVE MOULD (SHEET 4), CLOSED FRAME 6, WAVE RIB λ23.5 / WALL 1.6 / LANDS 5.27, SOLID TO y = 150, 45° FLUTE RAMPS – SEE SHEET 3.
6. SKINS BONDED TO THE CORE: EPOXY, ABRADED + PRIMED FACES, PRESSED FLAT BETWEEN PLATENS OR IN A VACUUM BAG.
7. STRENGTH: NOT QUALIFIED BY FEA. HAND CHECK (analysis/hand_check.json, README): THE 0.3 SKINS FAIL A TIP HIT (SKIN BUCKLING BETWEEN THE LANDS, HANDLE SKIN, CORE); 0.6 SKINS PASS.
8. GRIP: PRINTED PLA GRIP (ANY OF THE TEN REV-8 DESIGNS; DRAWN: CARBON MATRIX, 61 g), LOCKED BY A DIN 7984 M3 × 12 SCREW INTO A BONDED M3 INSERT. REV-8 SLOT 16 > HANDLE 10.6: REGENERATE – PB-GR-002.
9. USA PICKLEBALL LIMITS: L + W = 580 ≤ 609.6 (24 in), L = 390 ≤ 431.8 (17 in), INCL. GRIP. AN EDGE GUARD COUNTS TOWARDS THESE LIMITS (MARGIN 29.6).
10. MASS 344 g WITH THE GRIP, BALANCE POINT 193 FROM THE BUTT (FROM THE 3D MODEL).


PICKLEBALL PADDLE – HYBRID

GENERAL ARRANGEMENT · 390 × 190 × 10.6 mm · CF / WAVE-RIB SANDWICH

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-11-09		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-HY-001	F	1 / 4	A3	1:2	mm

PROJECTION	MATERIAL	STATUS
	SEE NOTES	ISSUED FOR REVIEW

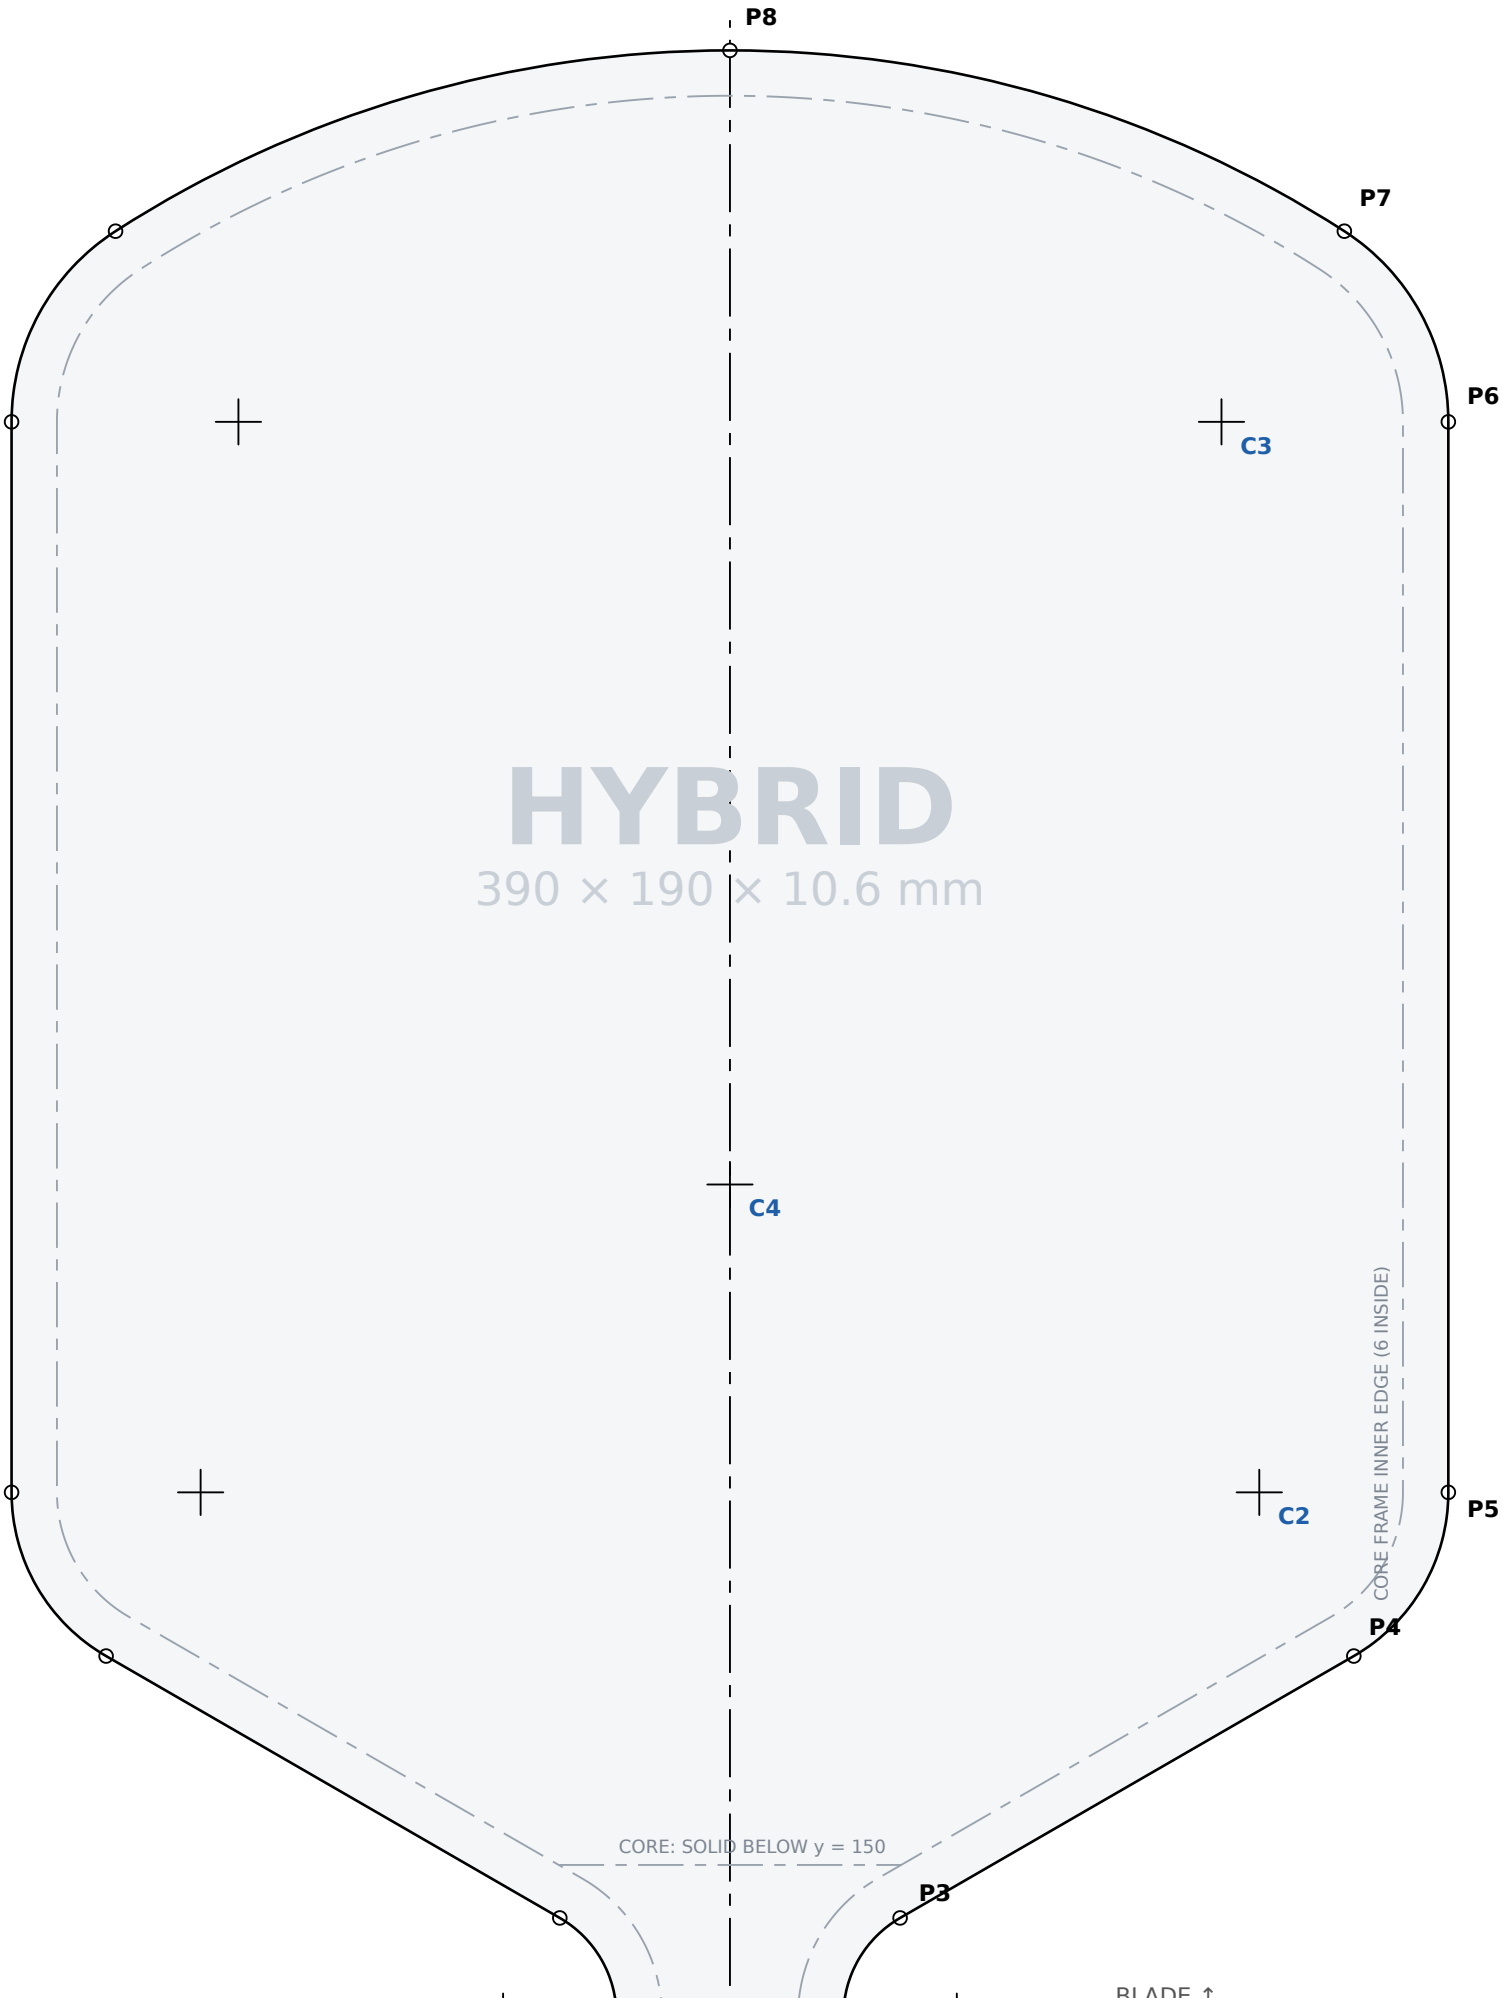



PROFILE GEOMETRY (RIGHT HALF; LEFT = MIRROR, X → −X)

ID	POINT	X	Y
P1	Butt corner	15.00	5.00
P2	Handle edge / throat arc	15.00	130.00
P3	Throat arc / taper	22.50	142.99
P4	Taper / shoulder arc	82.50	177.63
P5	Shoulder arc / side	95.00	199.28
P6	Side / crown-shoulder arc	95.00	340.87
P7	Crown shoulder / dome	81.25	366.09
P8	Apex (on centre line)	0.00	390.00
C1	Throat centre R15	30.00	130.00
C2	Shoulder centre R25	70.00	199.28
C3	Crown-shoulder centre R30	65.00	340.87
C4	Dome centre R150	0.00	240.00

Origin: centre of the grip's butt face (y = 0); the body starts at y = 5.
All arcs tangent. Dots = tangent points, + = arc centres.

SCALE CHECK – MUST MEASURE 100 mm



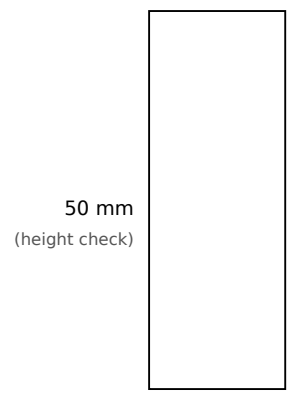


PICKLEBALL PADDLE – HYBRID

FULL-SIZE BODY TEMPLATE – FACE SHEETS + CORE

DRAWING No.	REV	SHEET	SCALE
PB-HY-001	F	2 / 4	**1:1**


DATE	DRAWN	UNITS
2026-11-09	Claude Code	mm

PRINT ON A3 AT 100 % / “ACTUAL SIZE” – NO FIT-TO-PAGE.
Verify both scale bars before cutting.

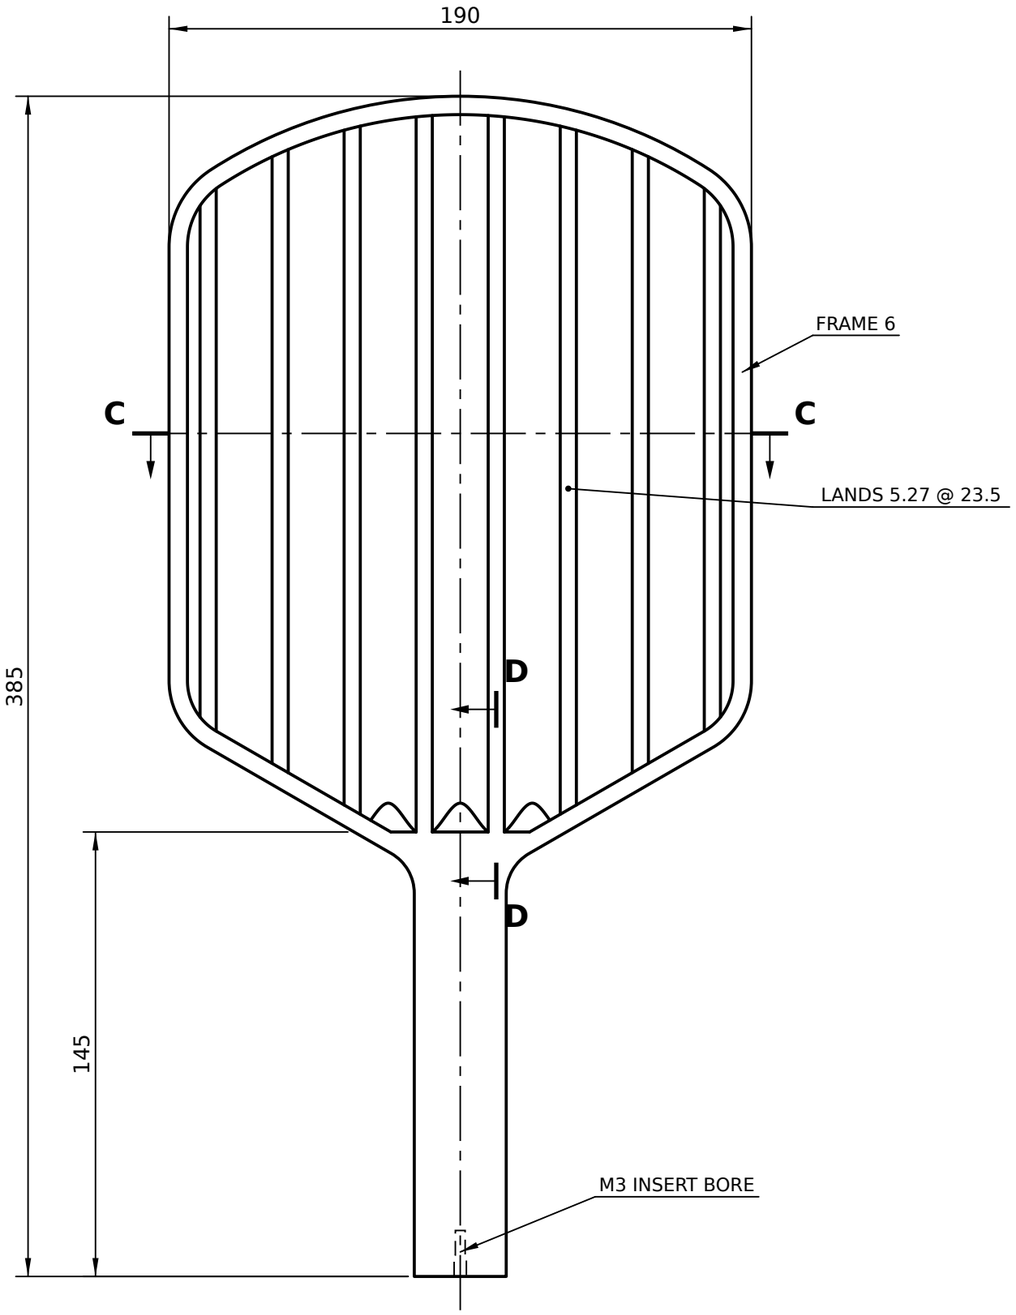


PLAN VIEW (TOP FACE)

SCALE 1:2 · BOTTOM LANDS OFFSET ½ PITCH

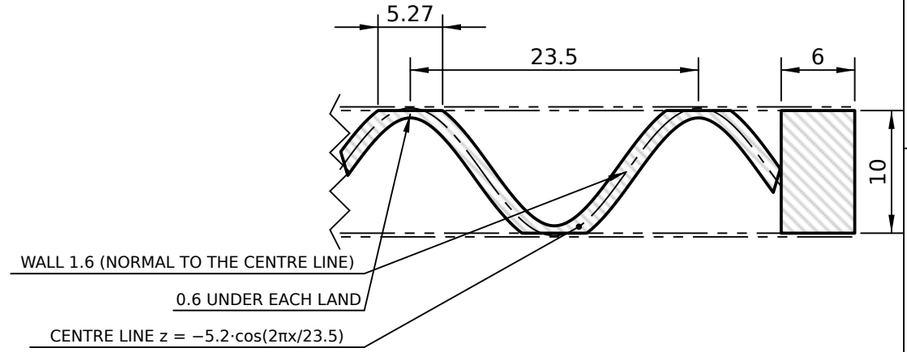

SECTION C–C (PART)

SCALE 2:1 · FACE SHEETS SHOWN PHANTOM

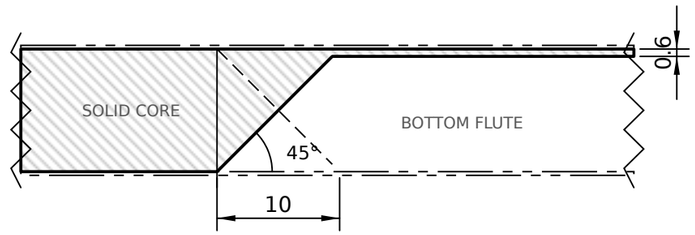

SECTION D–D (PART)

SCALE 2:1 · ON A LAND (x = 11.75), RAMP FROM y = 150; TOP FLUTES MIRROR IT

NOTES

1. MATERIAL: CARBON FIBRE / EPOXY, MOULDED IN ONE PIECE IN THE SHEET-4 MOULD (CHOPPED FIBRE 10–25 LONG, ≈ 40 % BY VOLUME, ρ ≈ 1.5 g/cm³). THE PRINTED STL (NOTE 8) IS A TRIAL PIECE / PRINTED ALTERNATIVE.
2. THICKNESS 10, SET BY THE MOULD: THE LID FLANGE SEATS ON THE TRAY RIM WITH THE PLUG FACE 10 ABOVE THE POCKET FLOOR (SHEET 4). BOTH FACES ARE BOND SURFACES.
3. WAVE RIB λ23.5 (8 WAVES ACROSS, CRESTS SYMMETRIC ABOUT THE CENTRE LINE), WALL 1.6, CENTRE-LINE AMPLITUDE 5.2; CRESTS CUT FLAT = LANDS 5.27 ON BOTH FACES.
4. FRAME 6, CLOSED. SOLID TO y = 150; EACH FLUTE ENDS IN A 45° RAMP, 10 LONG, LONGEST AT ITS OPEN FACE (D–D), SO THE MOULD TEETH PULL STRAIGHT OUT.
5. AFTER MOULDING DRILL Ø4 × 7 + Ø3.2 × 15 IN THE BUTT FACE AND BOND AN M3 BRASS INSERT (EPOXY) FOR THE GRIP SCREW – SEE PB-GR-002.
6. BONDING THE SKINS: ABRADE (P120) AND DEGREASE BOTH FACES, EPOXY, PRESS FLAT BETWEEN PLATENS OR IN A VACUUM BAG.
7. PRINT FILE output/rib_support/hybrid_rib_support.stl (TRIAL PIECE: CHECKS THE MOULD CLOSES): FLAT, BED ≥ 391 × 196.
8. MAIN ZONE IS y = 5 … 145 FROM THE BUTT FACE; THE RIB SUPPORT STARTS AT y = 5.


RIB SUPPORT – HYBRID

RIB SUPPORT (CORE) · MOULDED CARBON, ONE PIECE · 385 × 190 × 10 mm

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-11-09		


DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-HY-001	F	3 / 4	A3	1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	CARBON / EPOXY (NOTE 1)	ISSUED FOR REVIEW

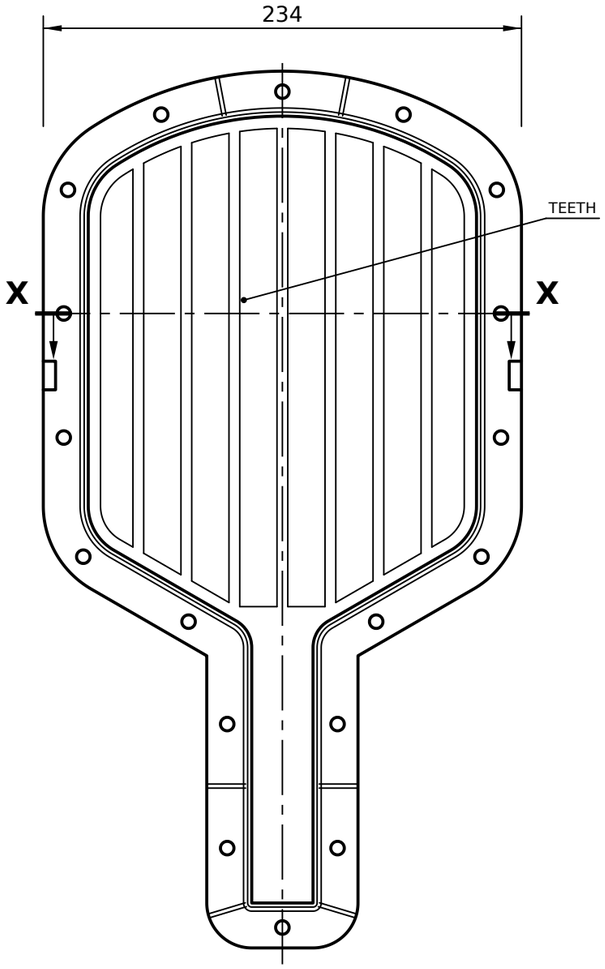


TRAY (BOTTOM HALF)

SCALE 1:3 · TEETH = BOTTOM FLUTES

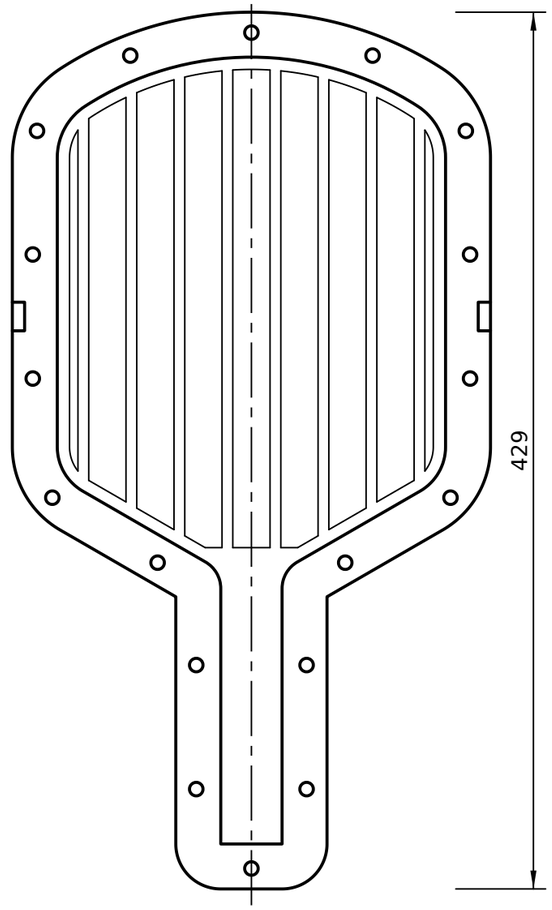


LID, UNDERSIDE

SCALE 1:3 · PLUG 2 HIGH · TEETH = TOP FLUTES

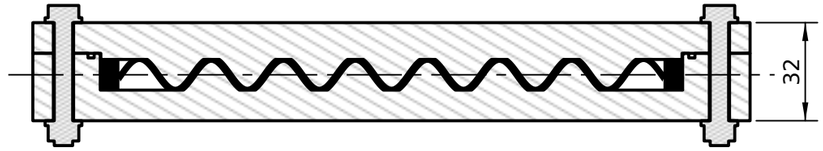

SECTION X–X

SCALE 1:2 · CLOSED MOULD, MOULDED RIB SUPPORT BLACK, M6 BOLT

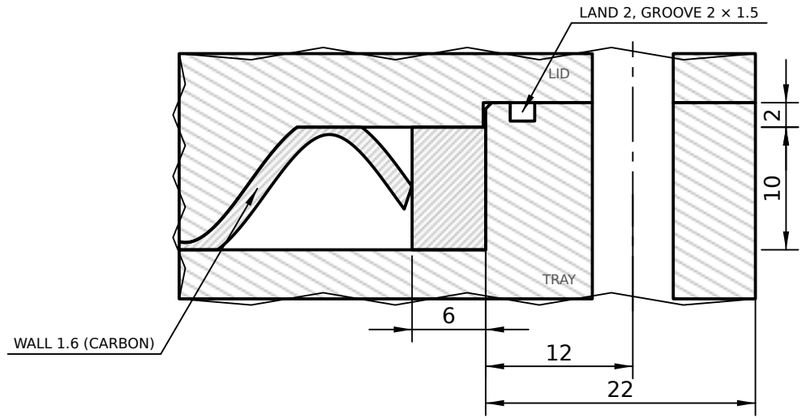

DETAIL Y

SCALE 2:1 · PLUG IN THE POCKET, 0.2 GAP PER SIDE · THE GAPS ARE THE WALLS AND THE FRAME

NOTES

1. TRAY (1) + LID (2): output/mould/hybrid_mould_bottom / _top (.stl / .step). THE CAVITY BETWEEN THEM IS THE RIB SUPPORT (SHEET 3); THE TEETH ARE ITS FLUTES. CORE HEIGHT 10, WALLS 1.6.
2. THE LID'S 2 PLUG SLIDES INTO THE POCKET (0.2 CLEARANCE PER SIDE) AND ALIGNS THE HALVES; THE LID FLANGE SEATING ON THE TRAY RIM LEAVES THE PLUG FACE 10 ABOVE THE POCKET FLOOR.
3. PRINT BOTH BACK DOWN, TEETH UP: ≥ 5 WALLS, ≥ 40 % INFILL, 0.12–0.16 LAYERS FOR THE TEETH. NEEDS A ≥ 440 mm BED, OR MACHINE THE STEP FROM ALUMINIUM. ABOUT 1.4 + 1.1 kg OF PLA AT 100 %.
4. PLA SOFTENS NEAR 55 °C: ROOM-TEMPERATURE-CURE EPOXY ONLY. FOR A WARM CURE PRINT IN PETG, ASA OR PA-CF.
5. DRY FIT FIRST: THE PLUG MUST SLIDE IN BY HAND (SAND IT IF IT BINDS), AND ON THE TRIAL RIB SUPPORT STL PRINTED IN PLA THE FLANGE MUST SEAT FULLY. THEN SAND THE CAVITY (P400 → P800), SEAL, WAX ×3 + PVA.
6. FILL (FORGED CARBON) ≈ 263 g: HALF CHOPPED CARBON TOW (10–25 mm), HALF EPOXY BY MASS. PACK THE WALL GAPS AND THE FRAME FIRST, THEN THE SOLID HANDLE ZONE, AND SPREAD THE REST EVENLY. THE OPEN TRAY HOLDS 2.5× THE PART.
7. CLOSE: LID ON, BOLTS (3) FINGER-TIGHT, PRESS BETWEEN 2 FLAT, STIFF PLATENS OR IN A PRESS UNTIL THE FLANGE SEATS; TIGHTEN THE BOLTS. EXCESS RESIN RISES PAST THE PLUG INTO THE OVERFLOW GROOVE AND OUT OF THE VENTS.
8. CURE (24 h AT ROOM TEMPERATURE), SPLIT AT THE PRY NOTCHES, LIFT THE LID STRAIGHT UP, EASE THE PART OUT FROM THE BUTT END WITH A PLASTIC WEDGE (NO EJECTOR HOLES). TRIM THE FLASH, DRILL AND FIT THE M3 INSERT (SHEET 3). THE PART WEIGHS ≈ 239 g.

MOULD HARDWARE

ITEM	PART	QTY
1	Tray, hybrid_mould_bottom.stl	1
2	Lid, hybrid_mould_top.stl	1
3	Hex bolt M6 × 45, 2 washers, nut	18
4	Release wax + PVA; flat platens + clamps or a press	a/r


RIB SUPPORT MOULD – HYBRID

RIB SUPPORT MOULD · TRAY + LID WITH PLUG, TEETH INTERLOCK · 234 × 429 mm

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-11-09		


DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-HY-001	F	4 / 4	A3	1:3, 1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	PLA / PETG (NOTE 2)	ISSUED FOR REVIEW

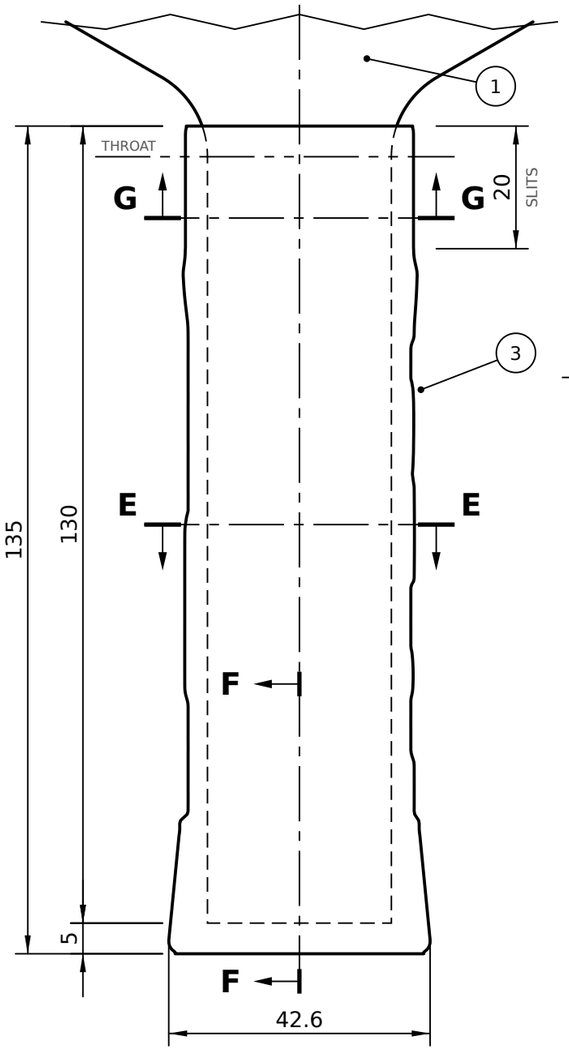


HANDLE IN THE GRIP (FACE VIEW)

SCALE 1:1 · DRAWN: CARBON MATRIX

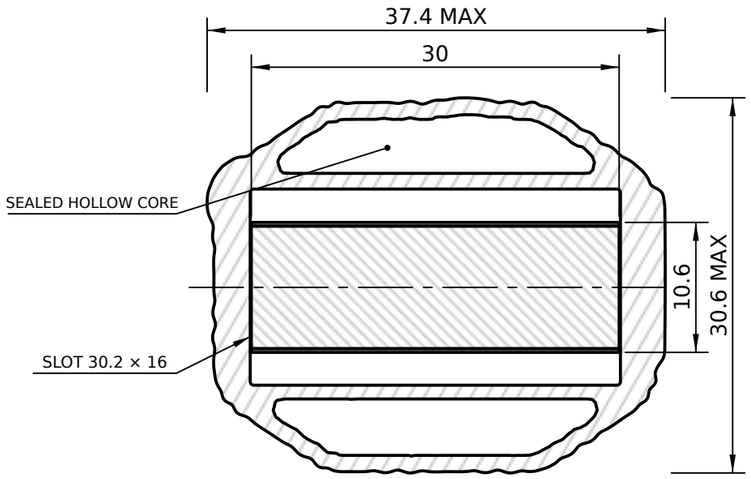


SECTION E–E

SCALE 2:1

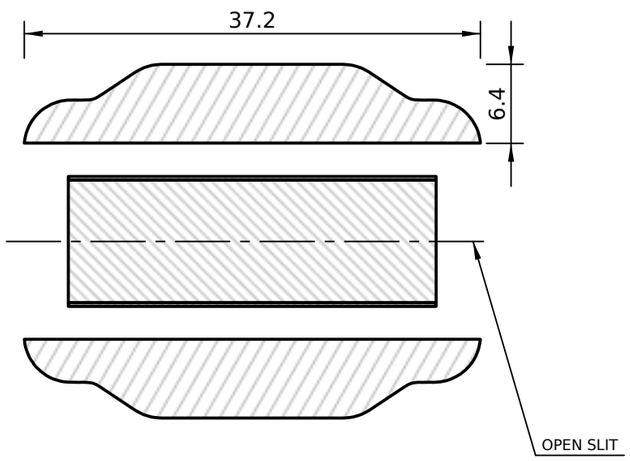


SECTION G–G

SCALE 2:1 · HEAD, IN THE SLIT ZONE (y = 120)

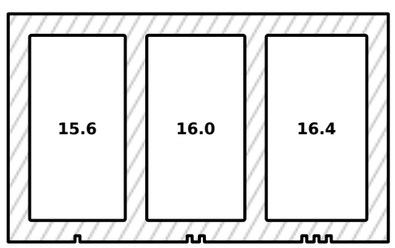

FIT-TEST COUPON (fit_test_slot.stl)

SCALE 1:1 · 8 THK · REV-8 SLOTS 15.6 / 16.0 / 16.4 × 30.2

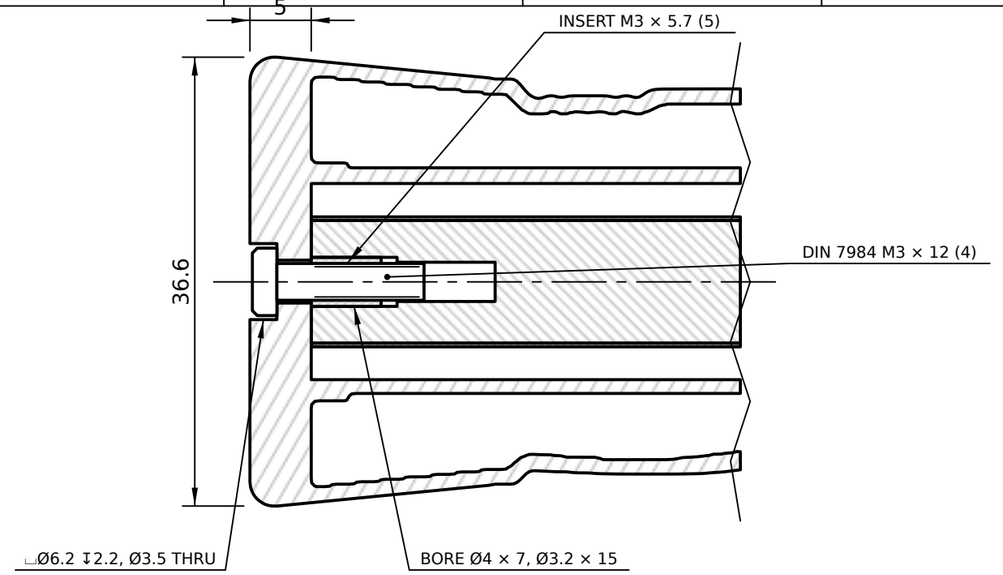

SECTION F–F (BUTT END)

SCALE 2:1

ITEM	PART	MATERIAL / SPECIFICATION	QTY	MASS g EL / HY
1	Face sheet	Woven carbon/epoxy 0.3 thk, cut to the profile DXF	2	23 / 21
2	Rib support	Moulded carbon, one piece – sheets 3 + 4 of PB-EL/HY-001	1	250 / 239
3	Grip	PLA printed, rev 8 (drawn CARBON MATRIX), slot: note 2	1	61
4	Screw	DIN 7984 M3 × 12 low-head cap screw, A2 stainless	1	1.0
5	Threaded insert	M3 brass, 5.7 long, bonded in a Ø4 bore	1	0.4
6	Adhesive	Epoxy: skins onto the rib support, insert	a/r	–
COMPLETE PADDLE WITH GRIP (3D MODEL)				**358 / 344**

NOTES

1. GRIP (3): ANY OF THE TEN REV-8 PRINTED GRIPS (pickleball_grips) - SAME INTERFACE, DIFFERENT SURFACE; DRAWN: CARBON MATRIX. PLA 60–65 g (61.2 g DRAWN). PRINT UPRIGHT, BUTT DOWN, 100 % INFILL, NO SUPPORTS.
2. REV-8 SLOT 30.2 × 16 × 130 DEEP, 1 LEAD-IN; HANDLE 30 × 10.6 (0.3 / 10 / 0.3, MOULDED) = 5.4 LOOSE. REGENERATE THE GRIPS WITH SLOT_T = 10.6 (pickleball_grips/scripts/grip_core.py) AND THE COUPON AT 10.2 / 10.6 / 11.
3. END WALLS SLIT OVER THE TOP 20 (y 115–135) SO THE THROAT FLARE (FROM y = 130) PASSES; THE GRIP SEATS ON THE BODY BUTT AT y = 5 (= GRIP BASE 5).
4. INSERT (5): BRASS M3 × 5.7, BONDED WITH EPOXY INTO THE Ø4 BORE DRILLED IN THE MOULDED CORE BUTT, FLUSH.
5. SCREW (4): DIN 7984 M3 × 12 LOW-HEAD (M3 × 16 ALSO FITS), LOW-STRENGTH THREADLOCKER, HAND-TIGHT (≈0.5 N·m) SO THE PLA BASE DOES NOT CRACK; 2.8 OF FLOOR UNDER THE HEAD.
6. OVERALL LENGTH 390 INCL. THE 5 GRIP BASE; HANDLE 130 FROM THE BUTT TO THE THROAT. MASS WITH GRIP 358 / 344 g (EL / HY).
7. SAME GRIP ON PB-EL-001 AND PB-HY-001. ALL DIMENSIONS IN mm.

PRINTED GRIP – PADDLE INTERFACE

PRINTED GRIP 135 LONG, SLOT 30.2 × 16 · M3 LOW-HEAD SCREW + BONDED INSERT · BOTH PADDLES

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-11-09		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-GR-002	F	1 / 1	A3	1:1, 2:1	mm

PROJECTION	MATERIAL	STATUS
	SEE BOM	ISSUED FOR REVIEW